INSTALL THE FOLLOWING	
QUANTITY	DESCRIPTION
1	DIGITAL CCTV CAMERA ASSEMBLY
1	FIELD EQUIPMENT CABINET
1	WIRELESS ETHERNET SYSTEM
1	CCTV WOOD POLE
1	METER BASE / DISCONNECT COMBINATION PANEL
5′	3-WIRE #12 COPPER FEEDER CONDUCTORS


INSTALL THE FOLLOWING
QUANTITY

DESCRIPTION

1

DYNAMIC MESSAGE SIGN (TYPE 2C)

DMS WALKWAY

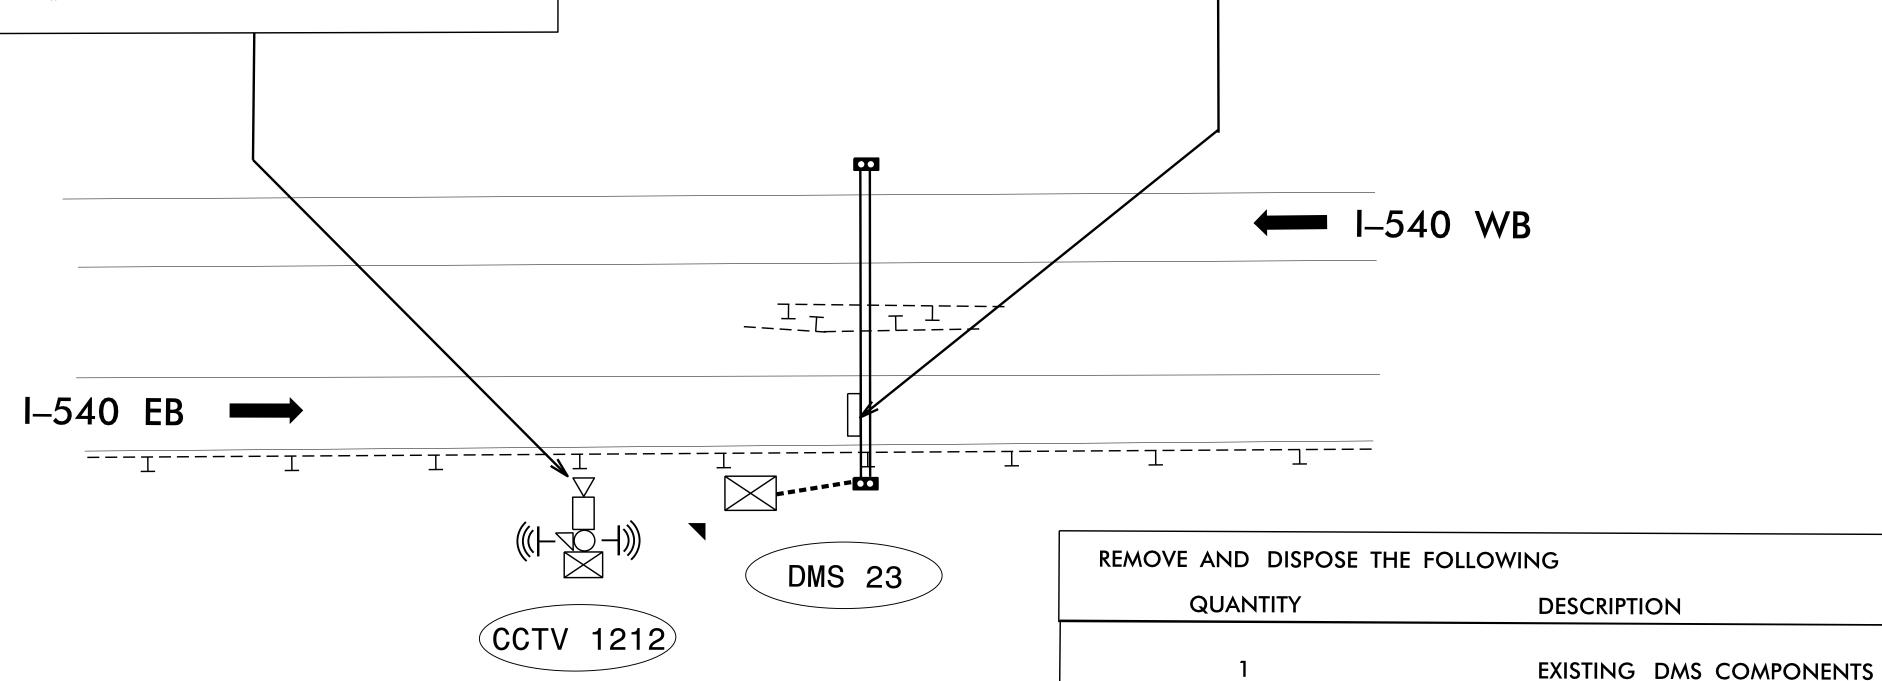

## DMS NOTES

- 1. REMOVE EXISTING DMS AND CABINET.
- 2. REMOVE DAMAGED SECTION OF EXISTING WALKWAY, INCLUDING I-BEAM SUPPORTS. INSTALL NEW DMS ON EXISTING OVERHEAD STRUCTURE. INSTALL NEW WALKWAY ON EXISTING STRUCTURE AND ENSURE DMS ALIGNS WITH NEW WALKWAY.
- 3. INSTALL NEW DMS CABINET AND BASE EXTENDER ON EXISTING FOUNDATION. ROUTE NEW POWER AND COMMUNICATIONS CABLES THROUGH EXISTING CONDUITS AND RISERS TO THE NEW DMS.
- 4. RELOCATE EXISTING CELL MODEM AND ANTENNA TO NEW DMS CABINET.
- 5. CONTRACTOR SHALL MAINTAIN AND RE-USE EXISTING ELECTRICAL SERVICE AND FEEDER CONDUCTORS FOR DMS.

## **CCTV NOTES**

- 1. REMOVE EXISTING CCTV CAMERA ASSEMBLY, EQUIPMENT CABINET, WIRELESS SYSTEM, CCTV WOOD POLE, AND CCTV ELECTRICAL SERVICE.
- 2. INSTALL NEW CCTV CAMERA ASSEMBLY, EQUIPMENT CABINET, WIRELESS SYSTEM, CCTV WOOD POLE, AND CCTV ELECTRICAL SERVICE.
- 3. REMOVE EXISTING CELL MODEM FROM CCTV EQUIPMENT CABINET AND RETURN TO DIVISION 5 REGIONAL ITS ENGINEER (919-825-2635).

MM 12

EXISTING DMS WALKWAY

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



ITS DEVICE REPLACEMENT

DIVISION 05 WAKE CO.

PLAN DATE: AUGUST 2021 REVIEWED BY: A.J.\_SKUCE,\_PE\_
PREPARED BY: J. WALDEN REVIEWED BY:

REVISIONS

