


CCTV 1214.5 GPS COORDINATES
 35.89958 N -78.61358 W

CCTV 1214 GPS COORDINATES
 35.89819 N
 -78.60948 W

INSTALL THE FOLLOWING	
QUANTITY	DESCRIPTION
1	DIGITAL CCTV CAMERA ** SEE NOTE 3, 6 & 7**

INSTALL THE FOLLOWING	
QUANTITY	DESCRIPTION
1	DIGITAL CCTV CAMERA ASSEMBLY
1	FIELD EQUIPMENT CABINET
1	INTERCONNECT CENTER
1	WIRELESS ETHERNET SYSTEM
1	CCTV WOOD POLE
1	METER BASE /DISCONNECT COMBINATION PANEL
5'	3-WIRE #12 COPPER FEEDER CONDUCTORS

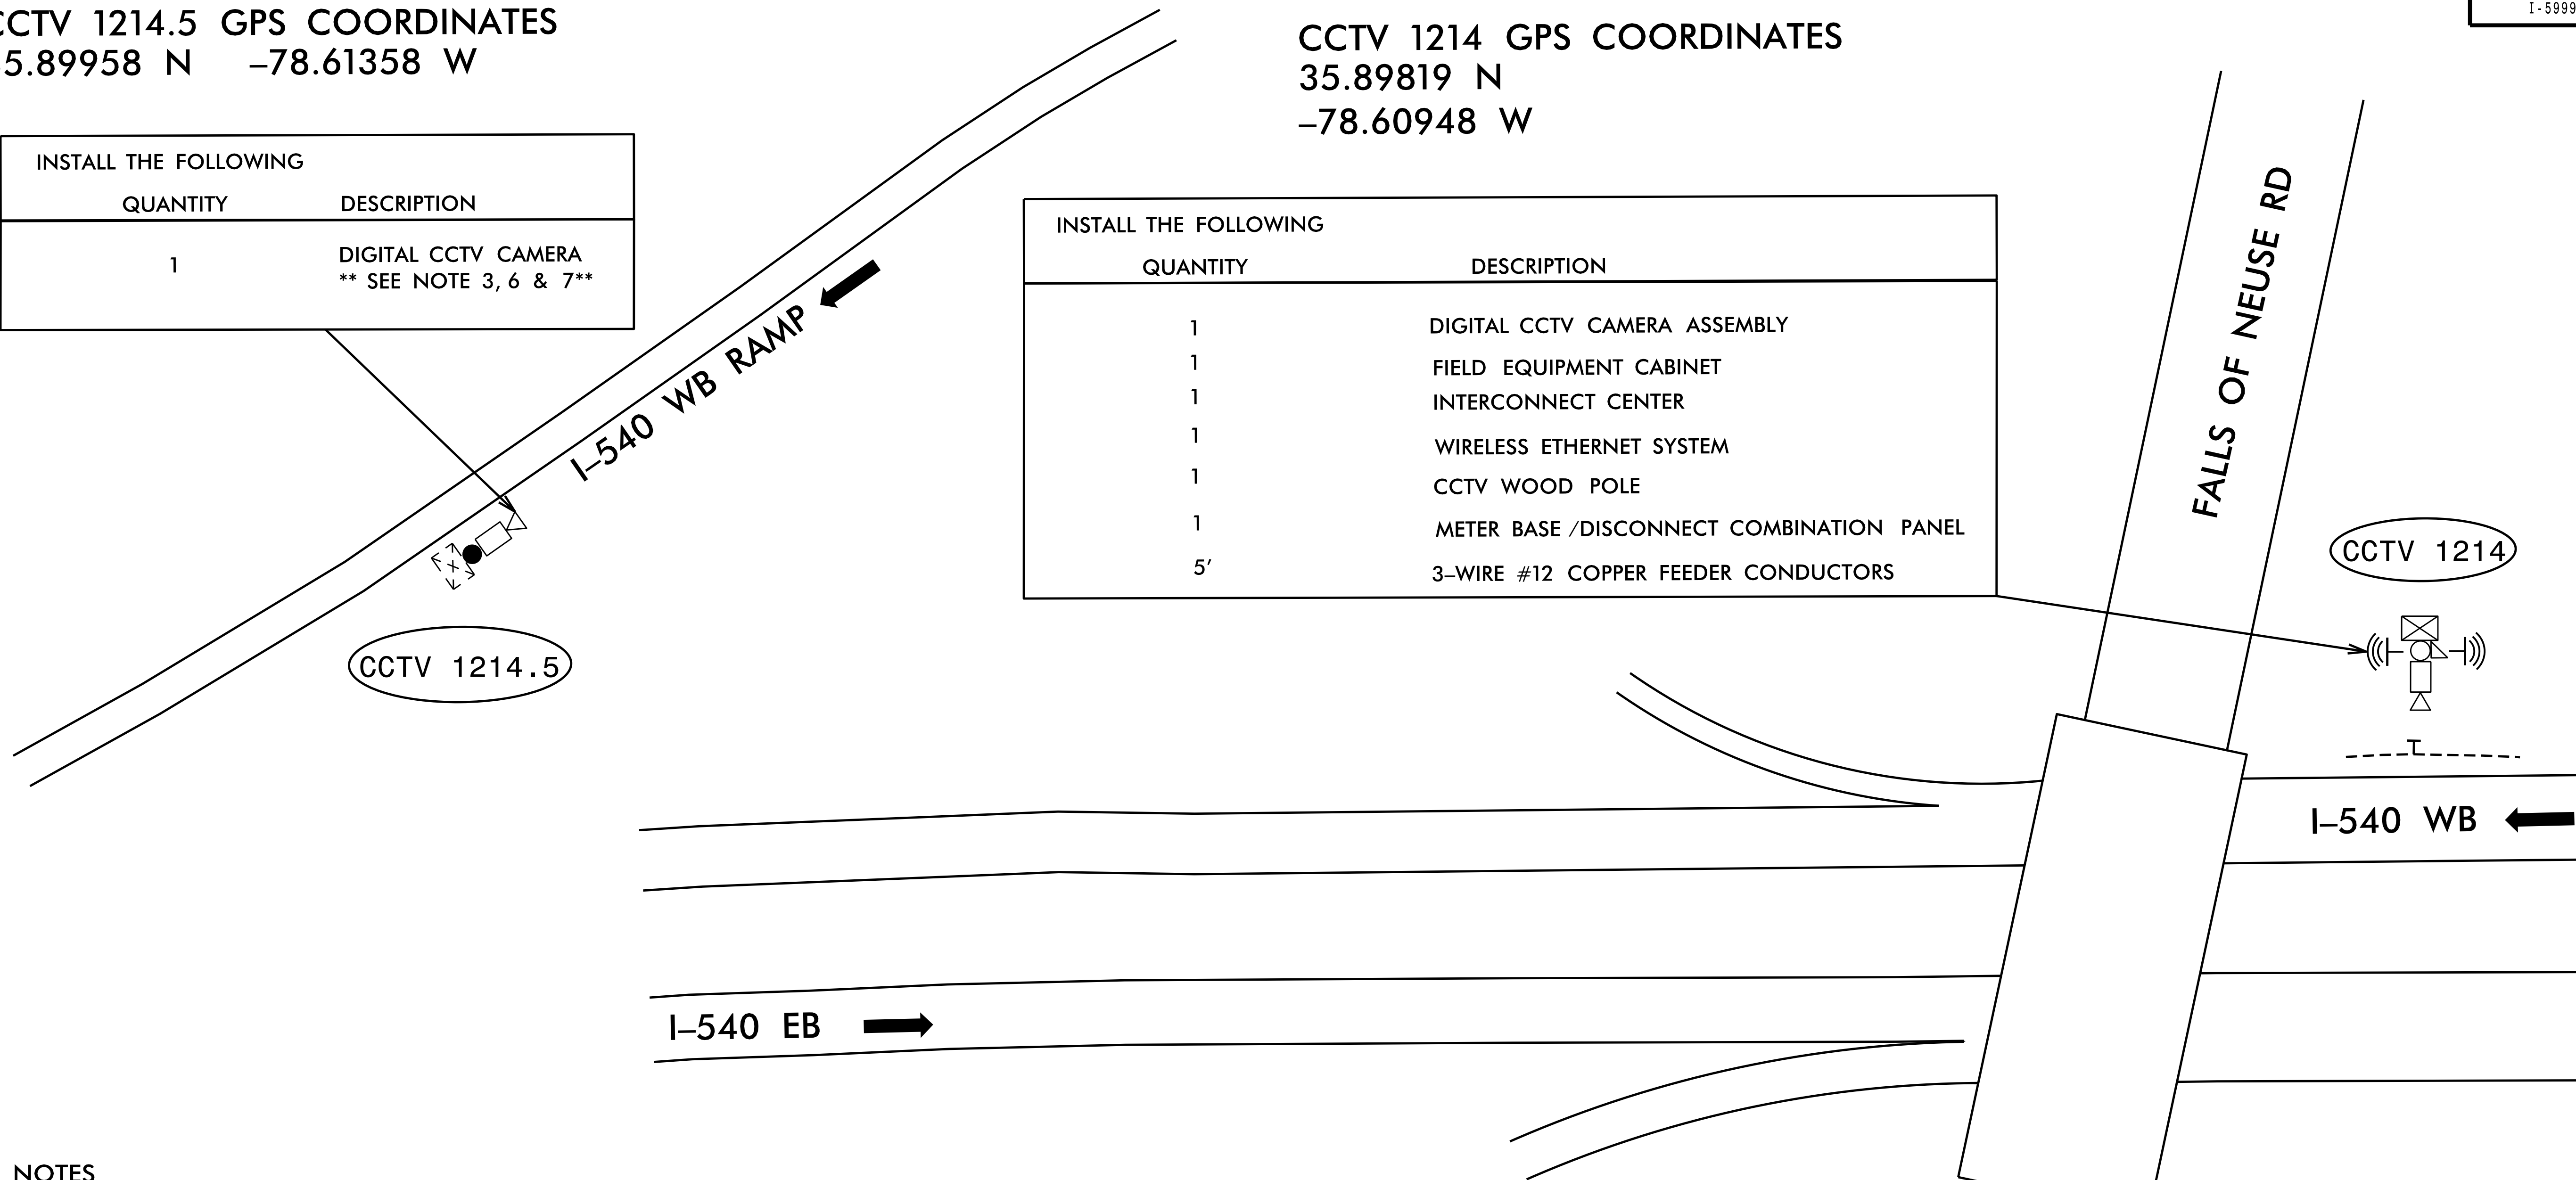

NOTES

1. REMOVE EXISTING CCTV CAMERA AT CCTV 1214, EQUIPMENT CABINET, INTERCONNECT CENTER, AND WIRELESS SYSTEM.
2. INSTALL NEW CCTV CAMERA AT CCTV 1214, EQUIPMENT CABINET, INTERCONNECT CENTER, AND WIRELESS SYSTEM ON EXISTING CCTV WOOD POLE.
3. REMOVE EXISTING CELL MODEM AND ETHERNET SWITCH AT CCTV 1214 AND RETURN TO DIVISION 5 REGIONAL ITS ENGINEER (919-825-2635). RETAIN EXISTING CELL MODEM AT CCTV 1214.5
4. ENSURE EXISTING FIBER OPTIC CABLE CONNECTIONS ARE LABELED BEFORE DISCONNECTING. RESPLICE OR RECONNECT FIBER OPTIC CABLE BASED ON EXISTING TERMINATION CONFIGURATION. WORK IS NOT COMPLETE UNTIL ALL FIBER OPTIC COMMUNICATIONS ARE OPERATIONAL.
5. CONTRACTOR SHALL MAINTAIN AND RE-USE EXISTING ELECTRICAL SERVICE AND FEEDER CONDUCTORS.
6. REMOVE EXISTING CCTV CAMERA AT CCTV 1214.5
7. INSTALL NEW CCTV CAMERA AT CCTV 1214.5 ON EXISTING CCTV WOOD POLE.

MM 14

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

	ITS DEVICE REPLACEMENT	
	DIVISION 05 WAKE CO.	
750 N. Greenfield Pkwy., Garner, NC 27529 SCALE:	PLAN DATE: AUGUST 2021 PREPARED BY: B. CHRISTIAN	REVIEWED BY: A. J. SKUCE, PE REVIEWED BY:
	REVISIONS _____ _____	INIT. DATE _____ _____