



p:\gfn\pw\bentley.com\gfn\pw-01\Documents\Projects\67945\5-Working\Task_010 - I-5955 Greensboro Rehab\Structures\CAD\2.0 100% Plans\405_001_I-5955_SMU_GD01_001_400329
11/17/2022 9:53:14 AM pdf_color_gfcit_FS.plt

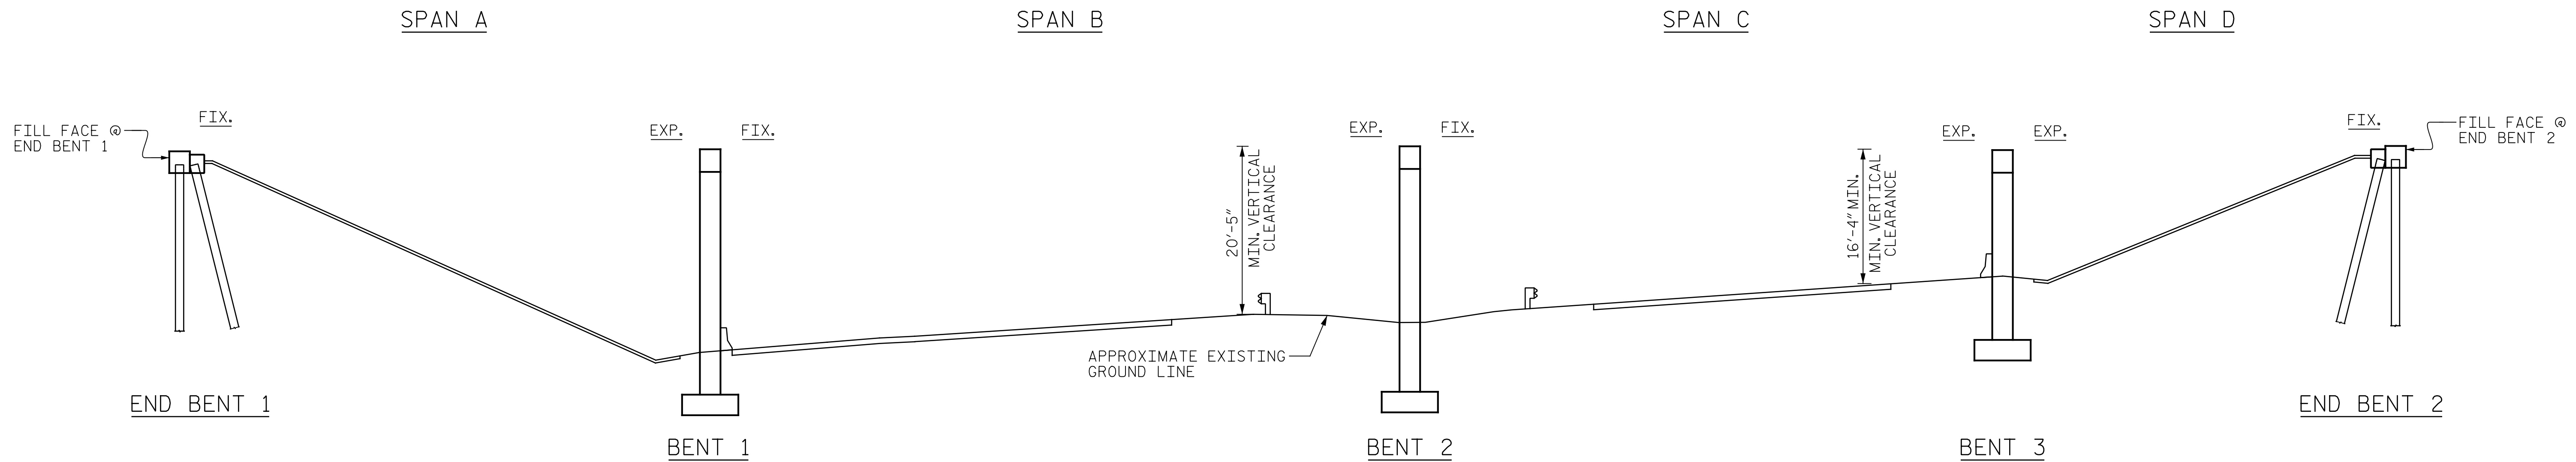

SECTION ALONG C BRIDGE
(SECTION AT BENTS AND END BENTS ARE AT RIGHT ANGLES)

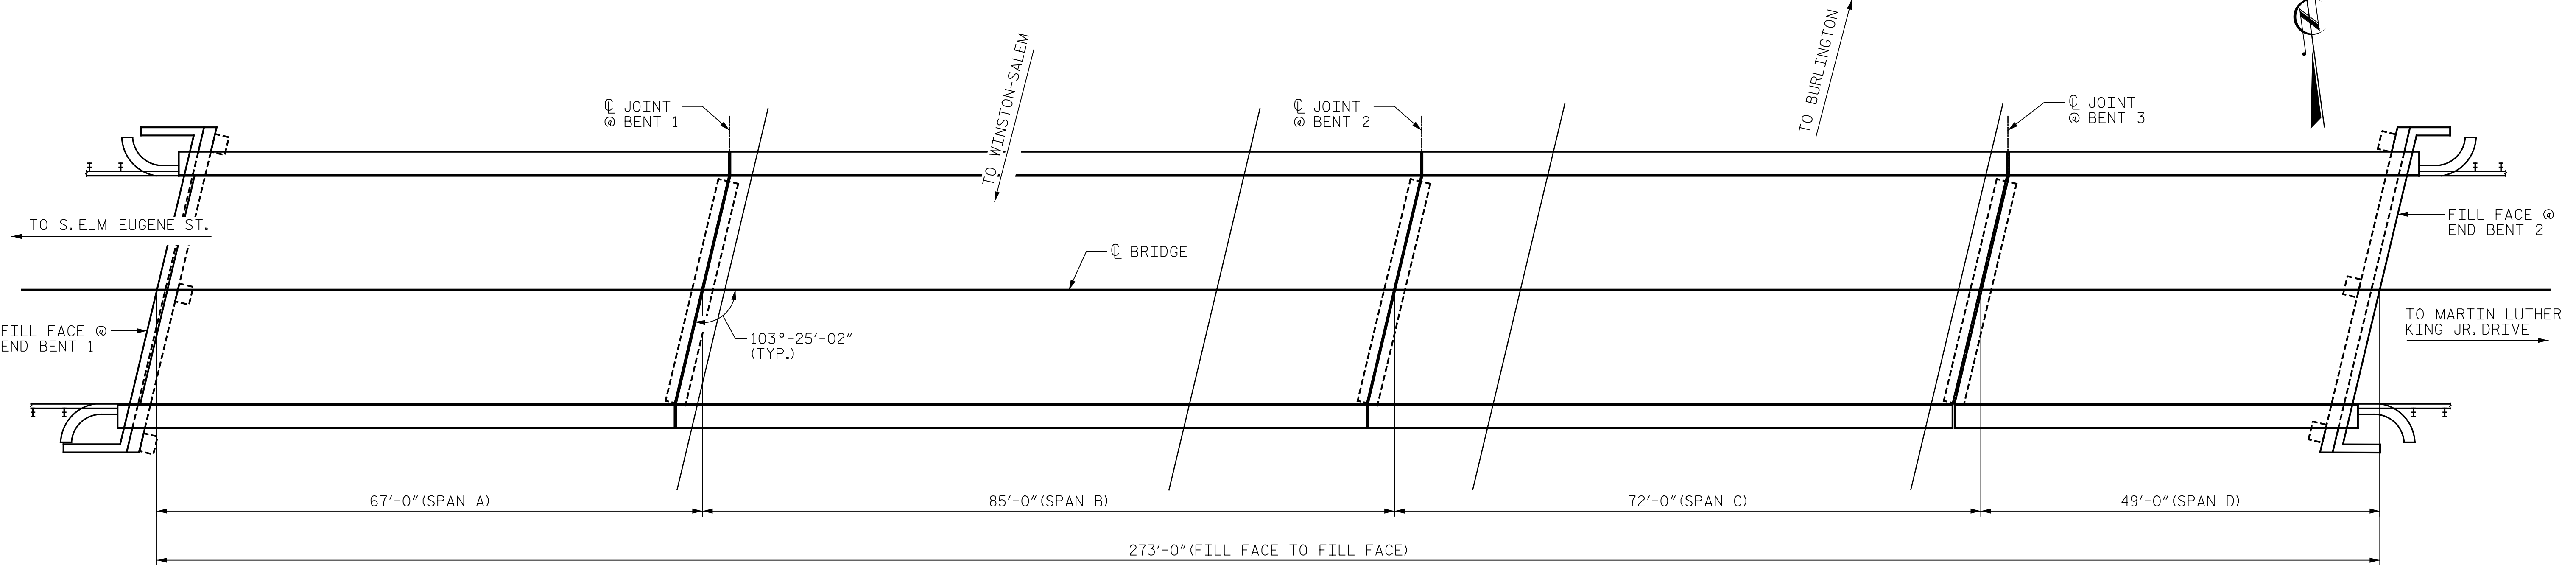

PLAN
(PILES NOT SHOWN FOR CLARITY)

NOTE:
GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 02/17/2021.

BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS AND ROUTINE INSPECTION REPORT.

- SCOPE OF WORK**
- REMOVE ASPHALT WEARING SURFACE AND PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION.
 - OVERLAY PREPARED TOP OF BRIDGE DECK WITH ASPHALT WEARING SURFACE (AWS).
 - REMOVE EXISTING JOINT AND INSTALL PLUG JOINTS.
 - MILL AND REPAVE ASPHALT APPROACH ROADWAYS.
 - REMOVE DEBRIS FROM TOP OF EXISTING BENT CAPS AND APPLY EPOXY COATING.
 - EPOXY RESIN INJECTION OF CONCRETE CRACKS.
 - REMOVE UNSOUND CONCRETE AND PROPERLY PREPARE EXISTING END BENT AND BENT AREAS FOR SHOTCRETE AND CONCRETE REPAIRS.

I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

RESIDENT ENGINEER _____ DATE _____




PROJECT NO. I-5955
GUILFORD COUNTY
BRIDGE NO. 400329

SHEET 1 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING
FOR BRIDGE ON PATTON
AVENUE OVER I-40

DRAWN BY: J. MYA DATE: 10/2022
CHECKED BY: J. YANNACCONE DATE: 10/2022

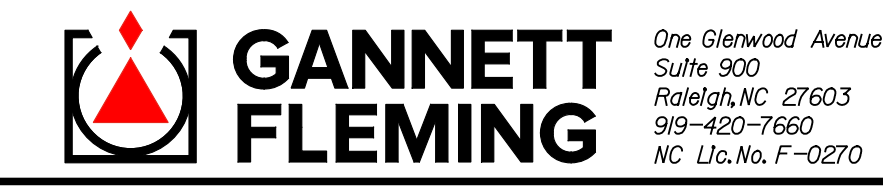

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S5-1
1			3			TOTAL SHEETS
2			4			127