


p:\gfnnet-pw\bentley.com\gfnnet-pw-01\Documents\Projects\67945\5-Work\Task 010 - I-5955 Greensboro Rehab\Structures\CAD\2.0 100% Plans\406_007_I-5955_SMU_S01_004_400336
 11/17/2022 9:54:45 AM pdf_color_gfclt_FS.plt I-5955.tbl

SUMMARY OF QUANTITIES		
	ESTIMATE	ACTUAL
SHOTBLASTING BRIDGE DECK	1915 SQ. YDS.	
SILANE DECK TREATMENT	1915 SQ. YDS.	

 SHOTBLAST BRIDGE DECK & SILANE DECK TREATMENT

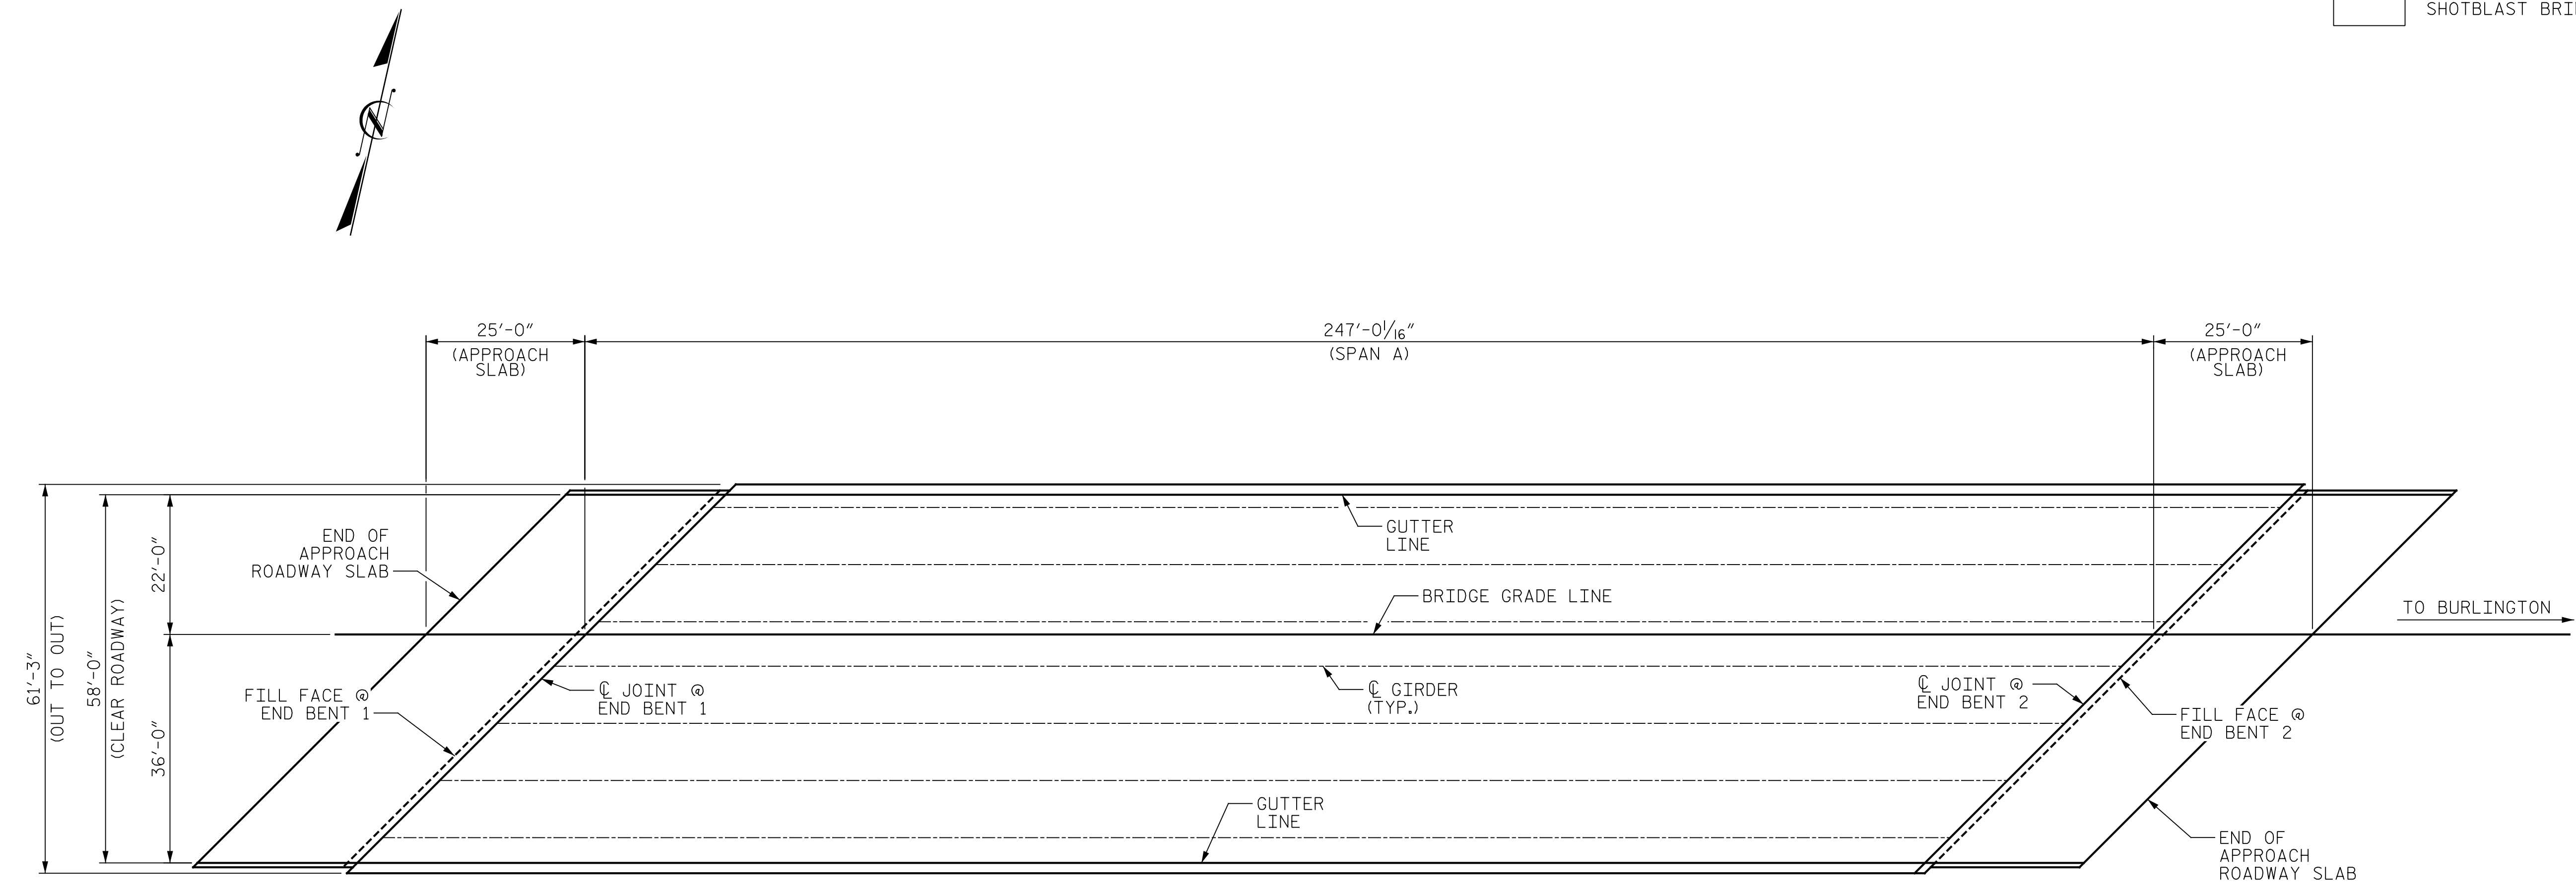


APPROACH SLAB @ END BENT 1 SPAN A APPROACH SLAB @ END BENT 2
PLAN

NOTES:

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE.

CONCRETE COVER FOR TOP BARS IN THE DECK SLAB IS 2 1/2" PER THE EXISTING BRIDGE PLANS.


PROJECT NO. I-5955
GUILFORD COUNTY
 BRIDGE NO. 400336

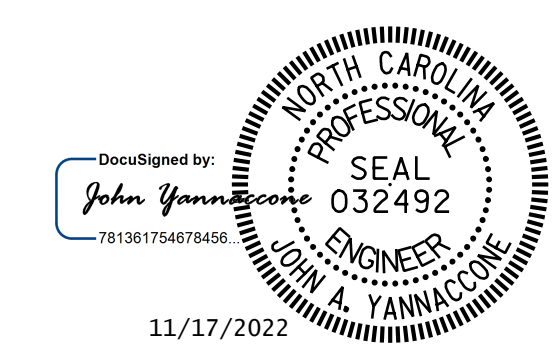

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

PLAN OF SPANS

DRAWN BY : J. MYA DATE : 10/2022
 CHECKED BY : J. YANNACCONE DATE : 10/2022

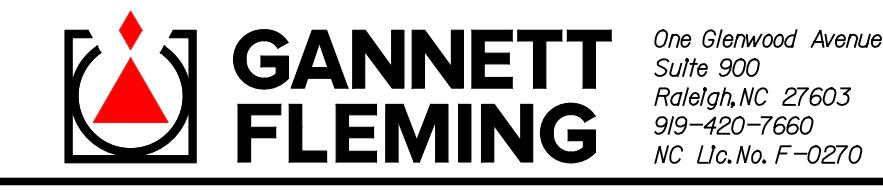

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			127
2			4			