




TYPICAL SECTION NO. 3

USE FOR SECTION OF MAP 2 FROM 400' NORTH OF SPENCER AVE TO ALBEMARLE RD

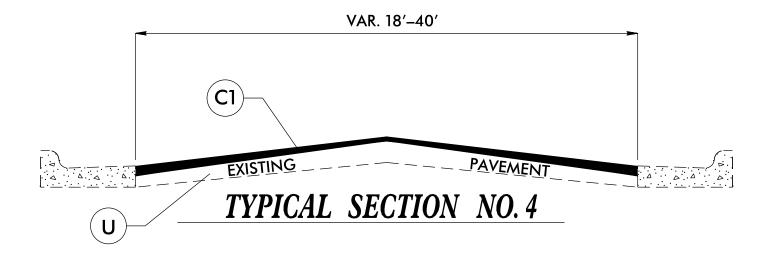

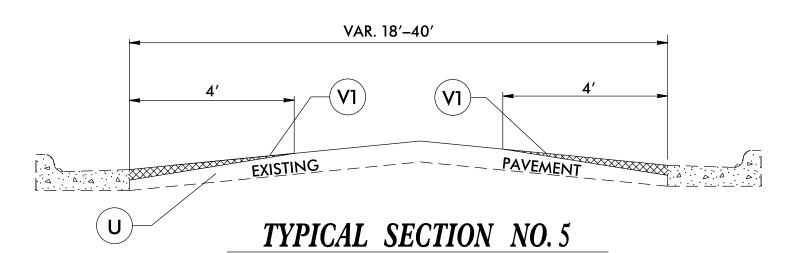

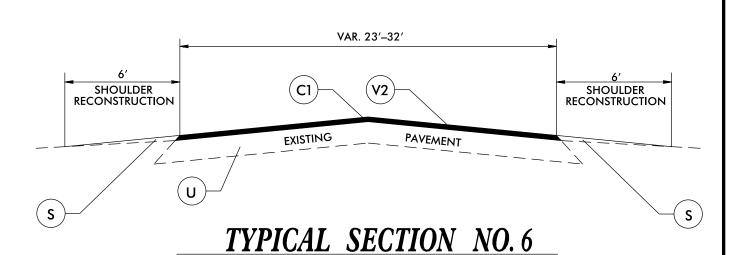

2023CPT.08.15.10761 2023CPT.08.15.20761

USE FOR BRIDGE ON MAP 13

| PAVEMENT SCHEDULE | |
|-------------------|------------------------------------------------------------------------------------------------------------------|
| C1 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| C2 | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD. |
| C3 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| D1 | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| D2 | PROP. APPROX. 3.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD. |
| F1 | PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE |
| S | AGGREGATE SHOULDER BORROW |
| U | EXISTING PAVEMENT. |
| V1 | MILLING 0" TO 1.5" IN DEPTH |
| V2 | MILLING 1.5" IN DEPTH |
| V3 | MILLING 4.0" IN DEPTH |