

SPAN D

APPROACH SLAB

DECK SURFACE REPAIR QUANTITY TABLE

SPAN D		
	ESTIMATE	ACTUAL
CONCRETE DECK REPAIR FOR SILANE DECK TREATMENT	0.0 CU. FT	
CONCRETE REPAIR	2.5 CU.FT.	
SHOTBLASTING BRIDGE DECK	1154.4 SQ. YDS.	
SILANE DECK TREATMENT	1154.4 SQ. YDS.	
BRIDGE JOINT DEMOLITION	69.0 SQ.FT.	
SURFACE PREPARTAIION FOR CONCRETE BARRIER RAIL	797.0 SQ.FT.	
SILANE BARRIER RAIL TREATMENT	797.0 SQ.FT.	
APPROACH SLAB		
	ESTIMATE	ACTUAL
CONCRETE DECK REPAIR FOR SILANE DECK TREATMENT	0.0 CU. FT	
CONCRETE REPAIR	0.0 CU.FT.	
SHOTBLASTING BRIDGE DECK	29.4 SQ. YDS.	
SILANE DECK TREATMENT	29.4 SQ. YDS.	
BRIDGE JOINT DEMOLITION	69.0 SQ. FT.	
SURFACE PREPARTAIION FOR CONCRETE BARRIER RAIL	136.0 SQ.FT.	
SILANE BARRIER RAIL TREATMENT	136.0 SQ.FT.	

NOTES


DECK SURFACE REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR AFTER REMOVAL OF UNSOUND CONCRETE. (MIN. 2" CLEAR TO SAWCUT). SEE CONCRETE FOR DECK REPAIR SPECIAL PROVISION.

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE REPAIR QUANTITY TABLE.

FOR SECTION A-A, SEE "FOAM JOINT SEALS FOR PRESERVATION DETAILS" SHEET.

- CONCRETE REPAIR AREA
- BRIDGE JOINT DEMO

PROJECT NO. **15BPR.59**
WAKE COUNTY
 BRIDGE NO. **911084**

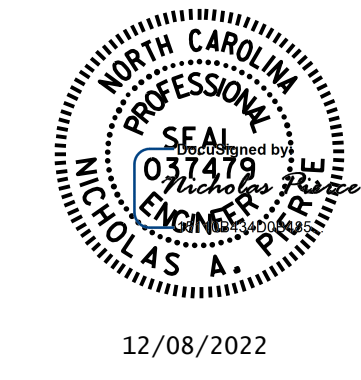

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 DECK SURFACE REPAIR
**SPAN D AND
 APPROACH SLAB**

DRAWN BY : D.A. CANTRELL DATE : 03/2021
 CHECKED BY : A.Y. GODFREY DATE : 10/2022
 DESIGN ENGINEER OF RECORD : N.A. PIERCE DATE : 12/2022

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			21
2			4			