


**CONTRACT: C204715 STATE PROJECT: 17BP.14.R.212**

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN  
JACKSON COUNTY**

**LOCATION: SR 1336 (MONTEITH GAP ROAD) FROM NORTH OF  
SR 1002 (OLD CULLOWHEE ROAD) TO NORTH OF  
SR 1337 (LEDBETTER ROAD)**

PROJECT NO. 17BP.14.R.212	SHEET NO. SIGN-1
APPROVED: <u>Ron King</u>	
DATE: 3/7/2022	
SEAL	
	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS
910.40	SINGLE/TWO LANE ROUNDABOUT WITH PEDESTRIAN

**GENERAL NOTES**

- SIGNS FURNISHED BY STATE
- CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**SUMMARY OF QUANTITIES**

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	523	L.F.
4102000000	904	SIGN ERECTION, TYPE E	48	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE E	1	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	24	EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	1	EA.

**PROJECT NOTES**

1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
2. RELOCATE SIGN, TYPE E


**INDEX**

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	E SHEET
SIGN-3 & 3A	SIGN DETAIL SHEETS

**PLAN REVIEWED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT**

\_\_\_\_\_ SIGNING & DELINEATION STANDARDS ENGINEER

\_\_\_\_\_ SIGNING & DELINEATION PROJECT DESIGN ENGINEER

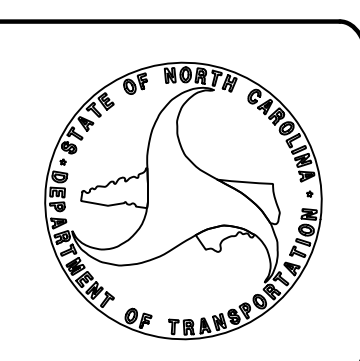

**PLAN PREPARED BY: HDR Engineering, Inc. of the Carolinas**


RON KING, P.E. PROJECT ENGINEER

RICHARD DRAYTON PROJECT DESIGN ENGINEER




HDR Engineering, Inc. of the Carolinas  
555 Fayetteville St, Suite 900 Raleigh, N.C. 27601  
N.C.B.E.L.S. License Number: F-0116

APPROVED: *Ron King*  
 DATE: 1/21/2022

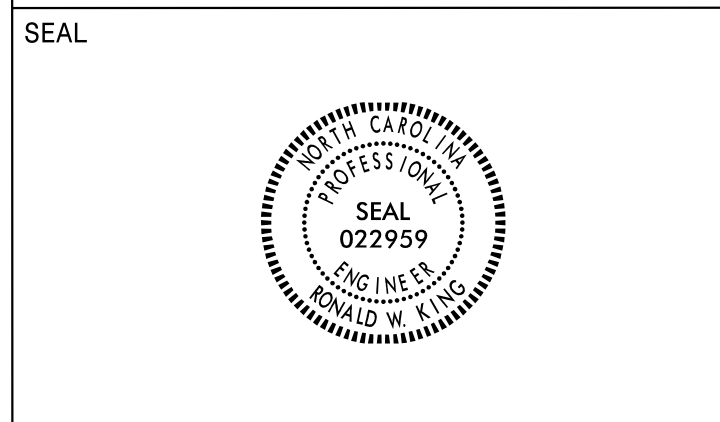

**DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED**

401 QUANTITY REQ'D 2



18 X 24  
W16-1P

MOUNT BELOW SIGN 402  
IN 3 INSTALLATIONS

407 QUANTITY REQ'D 6



21 X 15  
W16-7P

YELLOW/GREEN REFLECTIVE SHEETING

MOUNT BELOW SIGN 408  
IN 3 INSTALLATIONS


412 QUANTITY REQ'D 2



24 X 18  
R3-17

ONE "U" POST PER SIGN

402 QUANTITY REQ'D 2

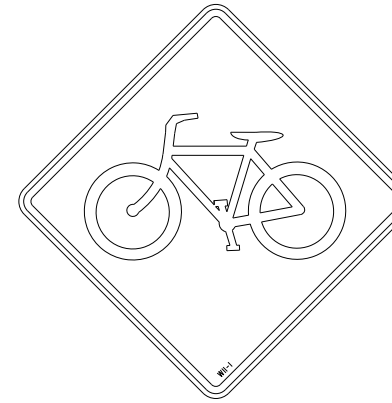

30 X 30  
W11-1

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 6




30 X 30  
W11-2

YELLOW/GREEN REFLECTIVE SHEETING

ONE "U" POST PER SIGN


413 QUANTITY REQ'D 1



24 X 8  
R3-17bP

MOUNT BELOW SIGN 412  
IN 1 INSTALLATION


403 QUANTITY REQ'D 4



24 X 30  
R2-1

ONE "U" POST


409 QUANTITY REQ'D 6



36 X 36 X 36  
R1-2

ONE "U" POST PER SIGN


414 QUANTITY REQ'D 1



30 X 30  
R1-1

ONE "U" POST


405 QUANTITY REQ'D 3

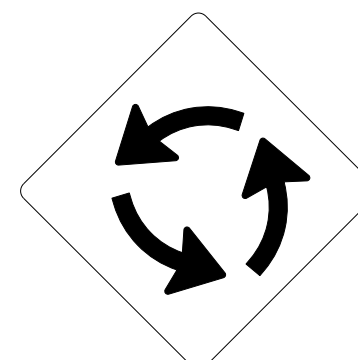

30 X 30  
W2-6

ONE "U" POST PER SIGN


410 QUANTITY REQ'D 3



30 X 24  
R6-4

ONE "U" POST PER SIGN


415 QUANTITY REQ'D 1



24 X 8  
R3-17aP

MOUNT BELOW SIGN 412  
IN 1 INSTALLATION


406 QUANTITY REQ'D 3

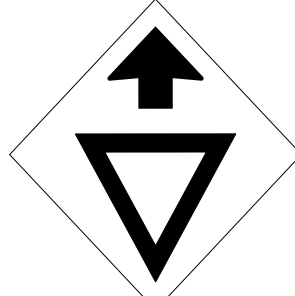

36 X 36  
W3-2A

ONE "U" POST PER SIGN


411 QUANTITY REQ'D 6

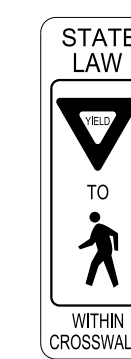

12 X 36  
R1-6

ONE "U" POST PER SIGN


419 QUANTITY REQ'D 1



30 X 30  
W14-2

ONE "U" POST

**TYPE "E" SIGNS**

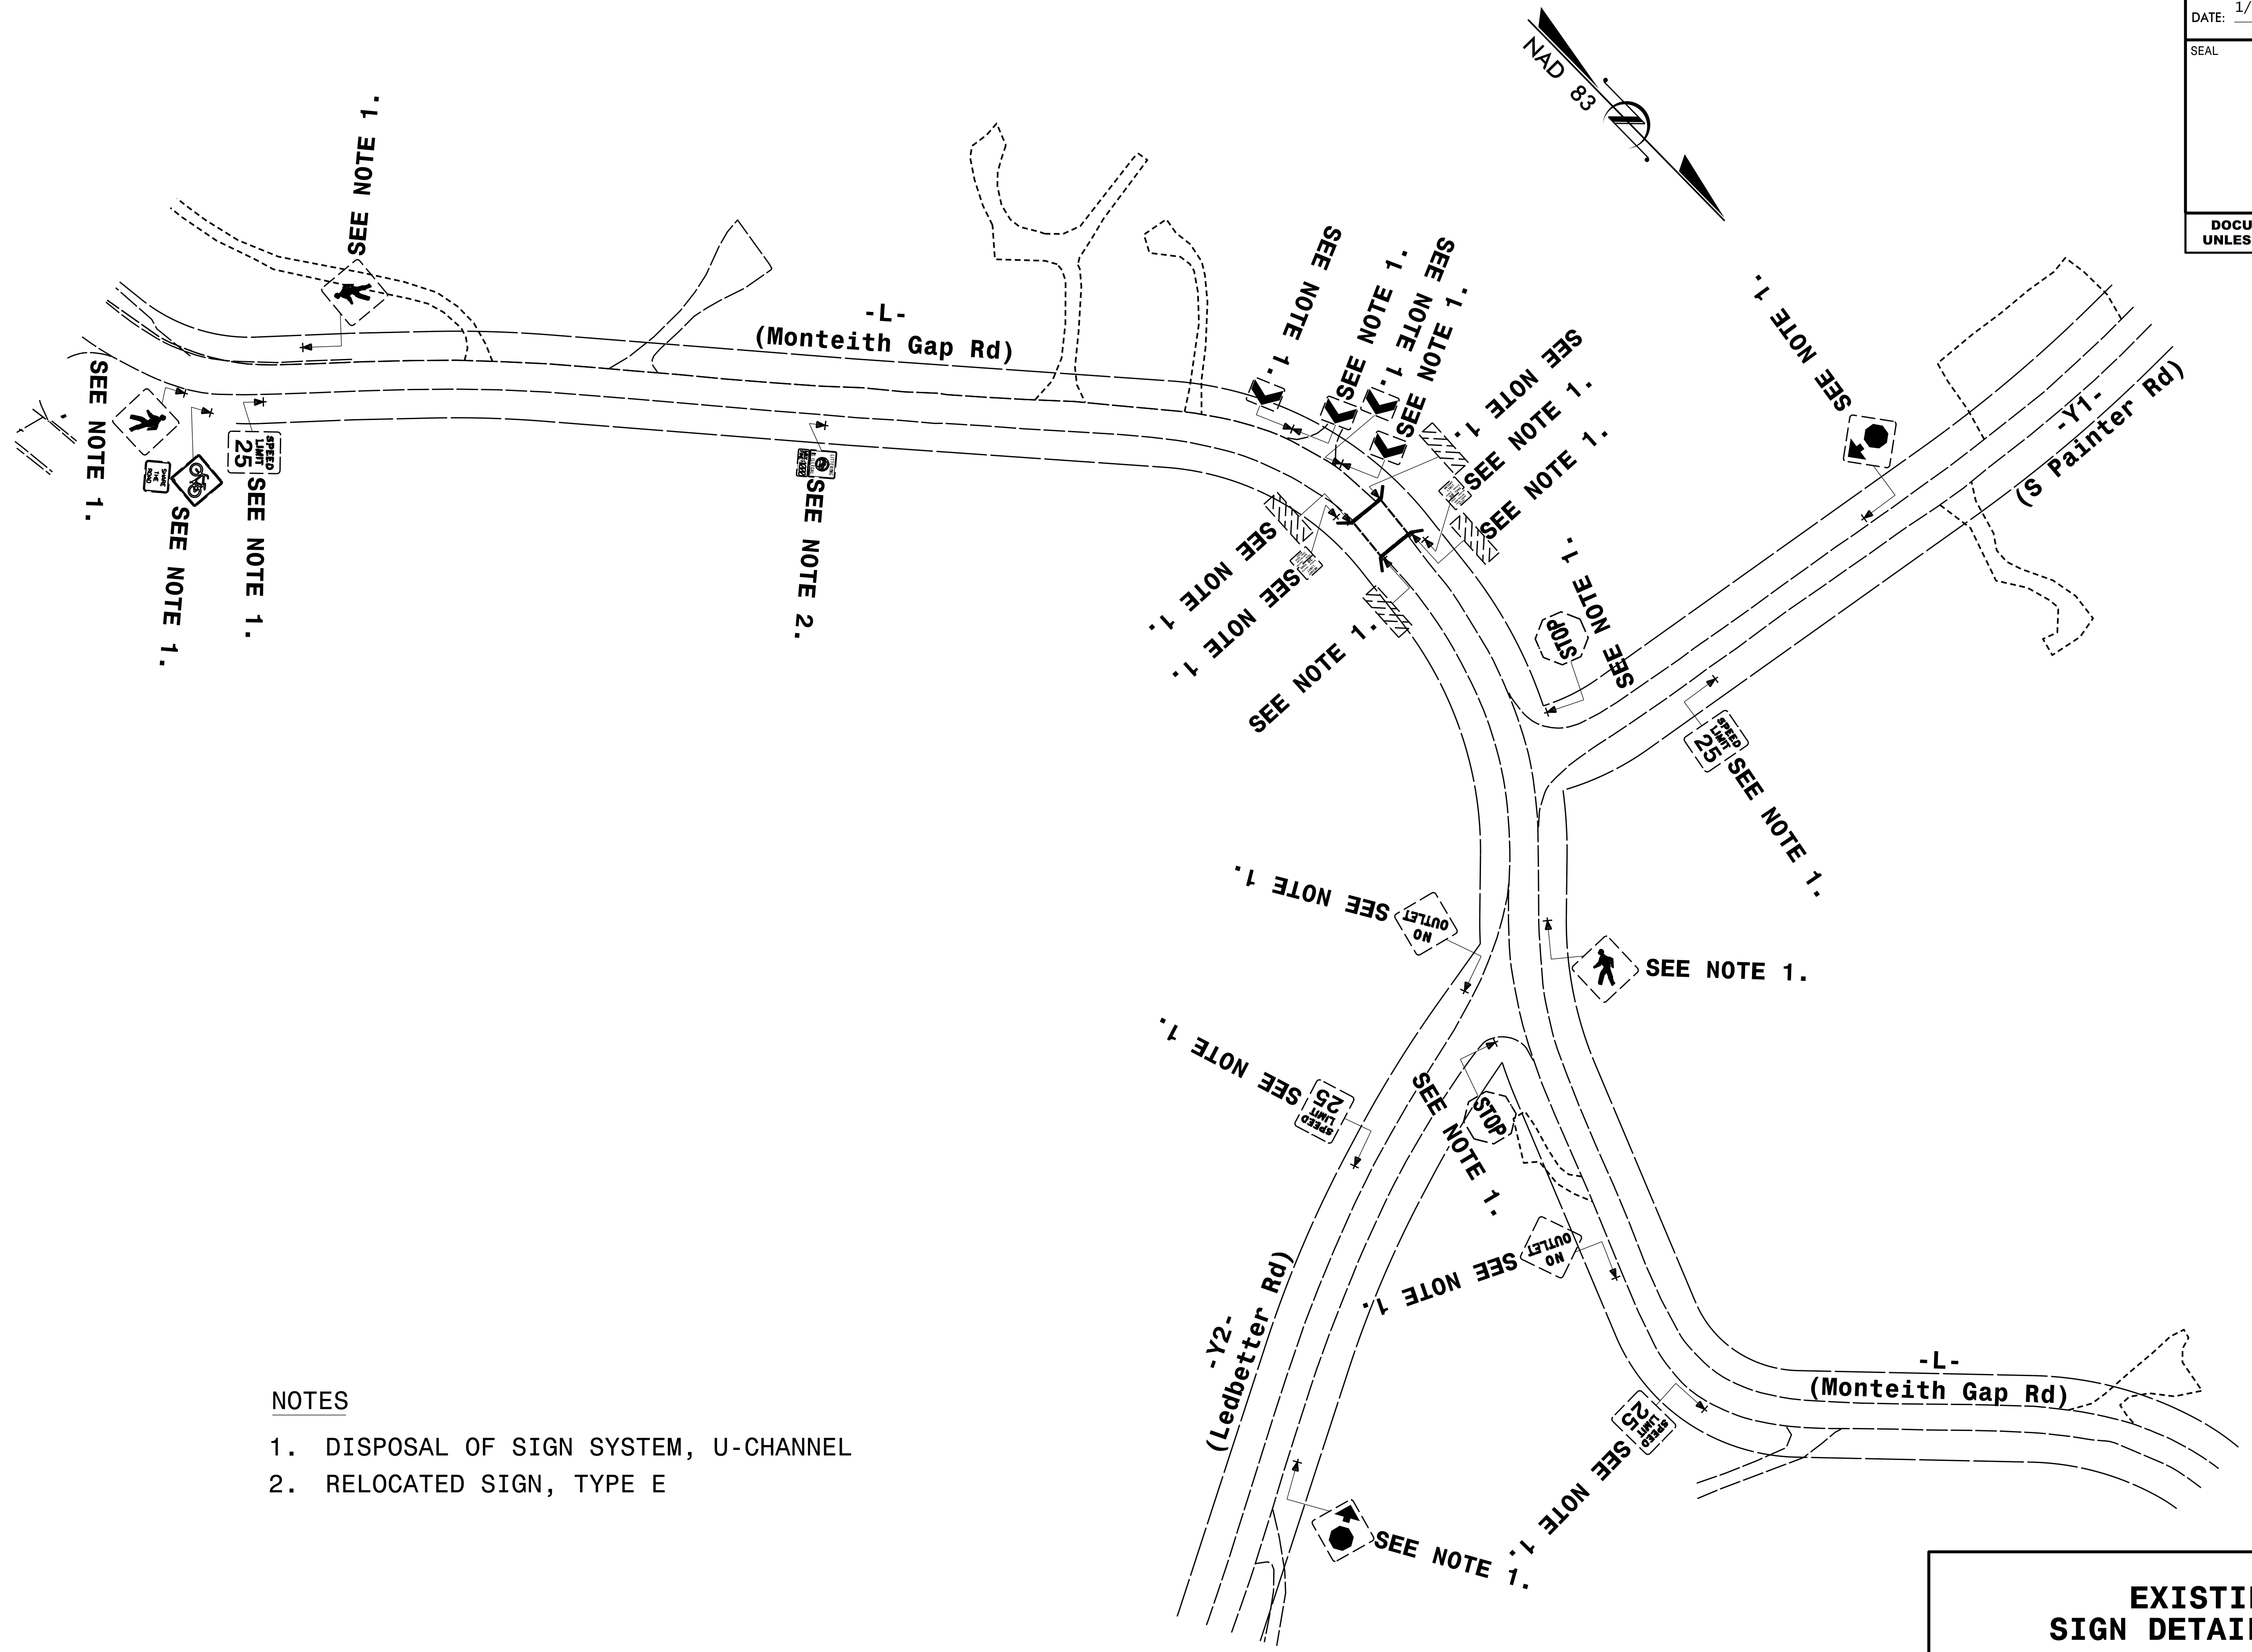


- NOTES**
- 1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
  - 2. RELOCATED SIGN, TYPE E

**EXISTING  
SIGN DETAIL SHEET**



DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

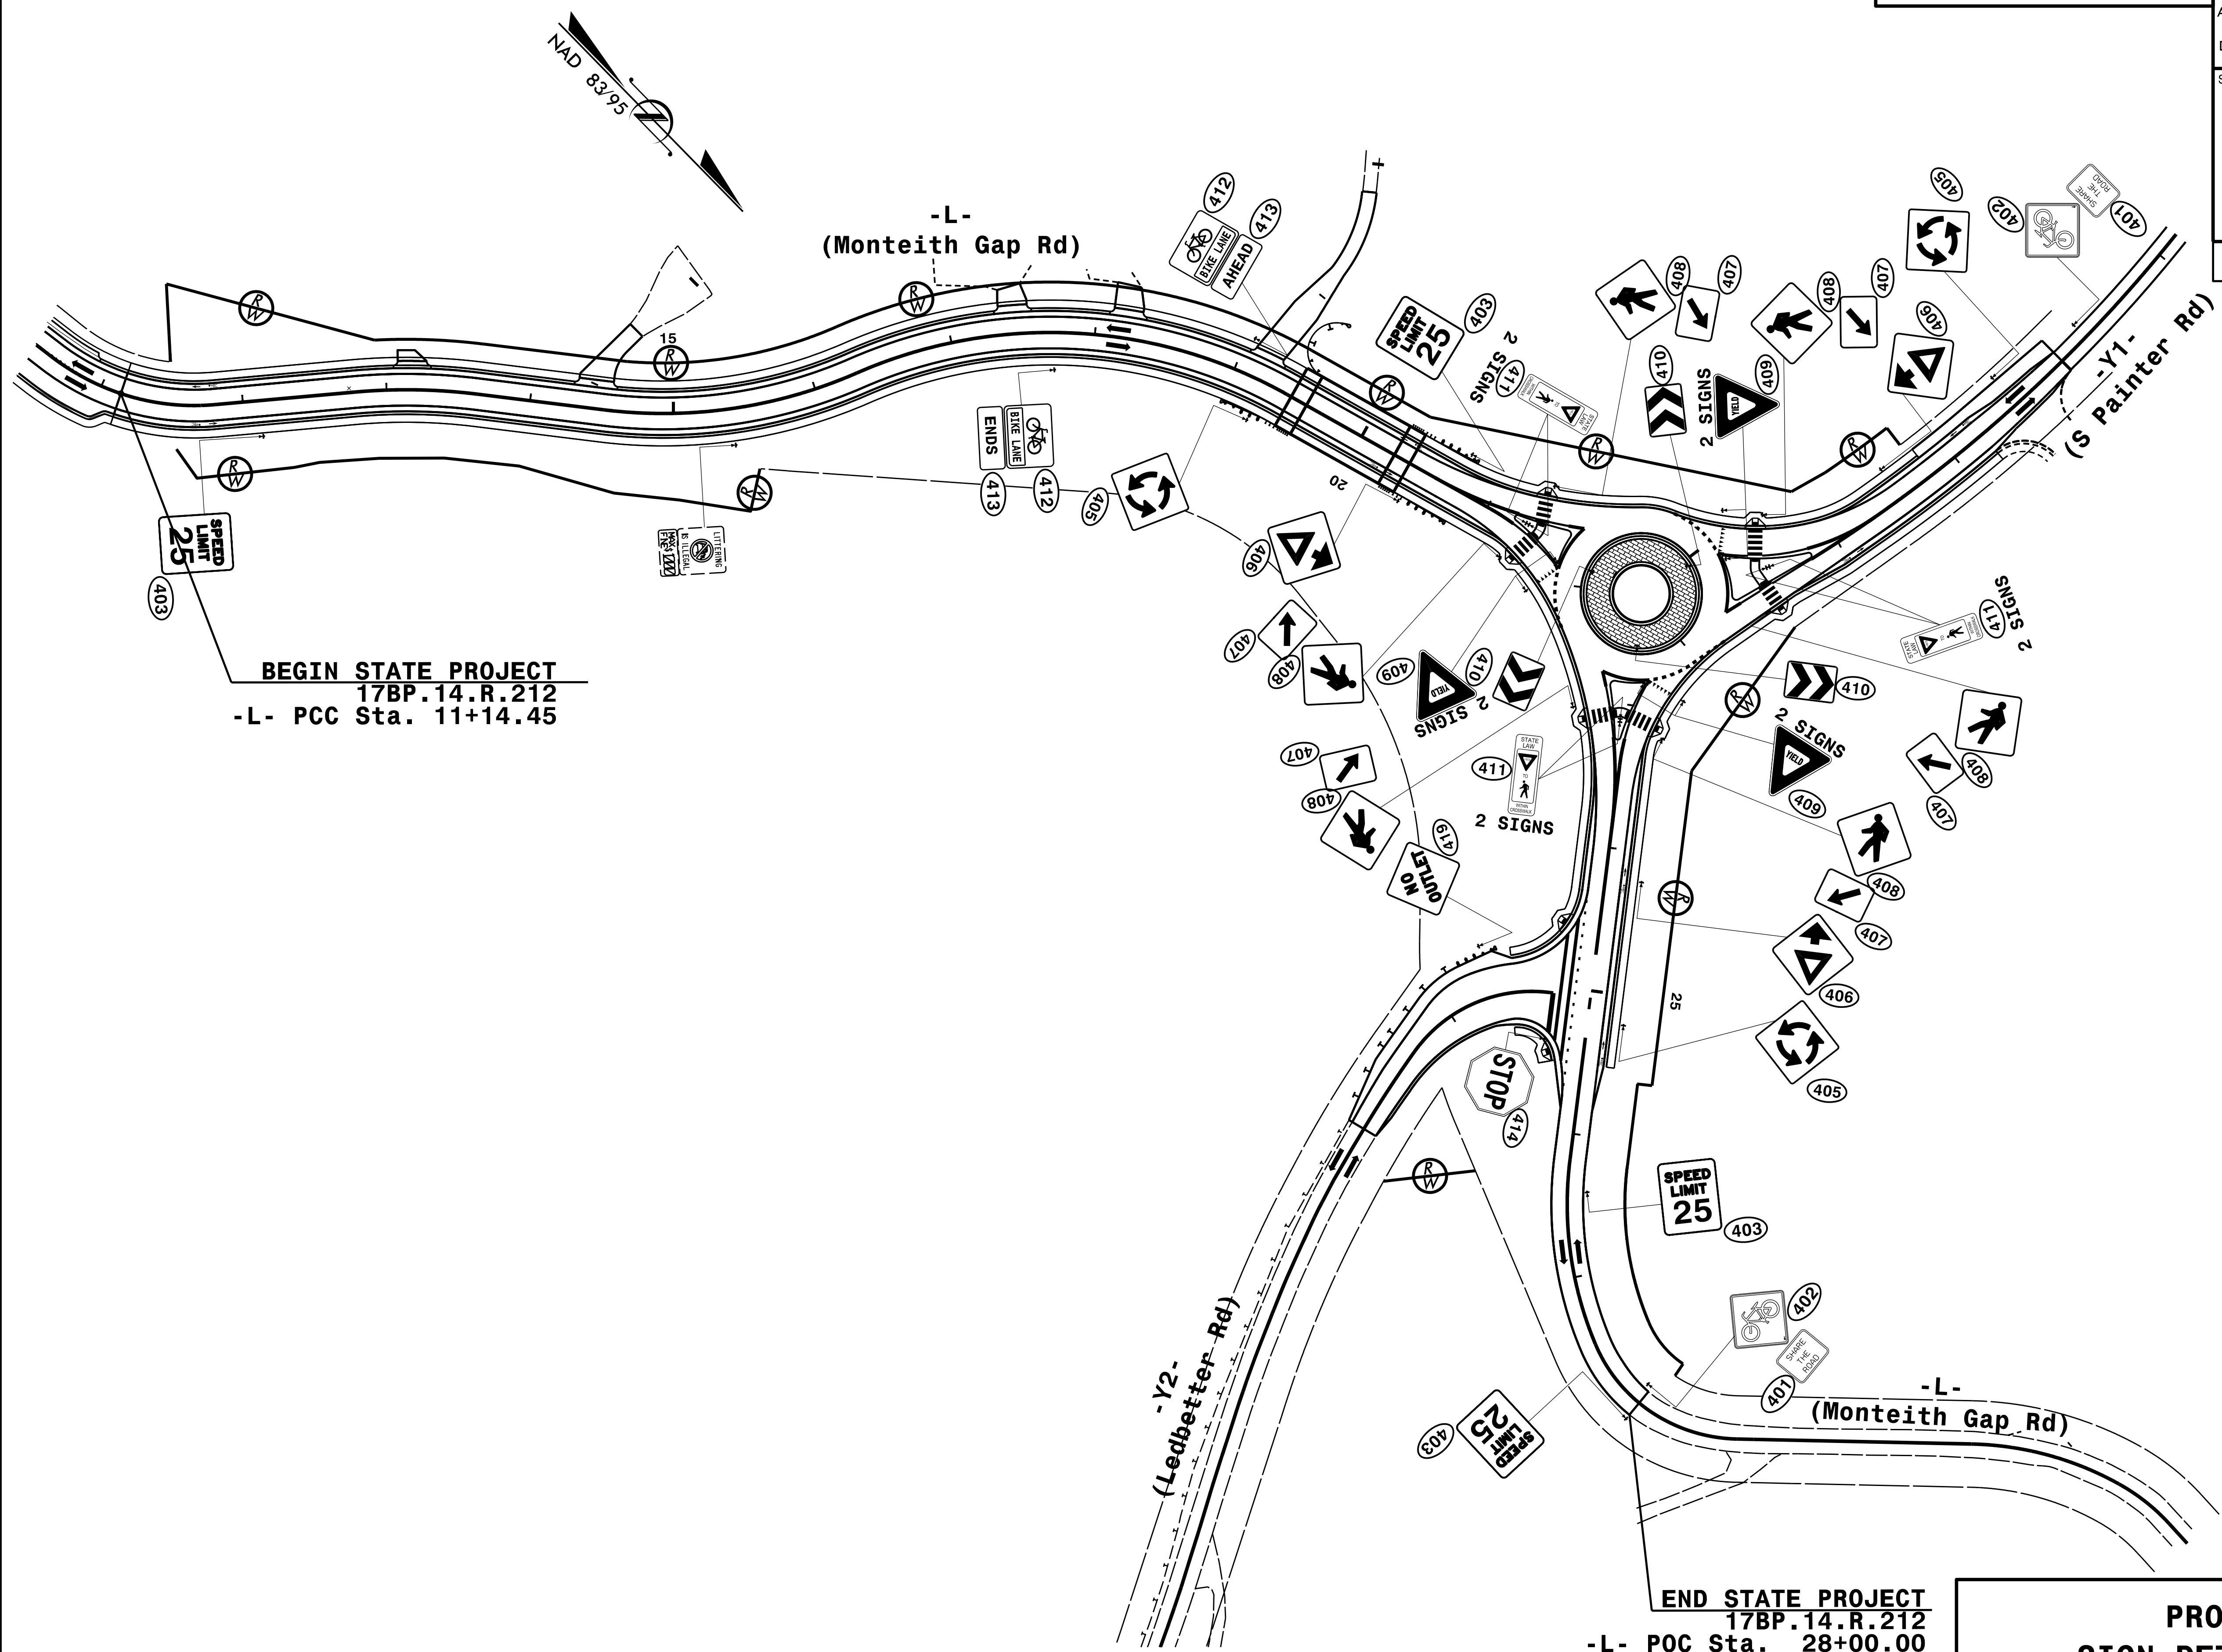

**BEGIN STATE PROJECT**  
17BP.14.R.212  
-L- PCC Sta. 11+14.45

**END STATE PROJECT**  
17BP.14.R.212  
-L- POC Sta. 28+00.00

**PROPOSED  
SIGN DETAIL SHEET**