
NOTES:

 APPROACH SLAB VOID FILLING ACTIVITIES TO BE COMPLETED PRIOR TO RESURFACING ACTIVITIES.

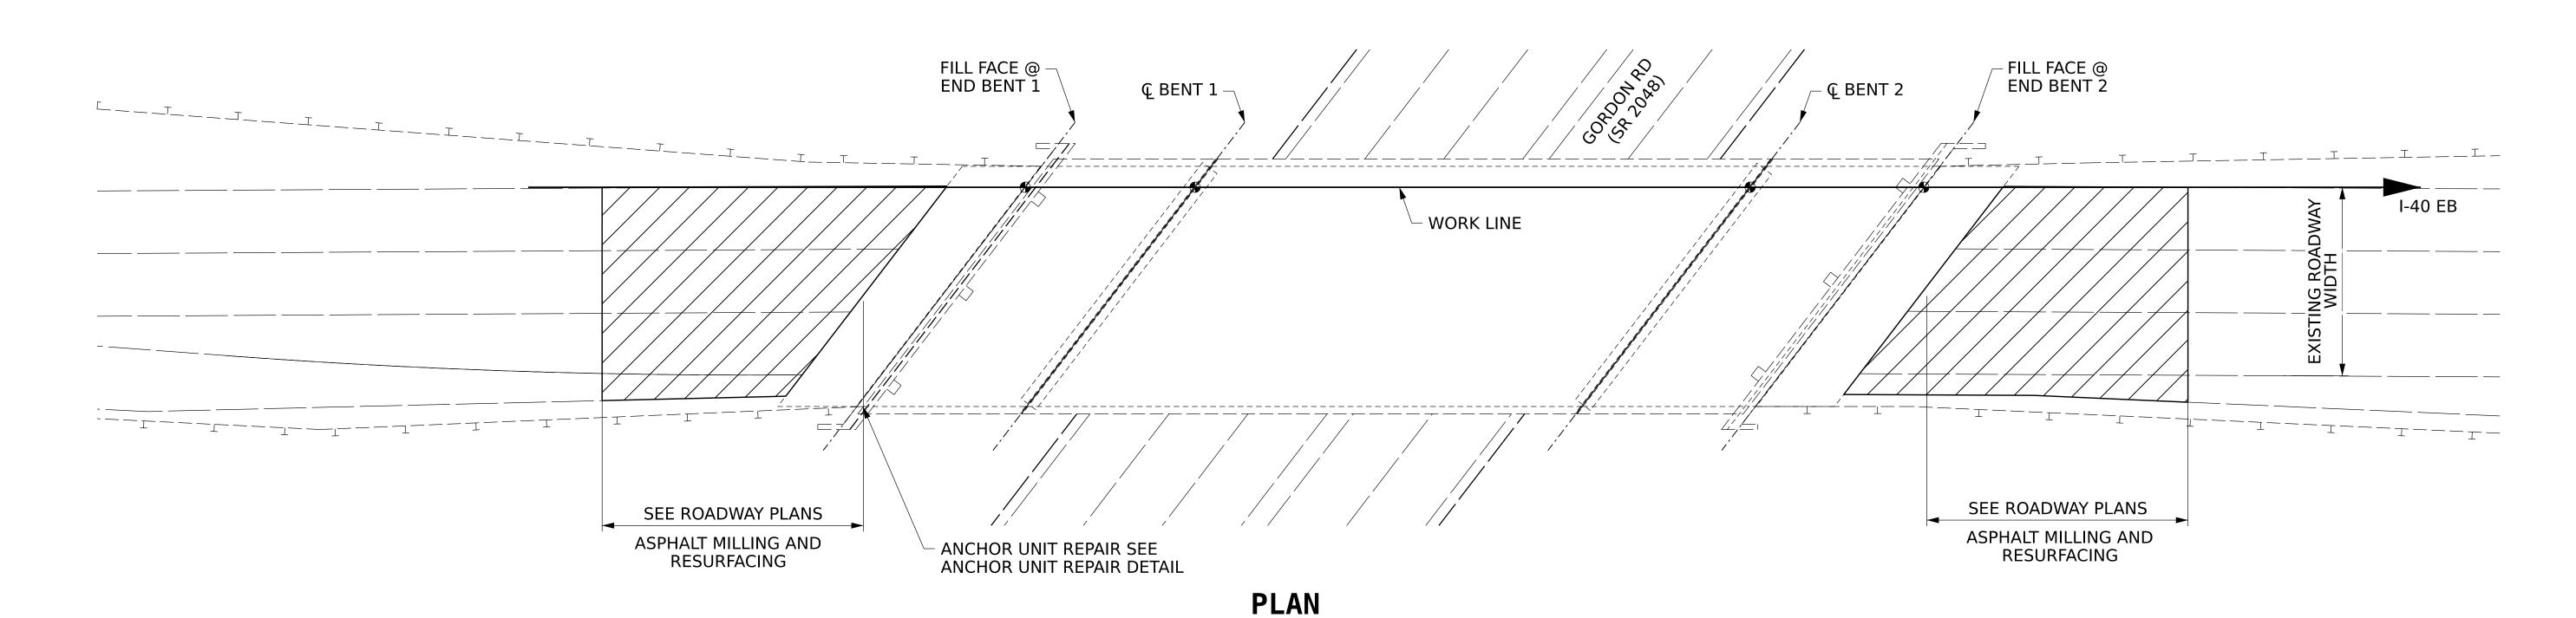

ANCHOR UNIT REPAIR DETAIL

TIGHTEN TOP AND MIDDLE CONNECTION SHOWN IN PHOTO.

REMOVE AND REPLACE, IN THE CORRECT ORIENTATION, ANY BOLTS WHOSE THREADED ENDS ARE EXPOSED ON THE TRAFFIC FACE OF THE GUARDRAIL ANCHOR ASSEMBLY.

REPLACE BOLTS AS NEEDED WITH AN ADHESIVELY ANCHORED BOLT. FOR ADHESIVELY ANCHORED BOLTS AND DOWELS, SEE SECTION 420-13 OF THE STANDARD SPECIFICATIONS.

PAYMENT FOR TIGHTENING OR REPLACEMENT SHALL BE INCIDENTAL TO THE VARIOUS PAY ITEMS FOR THIS PROJECT.

PROJECT NO.____

NEW HANOVER COUNTY

I-6039

BRIDGE NO. <u>640058</u>



DEPARTMENT OF TRANSPORTATION
RALEIGH

APPROACH ROADWAY
ASPHALT MILLING AND
GUARDRAIL

DRAWN BY: JASON M. DEBONE
CHECKED BY: ALLEN J. MCSWAIN
DESIGN ENGINEER OF RECORD: JACOB H. DUKE

DATE: 01/2023
DATE: 01/2023
DATE: 01/2023

4/17/2023 640058_I6039_SMU_AR01.dgn jduke