

\$\$\$\$\$SYTIME\$\$\$\$\$
 \$\$\$DDCN\$\$\$\$\$
 \$\$\$USERNAM\$\$\$\$\$

T.I.P.: B-5985A


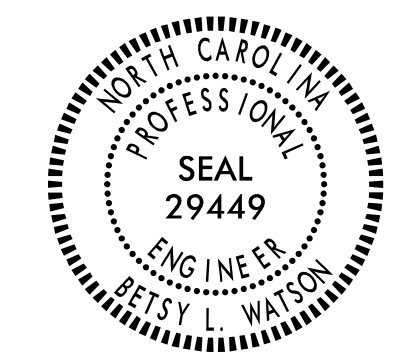

CONTRACT: C204764

**STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION**

SIGNING PLAN

ROBESON COUNTY

**LOCATION: BRIDGE NO. 770125 OVER LUMBER RIVER ON NC 41/72
 & BRIDGE NO. 770175 OVER LUMBER RIVER ON SR 1600**

TIP NO. B-5985A	SHEET NO. SIGN-1
APPROVED:  DATE: 2/2/2023	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
	

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

GENERAL NOTES

- SIGNS FURNISHED BY STATE
- CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

SUMMARY OF QUANTITIES

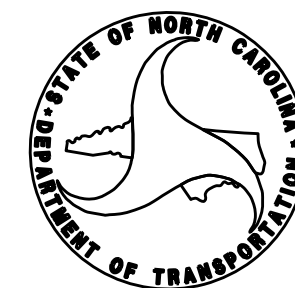
ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.		
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	317 L.F.
4096000000	904	SIGN ERECTION, TYPE D	2 EA.
4102000000	904	SIGN ERECTION, TYPE E	15 EA.
4108000000	904	SIGN ERECTION, TYPE F	1 EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED).....	2 EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE E (GROUND MOUNTED).....	3 EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	14 EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	3 EA.

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	E & F SHEETS & SIGN DESIGNS
SIGN-3 & 4	SIGNING PLAN SHEETS

PLAN SUBMITTED TO:

Ayman I. Alqudwah, P.E. Signing & Delineation Regional Engineer
Mitch Eaton, P.E. Signing & Delineation Project Design Engineer



Stantec Consulting Services Inc.
 801 Jones Franklin Road
 Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

PLAN PREPARED BY: Stantec Consulting Services, Inc.

Betsy L. Watson, PE Senior Principal
Regina Muncey, PE Transportation Engineer
James Hambright Senior Transportation Technician

