

ECONOLITE ASC/3-2070 PED 3 PROGRAMMING ASSIGNMENT DETAIL

(program controller as shown)

- 1. From Main Menu select **6. DETECTORS**
- 2. From DETECTOR Submenu select **3. PED DETECTOR INPUT ASSIGNMENT**

PED DET PHASE ASSIGNMENT MODE: NTCIP								
PHASE	1	2	3	4	5	6	7	8
DETECTOR	0	2	8	4	0	6	0	0
PHASE	9	10	11	12	13	14	15	16
DETECTOR	0	0	0	0	0	0	0	0

← NOTICE PED DETECTOR 8 ASSIGNED TO PHASE 3

- 1. From Main Menu select **1. CONFIGURATION**
- 2. From CONFIGURATION Submenu select **3. LOAD SW ASSIGN**

LD SWITCH ASSIGN									
PHASE	DIMMING	---FLASH---							
/OVLP	TYPE	R	Y	G	D	PWR	AUT	TGR	
1	1	V	.	.	.	+	A	R	X
2	2	V	.	.	.	+	A	Y	.
3	3	V	.	.	.	+	A	R	X
4	4	V	.	.	.	+	A	R	.
5	5	V	.	.	.	-	A	R	.
6	6	V	.	.	.	-	A	Y	X
7	7	V	.	.	.	-	A	R	.
8	8	V	.	.	.	-	A	R	X
9	1	O	.	.	.	+	A	R	X
10	2	O	.	.	.	+	A	R	X
11	3	O	.	.	.	-	A	R	.
12	4	O	.	.	.	-	A	R	.
13	2	P	.	.	.	+	A	.	.
14	4	P	.	.	.	-	A	.	.
15	6	P	.	.	.	+	A	.	.
16	3	P	.	.	.	-	A	.	.

→ NOTICE PHASE 3 PED ASSIGNED TO LD SWITCH 16

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0186T DESIGNED: AUGUST 2022 SEALED: FEBRUARY 2023 REVISED: N/A

Temporary Design Electrical Detail - Sheet 2 of 3


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared for the Offices of:



750 N. Greenfield Pkwy, Garner, NC 27529


NC 72/NC 41-72 (W 2nd St)
at
NC 41/SR 1599
(Martin Luther King Jr. Dr)
Division 6 Robeson County Lumberton

PLAN DATE: FEBRUARY 2023 REVIEWED BY: R M Muncey

PREPARED BY: D. Waller REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

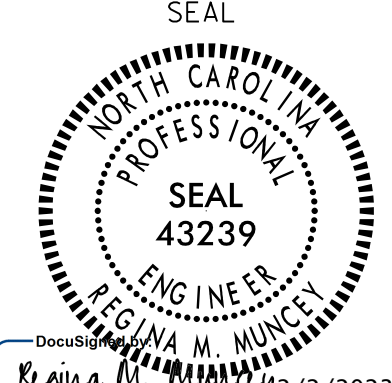

REGINA M. MUNCEY
ENGINEER
12/2/2023

SIGNATURE DATE

SIG. INVENTORY NO. 06-0186T

2:58:22 PM
U:\Traffic\cas\gma\is\Das\gn\electr\loc\Detail\temp\Temporary Design\MB-5985A\MB-5985A.sig_ele_06-0186T.dgn
User: rlmuncey