

NOTES


1. FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DIVISION TRAFFIC ENGINEER AT (336)903-9132. NOTIFY THE DIVISION TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL WIRELESS CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL ALL SIGNALS ARE COMMUNICATING WITH THE CENTRAL SYSTEM.
2. THE ANTENNAS SHALL BE INSTALLED ON THE MAST ARM.
3. THE EXISTING FIBER OPTIC CABLE ENTERING EXISTING CABINET 11-0944 SHALL BE BACK PULLED AND STORED AT THE NEAREST AVILABLE PULLBOX/SPLICE CENTER DURING THE NEW CABINET INSTALLATION. THE FIBER OPTIC CABLE SHALL BE REPULLED IN TO THE NEW CABINET AND ALL CONNECTIONS SHALL BE RESTORED TO ORIGINAL CONDITIONS. A CONNECTION SHALL BE MADE BETWEEN TRANSCEIVER AND NEW RADIO.



VHB Engineering NC, P.C. (C-3705)
 940 Main Campus Drive, Suite 500
 Raleigh, NC 27606
 919.629.0328

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

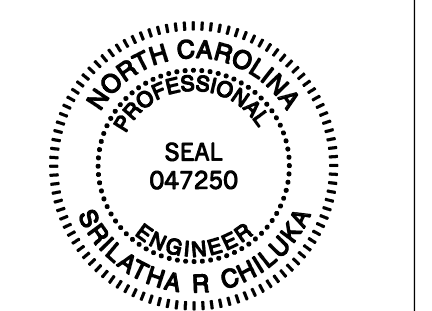

SIGNATURE: S.R. Chiluka DATE: 5/24/2023
 SIG. INVENTORY NO. 11-0944

Prepared For the Offices of:		Signal System Wilkesboro Wireless Communications Plan	
Division 11 Wilkes County Wilkesboro		PLAN DATE: May 2023	REVIEWED BY: J. Ma
750 N. Greenfield Pkwy, Garner, NC 27529		PREPARED BY: S.R. Chiluka	REVIEWED BY: M. Stygles
		REVISIONS	INIT. DATE

6/18/2019 4:16:28 PM \\vhb\gbi\proj\Raleigh\38621.03 NCDOT U-5312 Wilkes Co\NCDOT\Traffic\Signals\Design\Plans\U5312_SCP.dgn
 schiluka