

p:\gfn\p-w\benfley.com\gfn\p-w-01\Documents\Projects\67945\5-WorKing\Task\_010 - I-5955A Greensboro Rehab\Structures\CAD\2.0 100% Plans\400\_005.I-5955A\_SMU\_BM 2/28/2024 3:05:13 PM pdf\_color\_gfclt\_FS.plt I-5955A.tbl

TOTAL BILL OF MATERIAL

Table with 20 columns: BRIDGE NO., INCIDENTAL MILLING, ASPHALT CONC SURFACE COURSE, ASPHALT BINDER FOR PLANT MIX, 20" TUBULAR TRIPLE CORRUGATED STEEL BEAM GUARDRAIL, CLASS II SURFACE PREPARATION, CONCRETE REPAIRS, SHOTCRETE REPAIRS, EPOXY RESIN INJECTION, CLEANING AND PAINTING EXISTING WEATHERING STEEL FOR BRIDGE #\_\_, POLLUTION CONTROL, PAINTING CONTAINMENT FOR BRIDGE #\_\_, REMOVAL OF EXISTING 20" TUBULAR TRIPLE CORRUGATED STEEL BEAM GUARDRAIL, FOAM JOINT SEALS FOR PRESERVATION, EXPANSION JOINT SEAL REPAIR, ASPHALT PLUG JOINTS FOR PRESERVATION, POLYESTER POLYMER CONCRETE MATERIALS, EPOXY POLYMER CONCRETE MATERIALS (ALTERNATE), BEAM PLATING REPAIR, EPOXY COATING. Rows include individual bridge data and a TOTAL row.

TOTAL BILL OF MATERIAL

Table with 14 columns: BRIDGE NO., GROOVING BRIDGE FLOORS, CONCRETE DECK REPAIR FOR ASPHALT OVERLAY, CONCRETE WORK FOR JOINT REPLACEMENT, FINE MILLING, SHOTBLASTING BRIDGE DECK, SILANE DECK TREATMENT, CONCRETE DECK REPAIR FOR PC OVERLAY, PLACING & FINISHING PC OVERLAY, CLASS IB SURFACE PREPARATION, TYPE I BRIDGE JACKING BRIDGE NO. \_\_, REPOSITIONING SOLE PLATES, REPOSITIONING BEARING PADS, PORTABLE LIGHTING. Rows include individual bridge data and a TOTAL row.


NOTE:

AT THE TIME OF PREPARATION OF THESE PLANS, IT WAS NOT ANTICIPATED THAT THE ITEM(S) LISTED BELOW WOULD BE REQUIRED. HOWEVER, IT MAY BE DETERMINED IN THE FIELD THAT THE FOLLOWING ITEM(S) LISTED, OR OTHER WORK WILL BE NECESSARY TO PROPERLY COMPLETE THE INTENDED BRIDGE PRESERVATION/REHABILITATION WORK. THE CONTRACTOR SHALL BE PREPARED TO PERFORM SUCH WORK IN A TIMELY MANNER, AS DETERMINED IN THE FIELD. SUCH WORK SHALL BE CONSIDERED EXTRA WORK AND SHALL BE ADDRESSED AS PER ARTICLE 104-7 OF THE STANDARD SPECIFICATIONS. PROJECT SPECIAL PROVISIONS THAT OUTLINE REQUIREMENTS FOR THESE POTENTIAL ADDITIONAL WORK ITEMS HAVE BEEN PROVIDED IN THE PROJECT DOCUMENTS, BUT NO QUANTITIES HAVE BEEN LISTED. ACTUAL PAY ITEMS, QUANTITIES, AND COSTS WILL BE ESTABLISHED, AS REQUIRED, IF EXTRA WORK IS ENCOUNTERED.

UNANTICIPATED ITEMS: CLASS III SURFACE PREPARATION VOLUMETRIC MIXER TYPE II BRIDGE JACKING BRIDGE NO. \_\_

PROJECT NO. I-5955A  
GUILFORD COUNTY

BRIDGE NO. 400285, 400291, 400299, 400327, 400329, 400336, 400339, 400340, 400348, 400349, 400357, 400364, 400367 & 400678

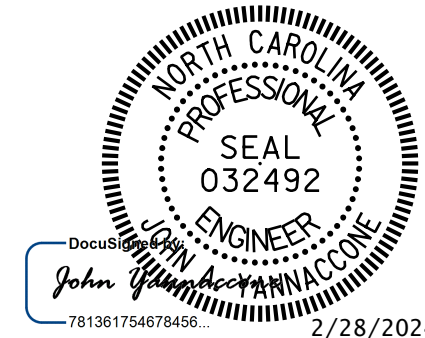

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
TOTAL BILL OF MATERIAL

DRAWN BY: J. MYA DATE: 10/2022  
CHECKED BY: J. YANACCONE DATE: 10/2022



DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Table with 2 columns: REVISIONS (NO., BY, DATE) and SHEET NO. (S-1, TOTAL SHEETS 127)