

CONTRACT: C204878 T.I.P.: I-25I3AA/AB

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

SIGNING PLAN BUNCOMBE COUNTY

LOCATION: I-40 FROM EAST OF SR 1224 (MONTE VISTA RD) TO WEST OF SR 3412 (SAND HILL RD) AND I-40 AT I-26 AND US 19/23 INTERCHANGES

PROJECT REFERENCE NO. I-25I3AA/AB SHEET NO. SIGN-1 APPROVED: Andrew Klinksiek DATE: 2/1/2024 SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 403# ANDREW D. KLINSIEK DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - CONTRACT STANDARDS AND DEVELOPMENT UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

Table with 2 columns: STD. NO. and TITLE. Lists various roadway standards such as TYPE 'A' SIGNS, ARROWS AND SHIELDS, RIVET SPACING FOR OVERLAYED SIGNS, etc.

PAY ITEM NOTES

- 1 SIGN ERECTION, TYPE D, E OR F
2 SIGN ERECTION, TYPE A (OVERHEAD)
3 SIGN ERECTION, TYPE B (OVERHEAD)
4 SIGN ERECTION, TYPE A (GROUND MOUNTED)
5 SIGN ERECTION, TYPE B (GROUND MOUNTED)
6 SIGN ERECTION, MILEMARKERS
7 SIGN ERECTION, RELOCATE SIGN TYPE A (GROUND MOUNTED)
8 SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED)
9 NOT USED
10 DISPOSAL OF SUPPORT, STEEL BEAM
11 DISPOSAL OF SIGN SYSTEM, STEEL BEAM
12 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
13 SIGN ERECTION, OVERLAY (GROUND MOUNTED)
14 DISPOSAL OF SUPPORT, U-CHANNEL
15 DISPOSAL OF SIGN, A OR B (OVERHEAD)
16 DISPOSAL OF SIGN SYSTEM, OVERHEAD
17 SIGN ERECTION, LOGO MILEAGE PANEL TO SIGN
18 SIGN ERECTION, RELOCATE, LOGO BUSINESS PANEL
19 SUPPORT, BARRIER (LARGE)

PROJECT NOTES

- A PAY ITEM NOTE 18 ON THIS PROJECT MAY REFER TO RELOCATION OF LOGO PANELS, WHICH INCLUDES DETACHING THE PANELS FROM EXISTING SIGNS AS WELL AS ERECTING THEM ON NEW SIGNS. DO NOT RELOCATE MILEAGE PANELS.
B PROPOSED LOGO MILEAGE PANELS TO BE PROVIDED BY DIVISION.


GENERAL NOTES

- . SIGNS FURNISHED BY STATE.
. ALL PROPOSED SIGNS SEE PAY ITEM NOTE 1 UNLESS OTHERWISE NOTED.
. CONFIRM IN WRITING AT LEAST 6 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
. ALL TYPE D SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
. IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
. WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL TYPE E AND F SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
. ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
. WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
. THE BACKGROUND FOR TYPE E AND F SIGNS SHALL BE GRADE C REFLECTIVE SHEETING UNLESS OTHERWISE.
. DO NOT BEGIN FABRICATION FOR TYPE A AND B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL "S" DIMENSIONS HAVE BEEN FIELD VERIFIED.
. SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

INDEX

Table with 2 columns: SHEET NO. and DESCRIPTION. Lists sheet numbers and their corresponding descriptions like TITLE SHEET, SUMMARY OF QUANTITIES, KEY SHEET, etc.

PLANS SUBMITTED TO: KELVIN L. JORDAN SIGNING & DELINEATION REGIONAL ENGINEER ERIC WARD SIGNING & DELINEATION PROJECT DESIGN ENGINEER

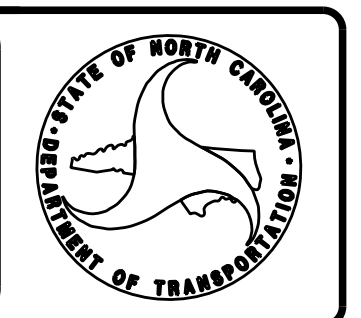

PLANS PREPARED BY: HNTB NORTH CAROLINA, P.C. A.D. KLINSIEK, PE, PTOE SIGNING PROJECT MANAGER NICOLE VLANICH, PE SIGNING PROJECT ENGINEER T.R. TERRELL SIGNING DESIGN SENIOR TECHNICIAN

HNTB logo and contact information: HNTB NORTH CAROLINA, P.C. 343 E. Six Forks Road, Suite 200 Raleigh, North Carolina 27609 NC License No: C-1554 (919)546-8997