
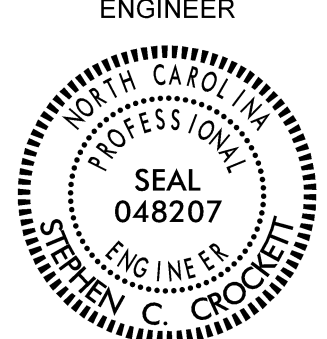



GEOTECHNICAL ENGINEER  SEAL 048207 ENGINEER STEPHEN C. CROCKETT	ENGINEER SIGNATURE: _____ DATE: _____ SIGNATURE: _____ DATE: _____
DocuSigned by: Stephen Crockett 5/14/2024 CCASPFED4RE435	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

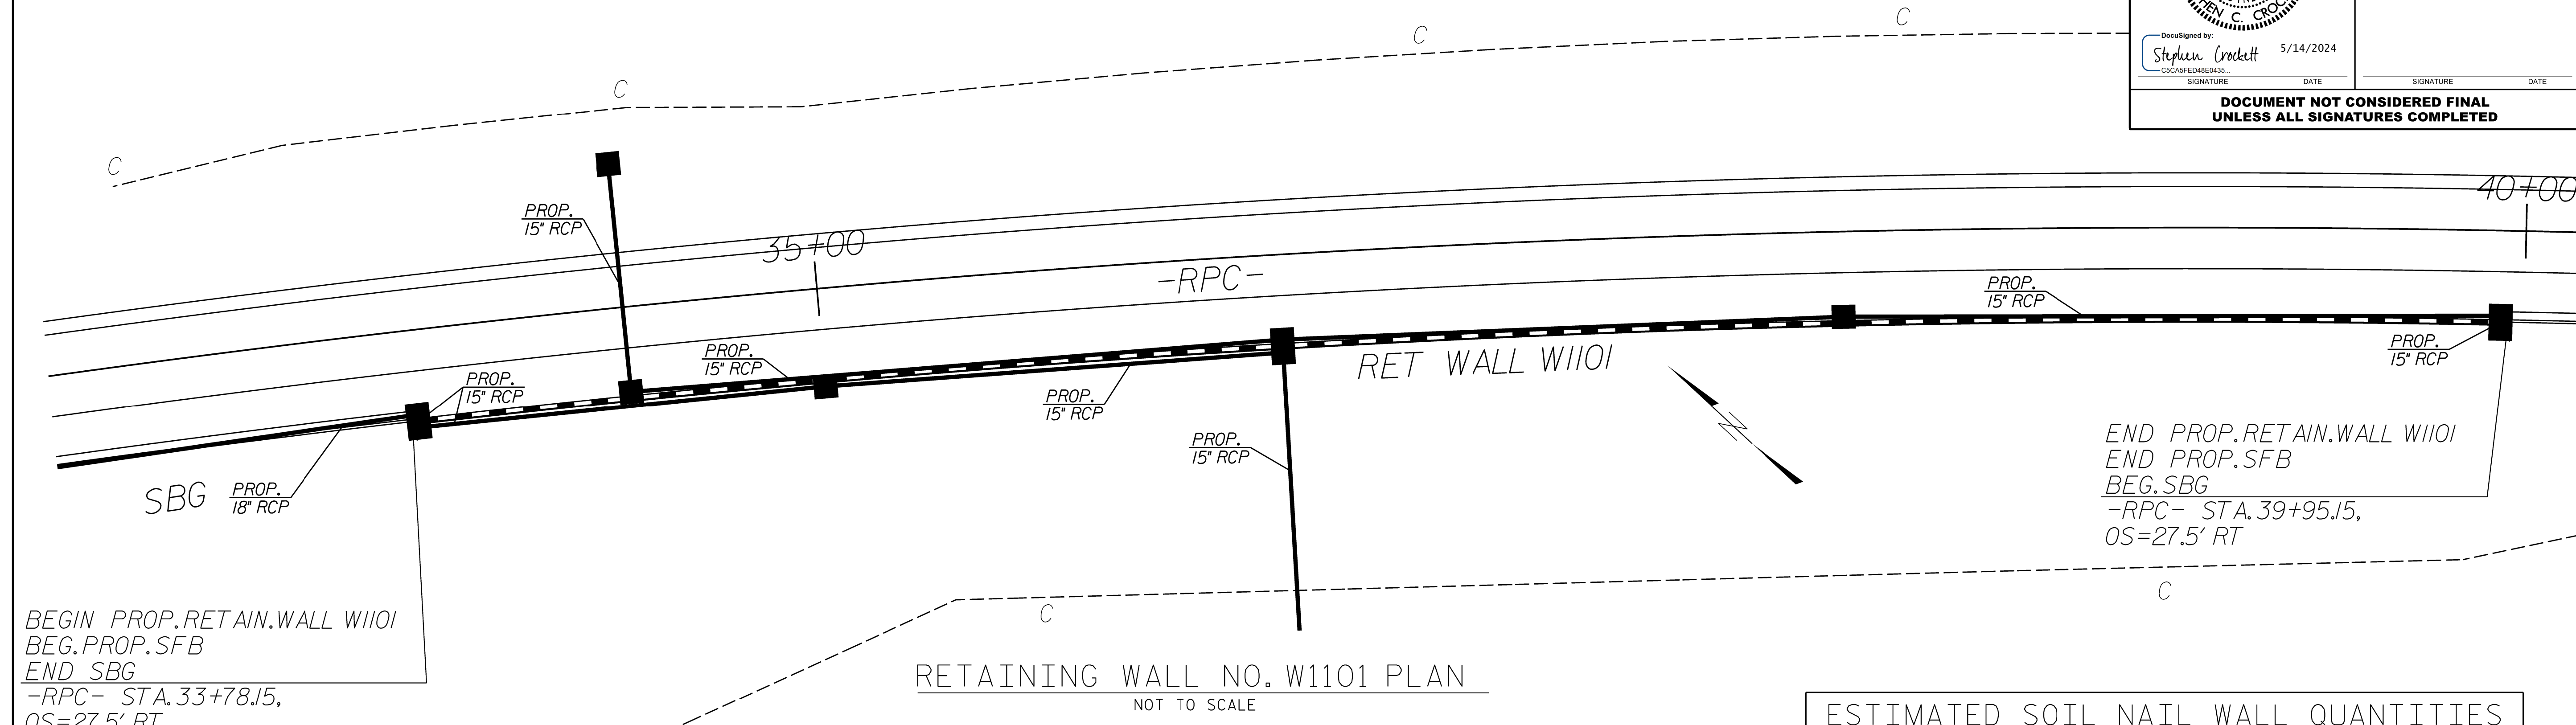

BEGIN PROP. RETAIN. WALL W1101
 BEG. PROP. SFB
 END SBG
 -RPC- STA. 33+78.15,
 OS=27.5' RT

RETAINING WALL NO. W1101 PLAN
 NOT TO SCALE

ESTIMATED SOIL NAIL WALL QUANTITIES			
RETAINING WALL NO.	SOIL NAIL RETAINING WALLS (SQ. FEET)	SOIL NAIL VERIFICATION TESTS	SOIL NAIL PROOF TESTS
W1101	6,925	2	14
PAY ITEM			QUANTITY
ARCHITECTURAL CONCRETE SURFACE TREATMENT			6,925 SQ FT

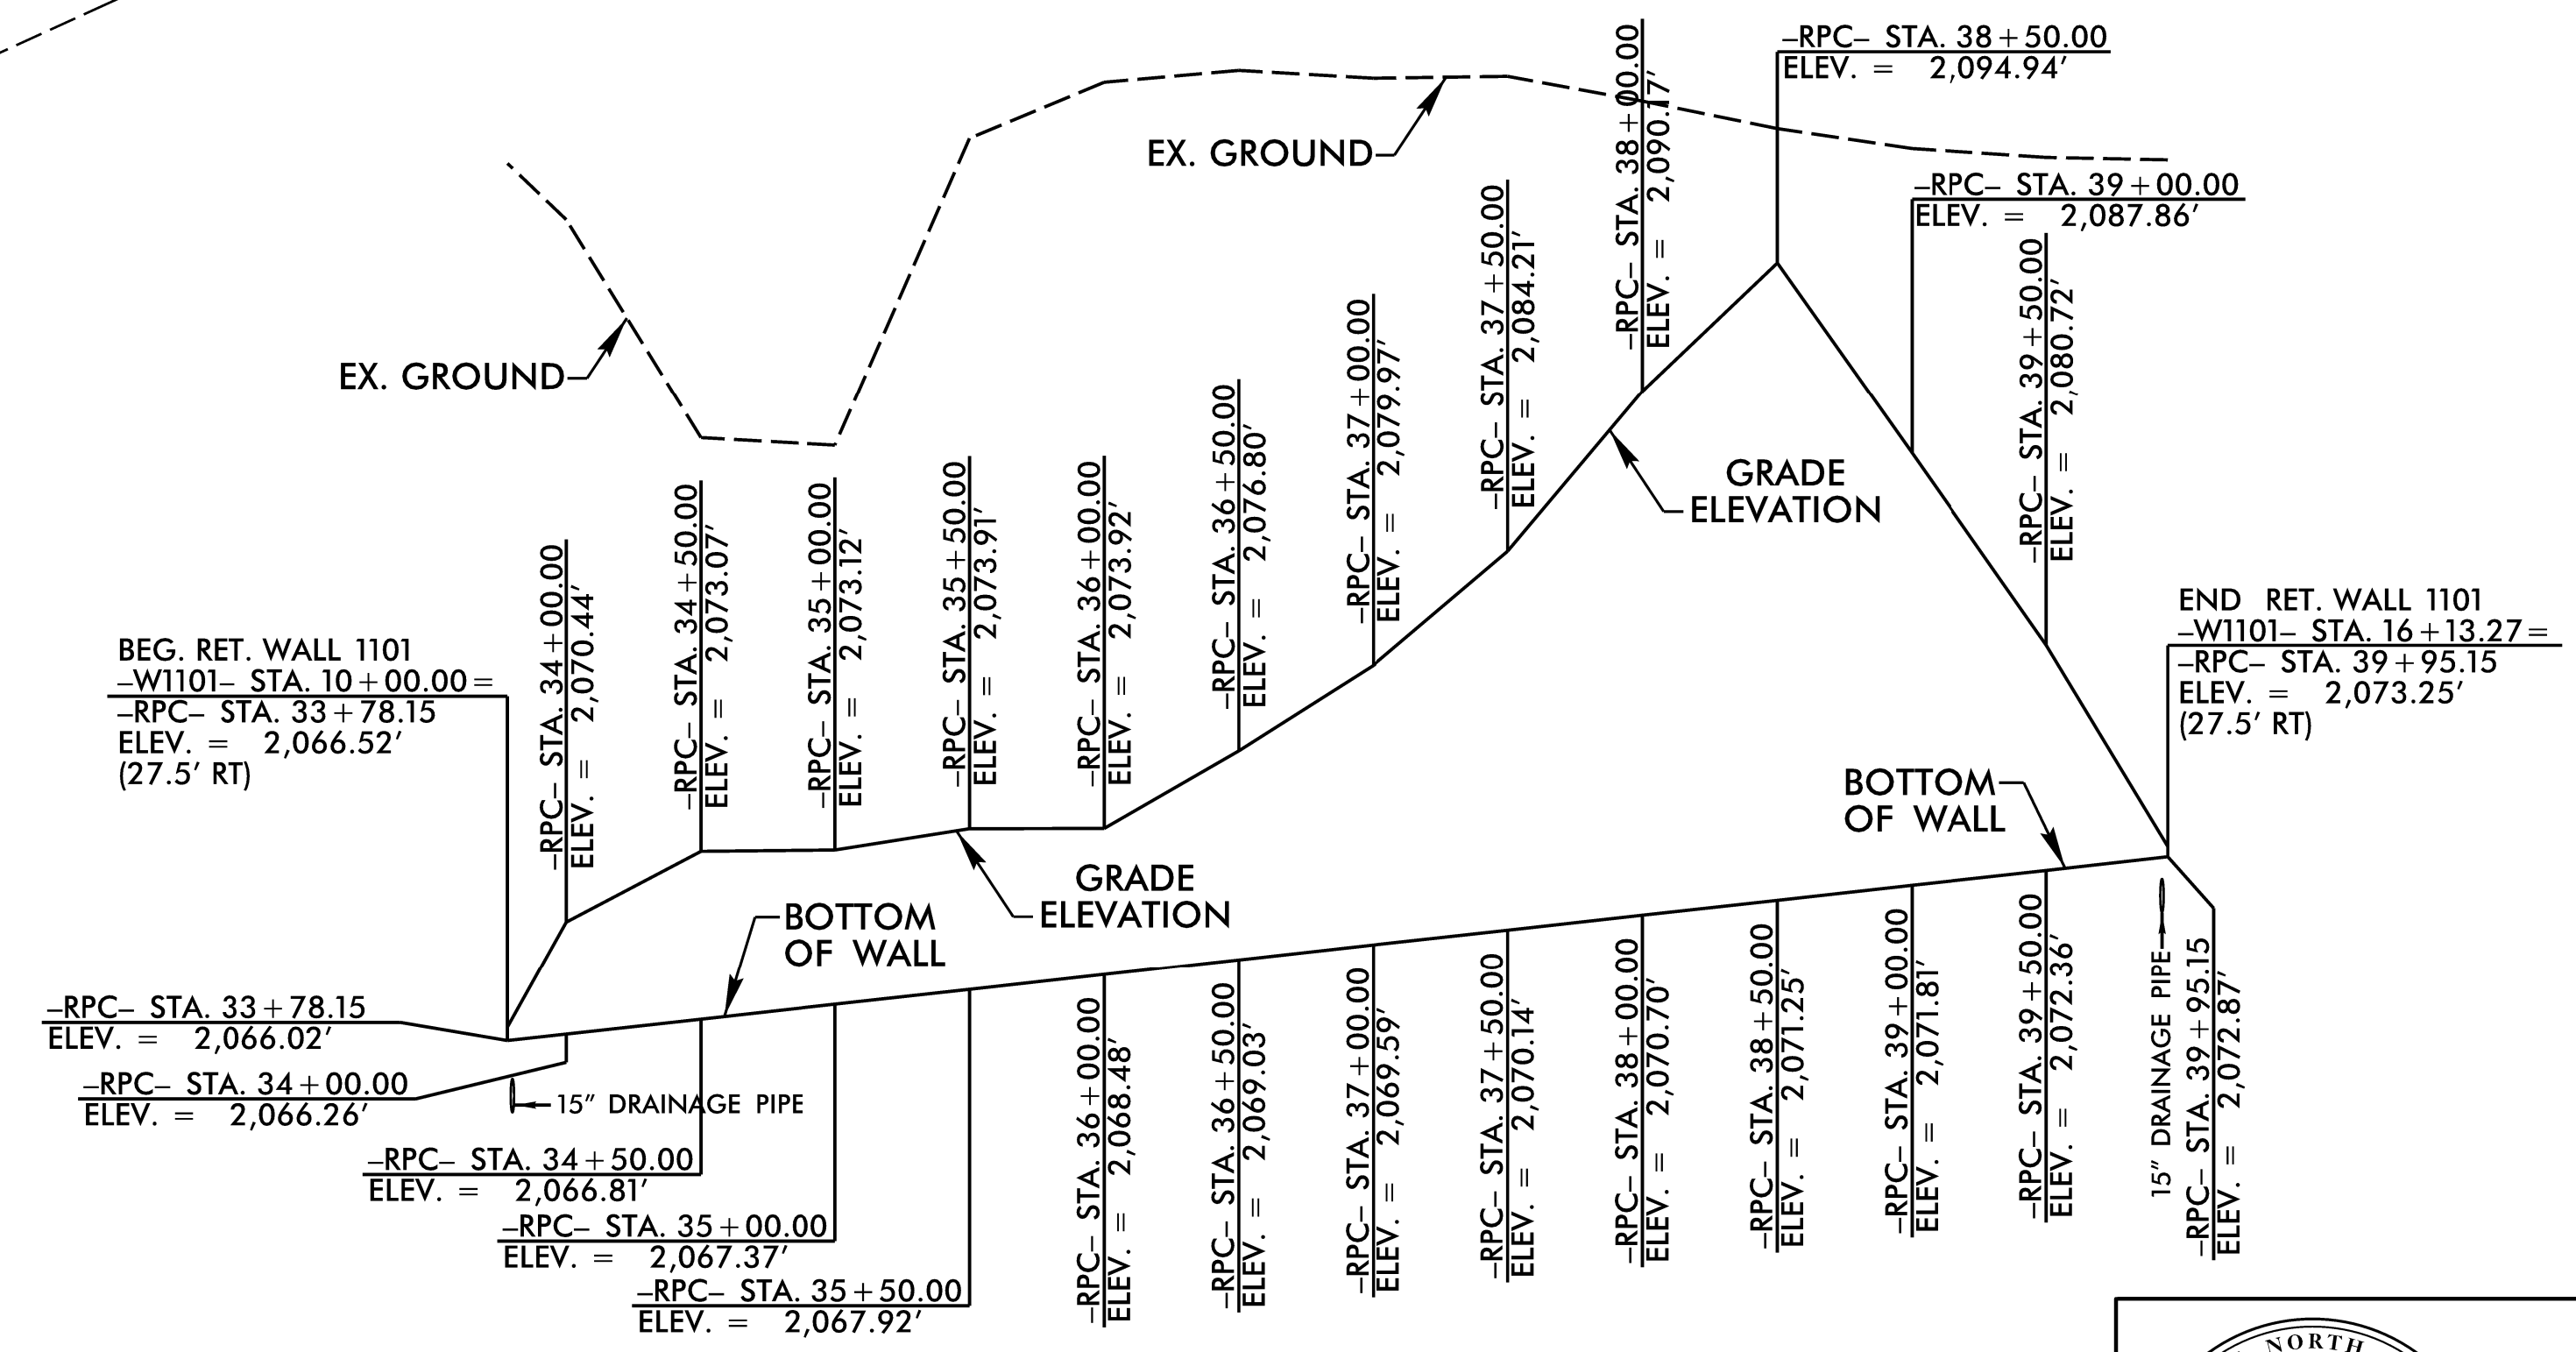


BEG. RET. WALL 1101
 -W1101- STA. 10+00.00=
 -RPC- STA. 33+78.15
 ELEV. = 2,066.52'
 (27.5' RT)

END RET. WALL 1101
 -W1101- STA. 16+13.27=
 -RPC- STA. 39+95.15
 ELEV. = 2,073.25'
 (27.5' RT)

RETAINING WALL NO. W1101 ENVELOPE
 DIMENSIONS OF WALL TAKEN ALONG FRONT FACE OF MSE WALL
 NOT TO SCALE

PROJECT NO.: I-2513AA/AB
 BUNCOMBE COUNTY
 STATION: -RPC- 33+78.15 TO 39+95.15
 SHEET 8 OF 11 WALL ID W1101

PREPARED BY: S. CROCKETT DATE: 9/5/23
 REVIEWED BY: J. HAMM DATE: 9/7/23

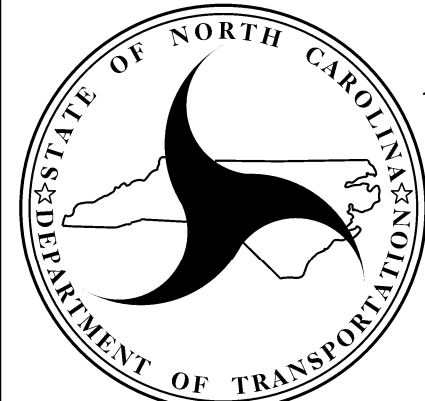
**NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS**

**GEOTECHNICAL
 ENGINEERING UNIT**

REVISIONS						SHEET NO. W-8
NO.	BY	DATE	NO.	BY	DATE	
1			3			
2			4			