
PROJECT NO.	SHEET NO.
2024CPT.13.14.20811	11

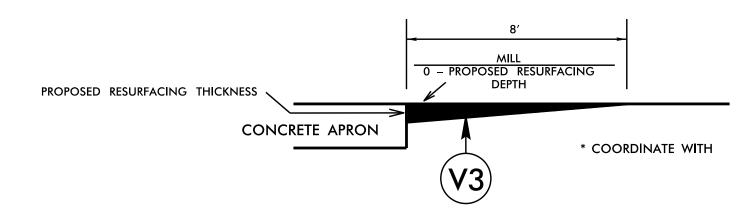

TO RESURFACING BEGINS.

MILLING DETAIL AT CONCRETE APRON

TIE-IN AT CLIFFSIDE FIRE DEPARTMENT.
THIS WILL BE PAID AS INCIDENTAL MILLING.
USE ON MAP 26
LOCATED AT 4600 US 221A HIGHWAY, MOORESBORO, NC 28114

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.50 LBS. PER SQ. YARD
T1	SHOULDER RECONSTRUCTION
V1	MILLING ASPHALT PAVEMENT, 0 TO 1-1/2" DEPTH
V2	MILLING ASPHALT PAVEMENT 1-1/2" DEPTH
V 3	INCIDENTAL MILLING