

SUMMARY OF PILE INFORMATION/INSTALLATION

(Blank entries indicate item is not applicable to structure)

End Bent/ Bent No, Pile(s) #(-#) (e.g., "Bent 1, Piles 1-5")	Factored Resistance per Pile TONS	Pile Cut-Off (Top of Pile) Elevation FT	Estimated Pile Length per Pile FT	Scour Critical Elevation FT	Driven Piles			Predrilling for Piles*			Drilled-In Piles		
					Min Pile Tip (Tip No Higher Than) Elev FT	Required Driving Resistance (RDR)** per Pile TONS	Total Pile Redrives Quantity EACH	Predrilling Length per Pile Lin FT	Predrilling Elevation (Elev Not To Predrill Below) FT	Maximum Predrilling Dia INCHES	Pile Excavation (Bottom of Hole) Elev FT	Pile Exc Not In Soil per Pile Lin FT	Pile Exc In Soil per Pile Lin FT
End Bent No. 1, Piles 1-3	115	See Structure Drawings	85			300							
End Bent No. 1, Piles 4-15	115		60			300							
End Bent No. 2, Piles 1-3	115		85			300							
End Bent No. 2, Piles 4-15	115		60			300							

*Predrilling for Piles is required for end bents/bents with a predrilling length and at the Contractor's option for end bents/bents with predrilling information but no predrilling length.

$$**RDR = \frac{\text{Factored Resistance} + \text{Factored Downdrag Load} + \text{Factored Dead Load}}{\text{Dynamic Resistance Factor}} + \frac{\text{Nominal Downdrag Resistance} + \text{Nominal Scour Resistance}}{\text{Scour Resistance Factor}}$$

PILE DESIGN INFORMATION

(Blank entries indicate item is not applicable to structure)

End Bent/ Bent No, Pile(s) #(-#) (e.g., "Bent 1, Piles 1-5")	Factored Axial Load per Pile TONS	Factored Downdrag Load per Pile TONS	Factored Dead Load* per Pile TONS	Dynamic Resistance Factor	Nominal Downdrag Resistance per Pile TONS	Nominal Scour Resistance per Pile TONS	Scour Resistance Factor (Default = 1.00)
End Bent No. 1, Piles 1-15	113	44		0.60	35		
End Bent No. 2, Piles 1-15	113	44		0.60	35		

*Factored Dead Load is factored weight of pile above the ground line.

SUMMARY OF PDA

(Blank entries indicate item is not applicable to structure)

End Bent/ Bent No, Pile(s) #(-#) (e.g., "Bent 1, Piles 1-5")	PDA Testing Required? YES or MAYBE	Total PDA Testing Quantity EACH

SUMMARY OF PILE ACCESSORIES

(Blank entries indicate item is not applicable to structure)

End Bent/ Bent No, Pile(s) #(-#) (e.g., "Bent 1, Piles 1-5")	Pipe Pile Plates Required? YES or MAYBE	Steel Pile Points			Steel Pile Tips Required? YES
		Pipe Pile Cutting Shoes Required? YES	Pipe Pile Conical Points Required? YES	H-Pile Points Required? YES	
TOTAL QTY:					

NOTES

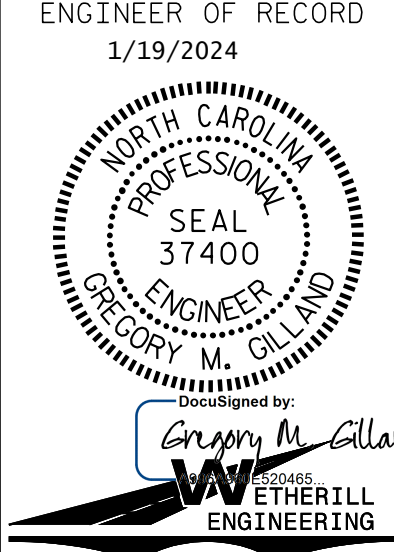
- The Pile and Drilled Pier Foundation Tables are based on the bridge substructure design and foundation recommendations sealed by a North Carolina Professional Engineer Michael H. Stephens (PE No. 028893) on 09/14/2023.
- Total Pile Driving Equipment Setup quantity (not shown in Pile Foundation Tables) equals the number of driven piles, i.e., the number of piles with a Required Driving Resistance.
- The Engineer will determine the need for PDA Testing, Pipe Pile Plates, Permanent Steel Casing, SPTs, CSL Testing, SID Inspections and PITs when these items may be required.

PROJECT NO. HB-0004
HAYWOOD COUNTY
 STATION: 254+73.75 -L-

SHEET 3 OF 5

DRAWN BY : D. HODGE DATE : 11/23
 CHECKED BY : G. GILLAND DATE : 11/23

DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED

 ENGINEER OF RECORD 1/19/2024 1223 Jones Franklin Rd. Raleigh, N.C. 27606 Bus: 919 851 8077 Fax: 919 851 8107 LICENSE NO. F-0377	STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH GENERAL DRAWING PILE FOUNDATION TABLES (LEFT LANE)				SHEET NO. S1-03 TOTAL SHEETS 58	
	REVISIONS					
	NO.	BY:	DATE:	NO.	BY:	DATE:
	1			3		
	2			4		

P:\2023\2312401_HB-0004\Structures\DWG\HB-0004 (LEFT LANE)\HB0004-LEFT-GD.dgn
 1/18/2024 4:29:53 PM