


MATCHLINE D - SEE SHEET SCP. 5

MATCHLINE E SEE SHEET SCP. 7

- NOTES:
- UNLESS OTHERWISE NOTED:
 -ATTACH NEW MESSENGER CABLE MINIMUM 40 INCHES BELOW POWER.
 -ATTACH ON FRONT SIDE (FS) OF POLE.
 - MAINTAIN A MINIMUM OF SIX (6) FEET FROM THE EDGE OF PAVEMENT WHEN TRENCHING PARALLEL TO THE ROADWAY.
 - TWO (2) WEEKS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DEPUTY DIVISION TRAFFIC ENGINEER AT (910) 947-3930 TO ARRANGE FOR THE DIVISION TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION.
 - NOTIFY THE DEPUTY DIVISION TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND FUNCTIONAL.

Final Design DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

HNTB
 HNTB NORTH CAROLINA, P.C.
 343 E. Six Forks Road, Suite 200
 Raleigh, North Carolina 27609
 NC License No: C-1554
 (919) 546-8997

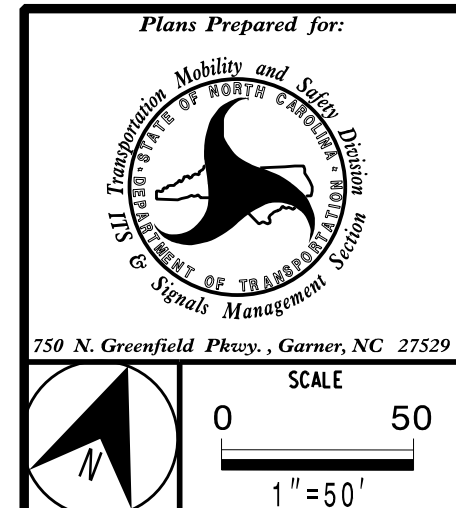

Division 8 Randolph County Asheboro	
PLAN DATE: Sept 2021	REVIEWED BY: J.A. Wagner
PREPARED BY: T.R. Terrell	REVIEWED BY: N.R. Simmons
REVISIONS	INIT. DATE

DocuSigned by:
Natasha R. Simmons 5/21/2024
 SIGNATURE DATE
 CADD Filename: U5813 SCP-06.dgn

