

MAXTIME STARTUP AND SOFTWARE FLASH PROGRAMMING DETAIL

Front Panel
Main Menu >Controller >Unit

Web Interface
Home >Controller >Unit

Modify parameters as shown below and save changes.

Startup Parameters	Unit Flash Parameters
Startup Clearance Hold	All Red Flash Exit Time
6	6

OUTPUT CHANNEL CONFIGURATION

Front Panel
Main Menu >Controller >More>Channels>Channels Config

Web Interface
Home >Controller >Advanced IO>Channels>Channels Configuration

Channel Configuration

NOTICE PHASE 2
FLASH RED →

NOTICE PHASE 6
FLASH RED →

NOTICE OVERLAP 1
FLASH RED →

NOTICE OVERLAP 3
FLASH RED →

Channel	Control Type	Control Source	Flash Yellow	Flash Red	Flash Alt	MMU Channel
1	Phase Vehicle	1		X	X	1
2	Phase Vehicle	2		X		2
3	Phase Vehicle	3		X	X	3
4	Phase Vehicle	4		X		4
5	Phase Vehicle	5		X		5
6	Phase Vehicle	6		X	X	6
7	Phase Vehicle	7		X		7
8	Phase Vehicle	8		X	X	8
9	Overlap	1		X	X	9
10	Overlap	2		X	X	10
11	Overlap	3		X		11
12	Overlap	4		X		12
13	Phase Ped	2				13
14	Phase Ped	4				14
15	Phase Ped	6				15
16	Phase Ped	8				16
17	Overlap	5		X	X	17
18	Overlap	6		X		18

Electrical Detail - Sheet 3 of 3
Temporary Design 1 (TMP Phase I)

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 08-0098T1
DESIGNED: June 2024
SEALED: 7/11/2024
REVISED:


M M

**MOTT
MACDONALD**

MOTT MACDONALD I & E, LLC
930 Main Campus Drive
Suite 200
RALEIGH, NC 27606
License No. F-0669

ELECTRICAL AND PROGRAMMING
DETAILS FOR:


Prepared for:



750 N. Greenfield Pkwy, Corner, NC 27529

NC 73-211/NC 211 at NC 73/SR 1133 (Mode Rd)	
Division 8 Moore County West End	
PLAN DATE: June 2024	REVIEWED BY: R. Mullinax
PREPARED BY: LD Stouchko	REVIEWED BY:
REVISIONS	INIT. DATE

SEAL

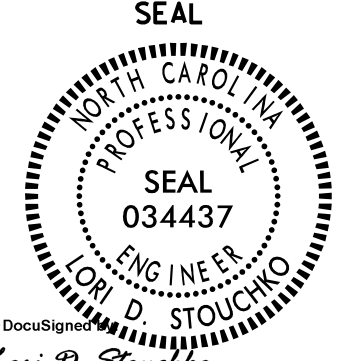

Lori D. Stouchko

SIGNATURE DATE

SIG. INVENTORY NO. 08-0098T1