


W/EXISTING CENTERLINE ALIGNMENTS PRIOR TO CONSTRUCTION

AND SURVEYS UNIT.

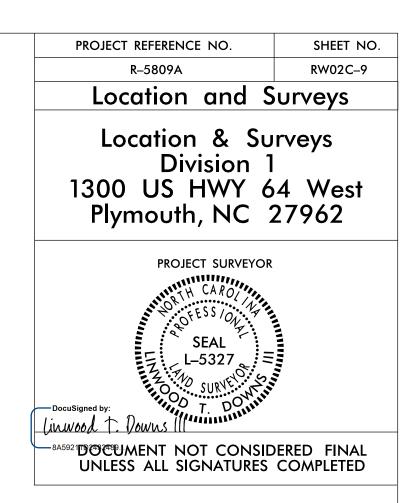

I, Linwood T. Downs III, PLS, certify that the Project Control was performed under my supervision from an actual GPS survey made under my supervision and the following information was used to perform the survey:

Class of survey: AA Type of GPS field procedure: RTN Dates of survey: May 2021 Datum/Epoch: NAD 83/NA 2011 Published/Fixed-control use: N/A Localized around: Centroid1 Northing: 814,558.4117 Easting: 2,664,159.1394 Combined grid factor: 0.999954899 Geoid model: GEIOD 12B Units:US Survey Foot

I also certify that the Baseline Control for this project was completed under my direct and responsible charge from an actual survey made under my supervision; that all horizontal closures had a minimum ratio of precision of 1:20,000 (Class AA) and Vertical accuracy to Class A. Field work was performed from May 3, 2023 to May 31, 2023, and all coordinates are based on NAD 83/2011 and all elevations are based on NAVD 88; that this survey was performed to meet the requirements of 21NCAC 56.1600 as applicable.

This 23rd day of October, 2023.

Linwood T. Downs III Professional Land Surveyor L-5327



1. PROJECT CONTROL WAS ESTABLISHED USING GNSS, THE GLOBAL NAVIGATION SATELLITE SYSTEM.

2. THE SURVEY CONTROL DATA FOR THIS PROJECT HAS BEEN COMPILED FROM VARIOUS SOURCES. IF FURTHER INFORMATION REGARDING PROJECT CONTROL IS NEEDED, PLEASE CONTACT THE LOCATION