

I:\25\2024\18\SEP18\018.00 NCDOT Div 6 U-4709\TP\Traffic\Signing\U-4709_SIGN-1.dgn
John Bauman

CONTRACT: –

TIP PROJECT: U–4709

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
CUMBERLAND COUNTY

LOCATION: SR 1112 (ROCKFISH ROAD) FROM SR 1115
(GOLFVIEW ROAD) TO SR 1449 (MAIN STREET) AND
SR 1115 (GOLFVIEW ROAD) FROM SR 1112
(ROCKFISH ROAD) TO SR 1449 (MAIN STREET)

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -
PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C.,
DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE
CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.20	SECONDARY SIGN MOUNTING
904.30	SUPPLEMENTAL SIGN MOUNTING
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS
910.20	SCHOOL UNMARKED CROSSWALKS WHERE SPEED REDUCTION REQUIRED
910.30	SIGNING UNSIGNALIZED SUPERSTREET
910.40	TWO LANE ROUNDABOUT WITH PEDESTRIAN

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	1725	LF
4102000000	904	SIGN ERECTION, TYPE E	103	EA
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE E (GROUND MOUNTED)	5	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	55	EA

PROJECT NOTES

- DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- SIGN ERECTION, RELOCATE SIGN TYPE E
- DISPOSAL OF SUPPORT, U-CHANNEL

GENERAL NOTES


- SIGNS FURNISHED BY STATE
- CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE GRADE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	SIGNING PLAN TITLE SHEET
SIGN-2	TYPE E SIGNS
SIGN-3-7	EXISTING SIGNS
SIGN-8-12	PROPOSED SIGNS

N.C.D.O.T. CONTACT INFORMATION

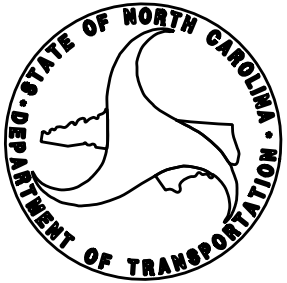James V. Flowers DIVISION TRAFFIC ENGINEER
SIGNING AND DELINEATION PROJECT DESIGN ENGINEER



PLAN PREPARED BY:
TRANSYSTEMS













Steve Miller, PE PROJECT MANAGER
John Bauman, PE DESIGN ENGINEER

TRANSYSTEMS

1 Glenwood Avenue
Raleigh, NC 27603
Tel: 919.789.9977
Fax: 919.789.9591
License: F-0453

TIP NO.	SHEET NO.
U-4709	SIGN-1
APPROVED: _____	
DATE: _____	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

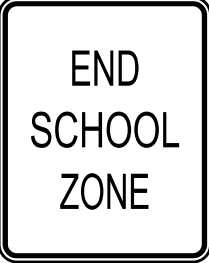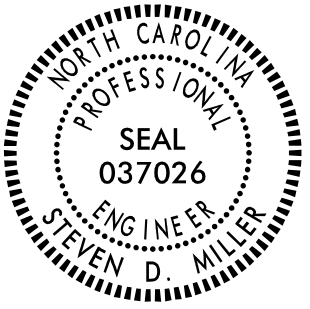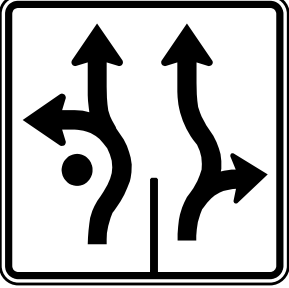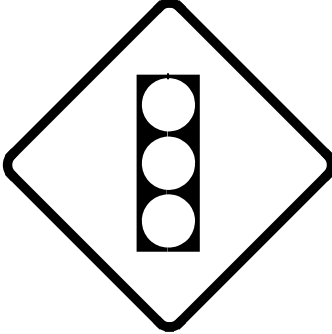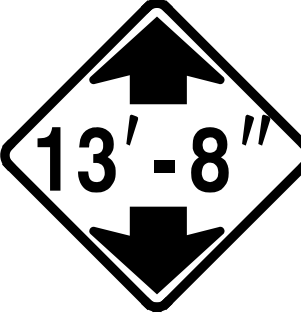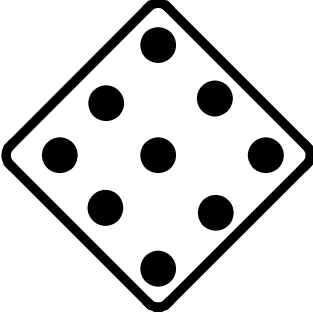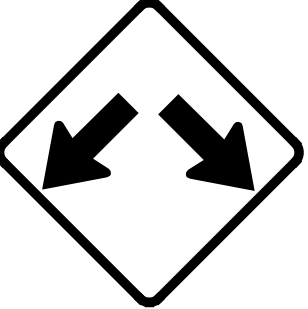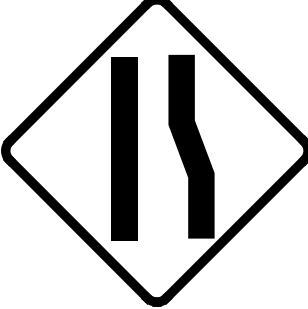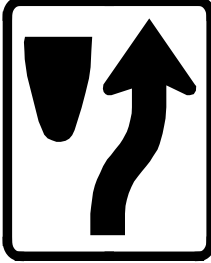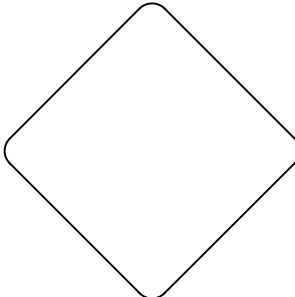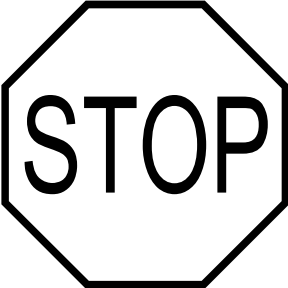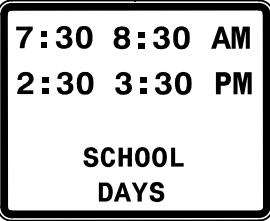7/16/2024 3:51:18 PM NCDOT Div 6 U-4709.TrafficSigning\U-4709_SIGN-2.dgn

401 QUANTITY REQ'D .6_  W2-6 36" X 36" ONE "U" POST PER SIGN	406 QUANTITY REQ'D .19_  R6-1R 36" X 12" MOUNTED ABOVE SIGN 405 IN 17 INSTALLATIONS	411 QUANTITY REQ'D .2_  R2-1 (25) 30" X 36" ONE "U" POST PER SIGN	416 QUANTITY REQ'D .6_  R2-1 (35) 30" X 36" ONE "U" POST PER SIGN	420 QUANTITY REQ'D .2_  S5-2 24" X 30" ONE "U" POST PER SIGN	424 QUANTITY REQ'D .16_  W16-7P 24" x 12" MOUNT BELOW SIGN 423 IN 16 INSTALLATIONS	TIP NO. U-4709 SHEET NO. SIGN-2 APPROVED: _____ DATE: _____ SEAL  DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED
402 QUANTITY REQ'D .4_  R3-8 36" X 36" ONE "U" POST PER SIGN	407 QUANTITY REQ'D .2_  S1-1 36" X 36" ONE "U" POST PER SIGN	412 QUANTITY REQ'D .16_  R1-2 36" X 36" ONE "U" POST PER SIGN	417 QUANTITY REQ'D .1_  W3-3 36" x 36" ONE "U" POST PER SIGN	421 QUANTITY REQ'D .1_  W12-2 36" X 36" ONE "U" POST PER SIGN	425 QUANTITY REQ'D .3_  OM4-1 18" X 18" ONE "U" POST PER SIGN	428 QUANTITY REQ'D .2_  W12-1 36" X 36" ONE "U" POST PER SIGN
403 QUANTITY REQ'D .2_  R3-8 36" X 36" ONE "U" POST PER SIGN	408 QUANTITY REQ'D .2_  S4-3P 36" X 12" MOUNT BELOW SIGN 407 IN 2 INSTALLATIONS	413 QUANTITY REQ'D .6_  R6-1R 48" X 18" TWO "U" POST PER SIGN		422 QUANTITY REQ'D .1_  W4-2R 36" x 36" ONE "U" POST PER SIGN	426 QUANTITY REQ'D .8_  R4-7 24" X 30" ONE "U" POST PER SIGN	
404 QUANTITY REQ'D .2_  S4-5 36" X 36" ONE "U" POST PER SIGN	409 QUANTITY REQ'D .2_  S4-3P 24" X 8" MOUNTED ABOVE SIGN 411 IN 2 INSTALLATIONS		419 QUANTITY REQ'D .1_  R4-1 24" X 30" ONE "U" POST PER SIGN	423 QUANTITY REQ'D .16_  W11-2 36" x 36" ONE "U" POST PER SIGN	427 QUANTITY REQ'D .16_  OM1-3 18" X 18" MOUNT BELOW SIGN 426 IN 8 INSTALLATIONS MOUNT BELOW SIGN 406 IN 2 INSTALLATIONS MOUNT BELOW SIGN 413 IN 6 INSTALLATIONS	
405 QUANTITY REQ'D .18_  R1-1 36" X 36" ONE "U" POST PER SIGN	410 QUANTITY REQ'D .2_  S4-1A 24" X 24" MOUNT BELOW SIGN 411 IN 2 INSTALLATIONS	415 QUANTITY REQ'D .2_  R3-7 L 30" X 30" ONE "U" POSTS PER SIGN	TRANSYSTEMS 1 Glenwood Avenue Raleigh, NC 27603 Tel:919.789.9977 Fax:919.789.9591 License: F-0453			TYPE "E" SIGNS

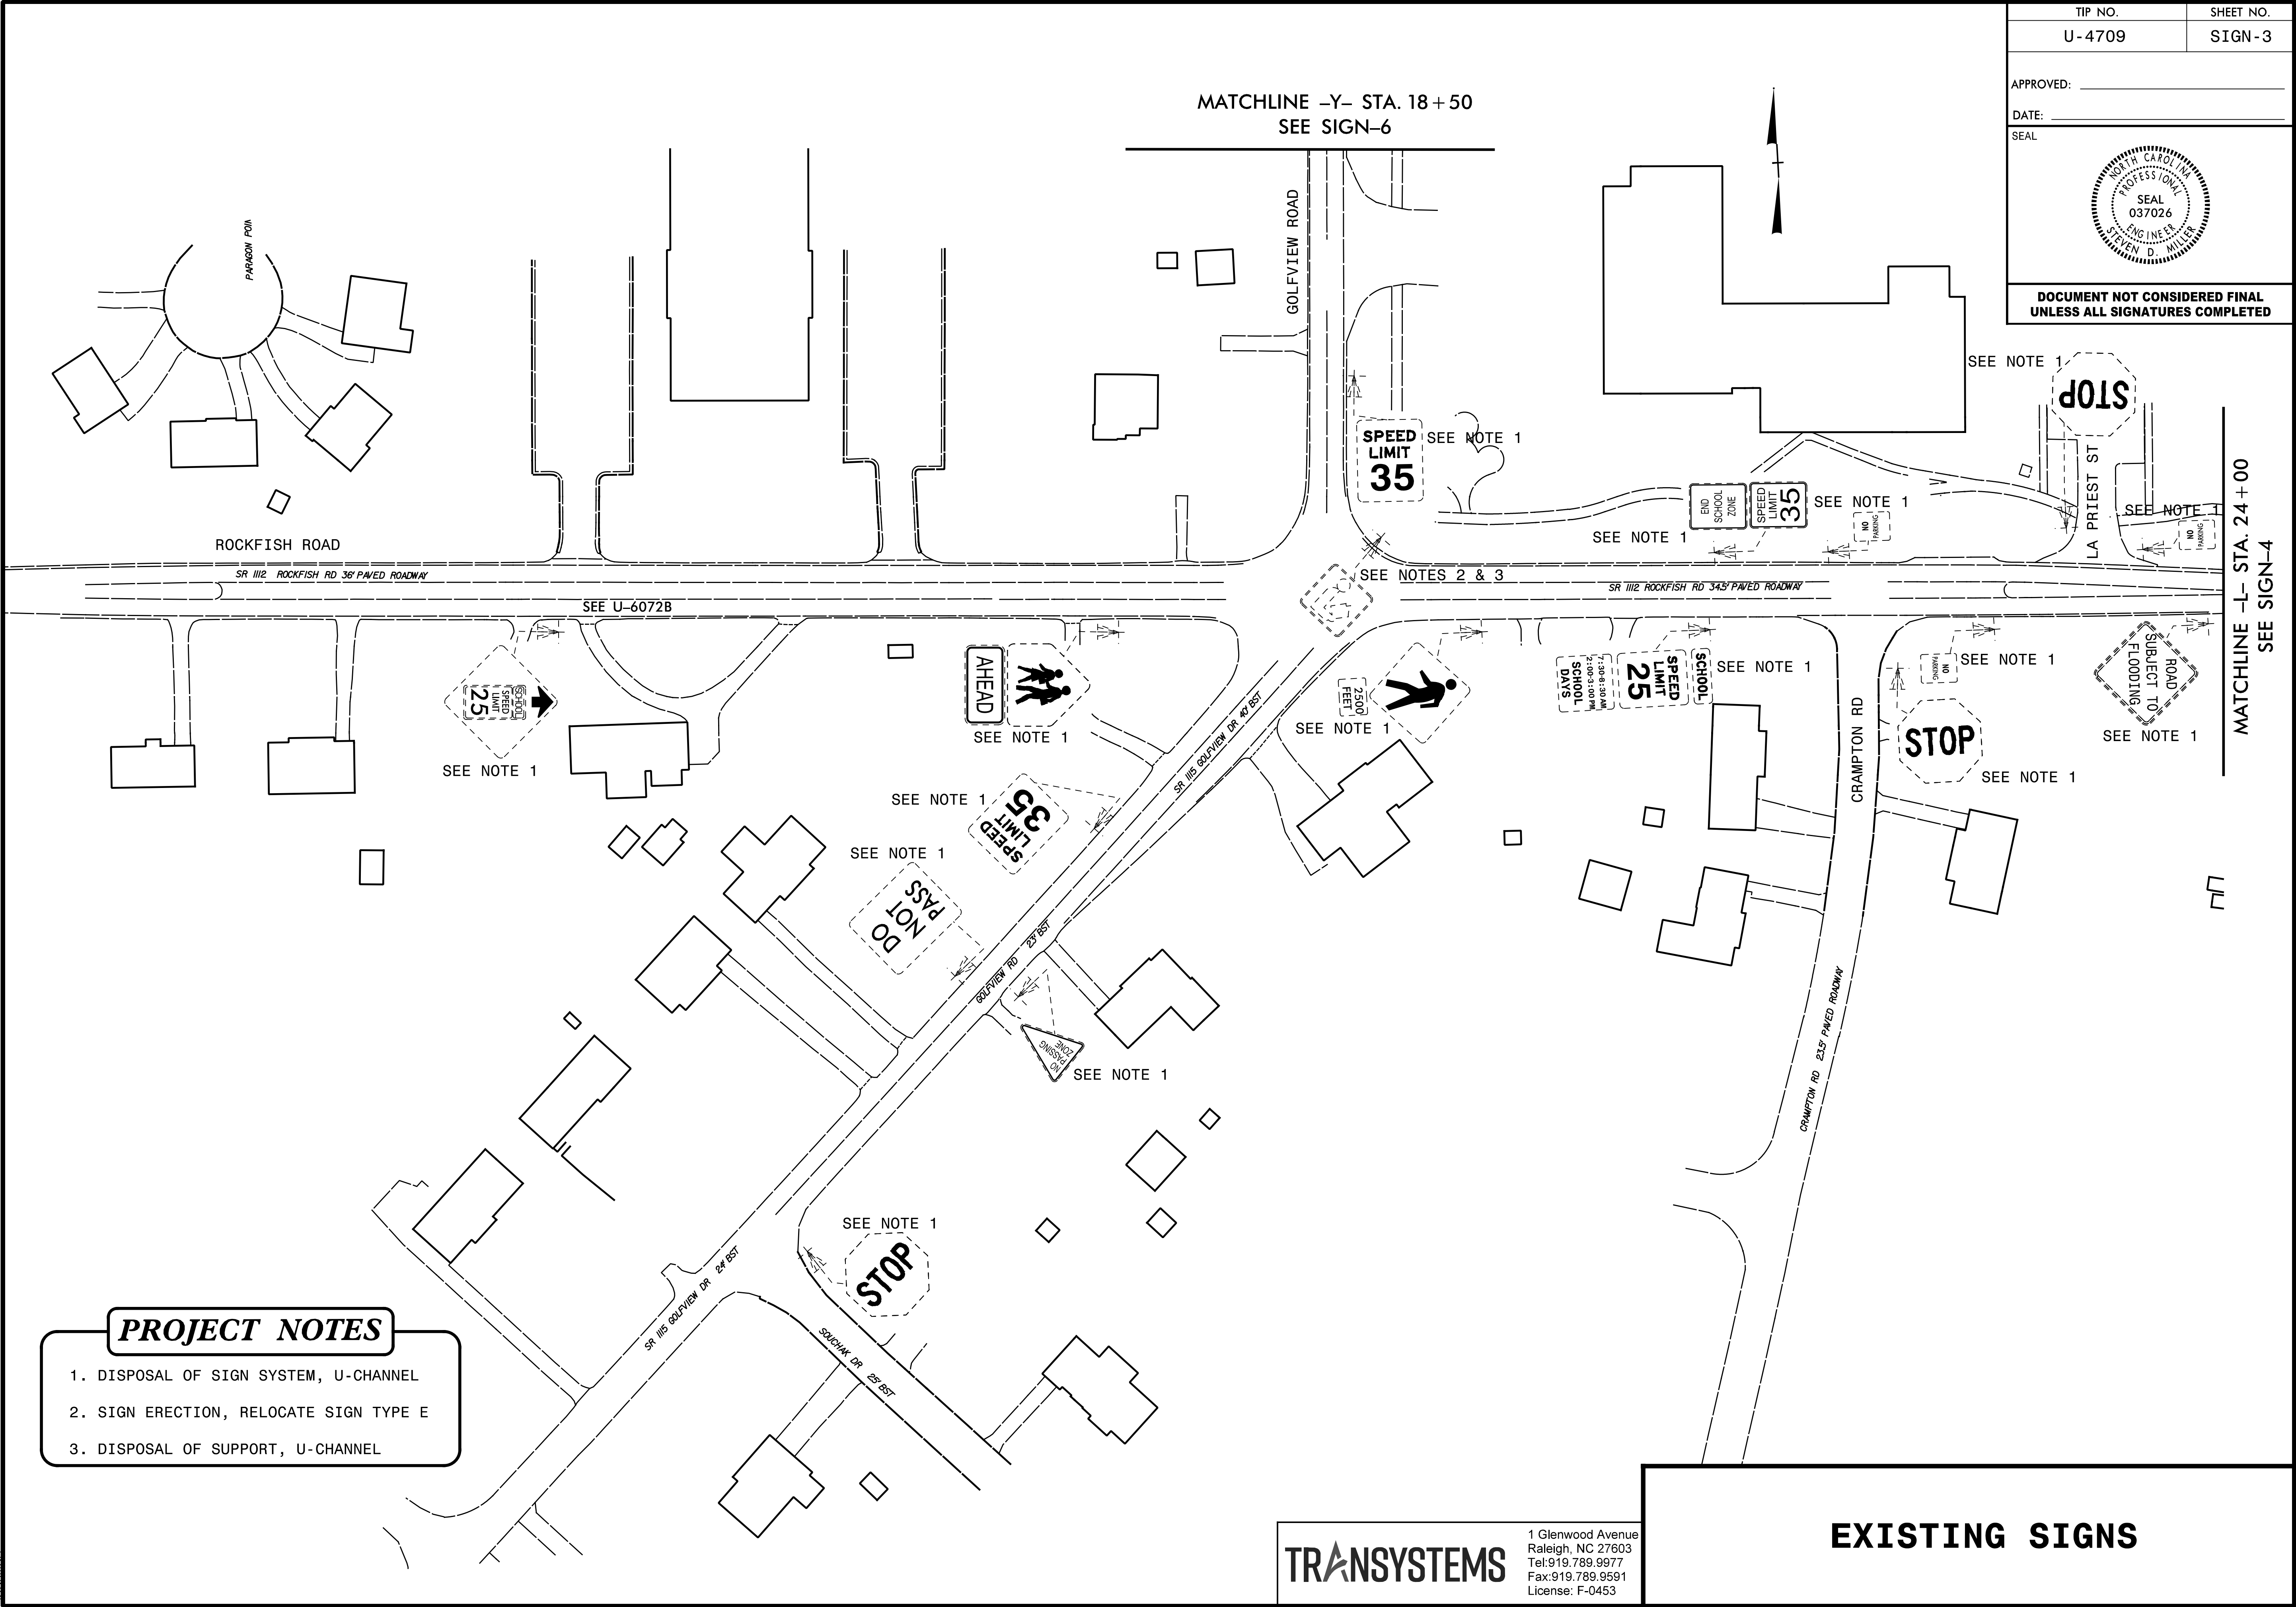
TIP NO.
U - 4709

SHEET NO.
SIGN - 3

APPROVED: _____
DATE: _____
SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
037026
ENGINEER
STEVEN D. MILLER

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED




MATCHLINE -Y- STA. 18+50
SEE SIGN-6

MATCHLINE -L- STA. 24+00
SEE SIGN-4

7/16/2024 3:51:18 PM C:\Users\jgordon\OneDrive\Documents\Projects\U-4709\Traffic\Signing\U-4709_SIGN-4.dgn

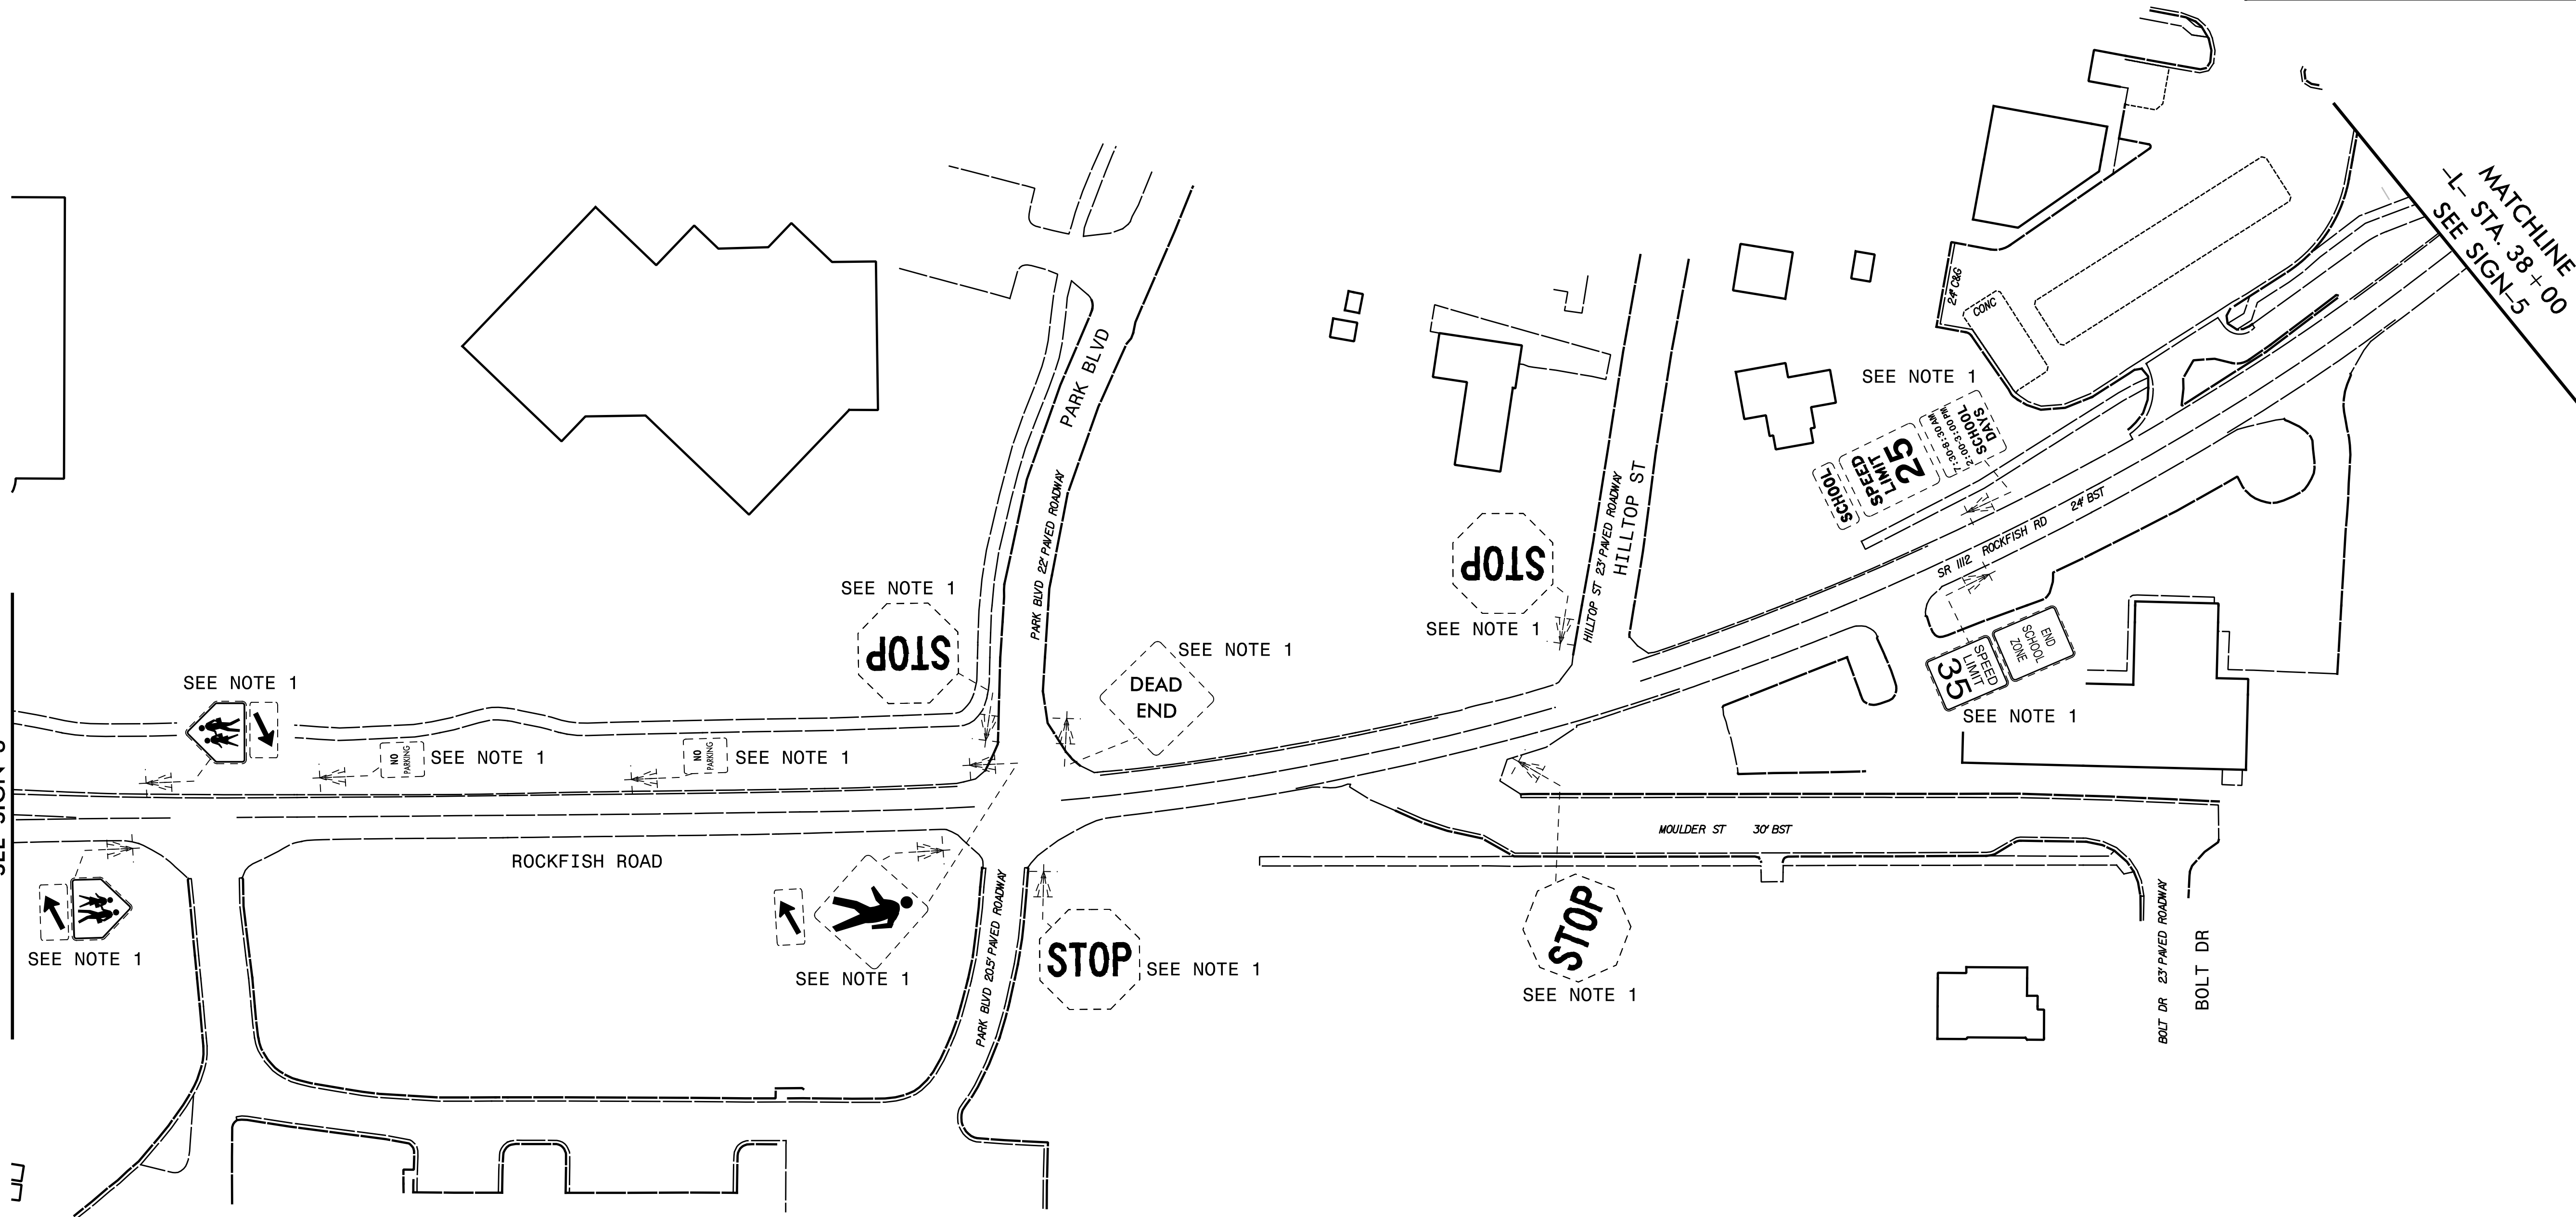MATCHLINE -L- STA. 24+00
SEE SIGN-3



PROJECT NOTES

1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
2. SIGN ERECTION, RELOCATE SIGN TYPE E
3. DISPOSAL OF SUPPORT, U-CHANNEL

TRANSYSTEMS

1 Glenwood Avenue
Raleigh, NC 27603
Tel: 919.789.9977
Fax: 919.789.9591
License: F-0453

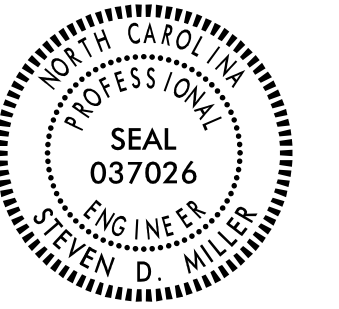
EXISTING SIGNS

TIP NO. U-4709
SHEET NO. SIGN-4

APPROVED: _____

DATE: _____


SEAL




**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

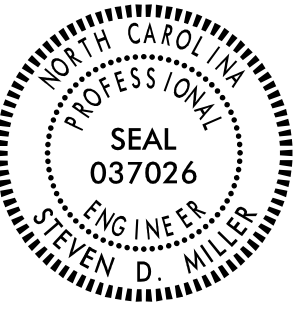MATCHLINE -L- STA. 38+00
SEE SIGN-5



TIP NO.	SHEET NO.
U - 4709	SIGN - 7
APPROVED: _____	
DATE: _____	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

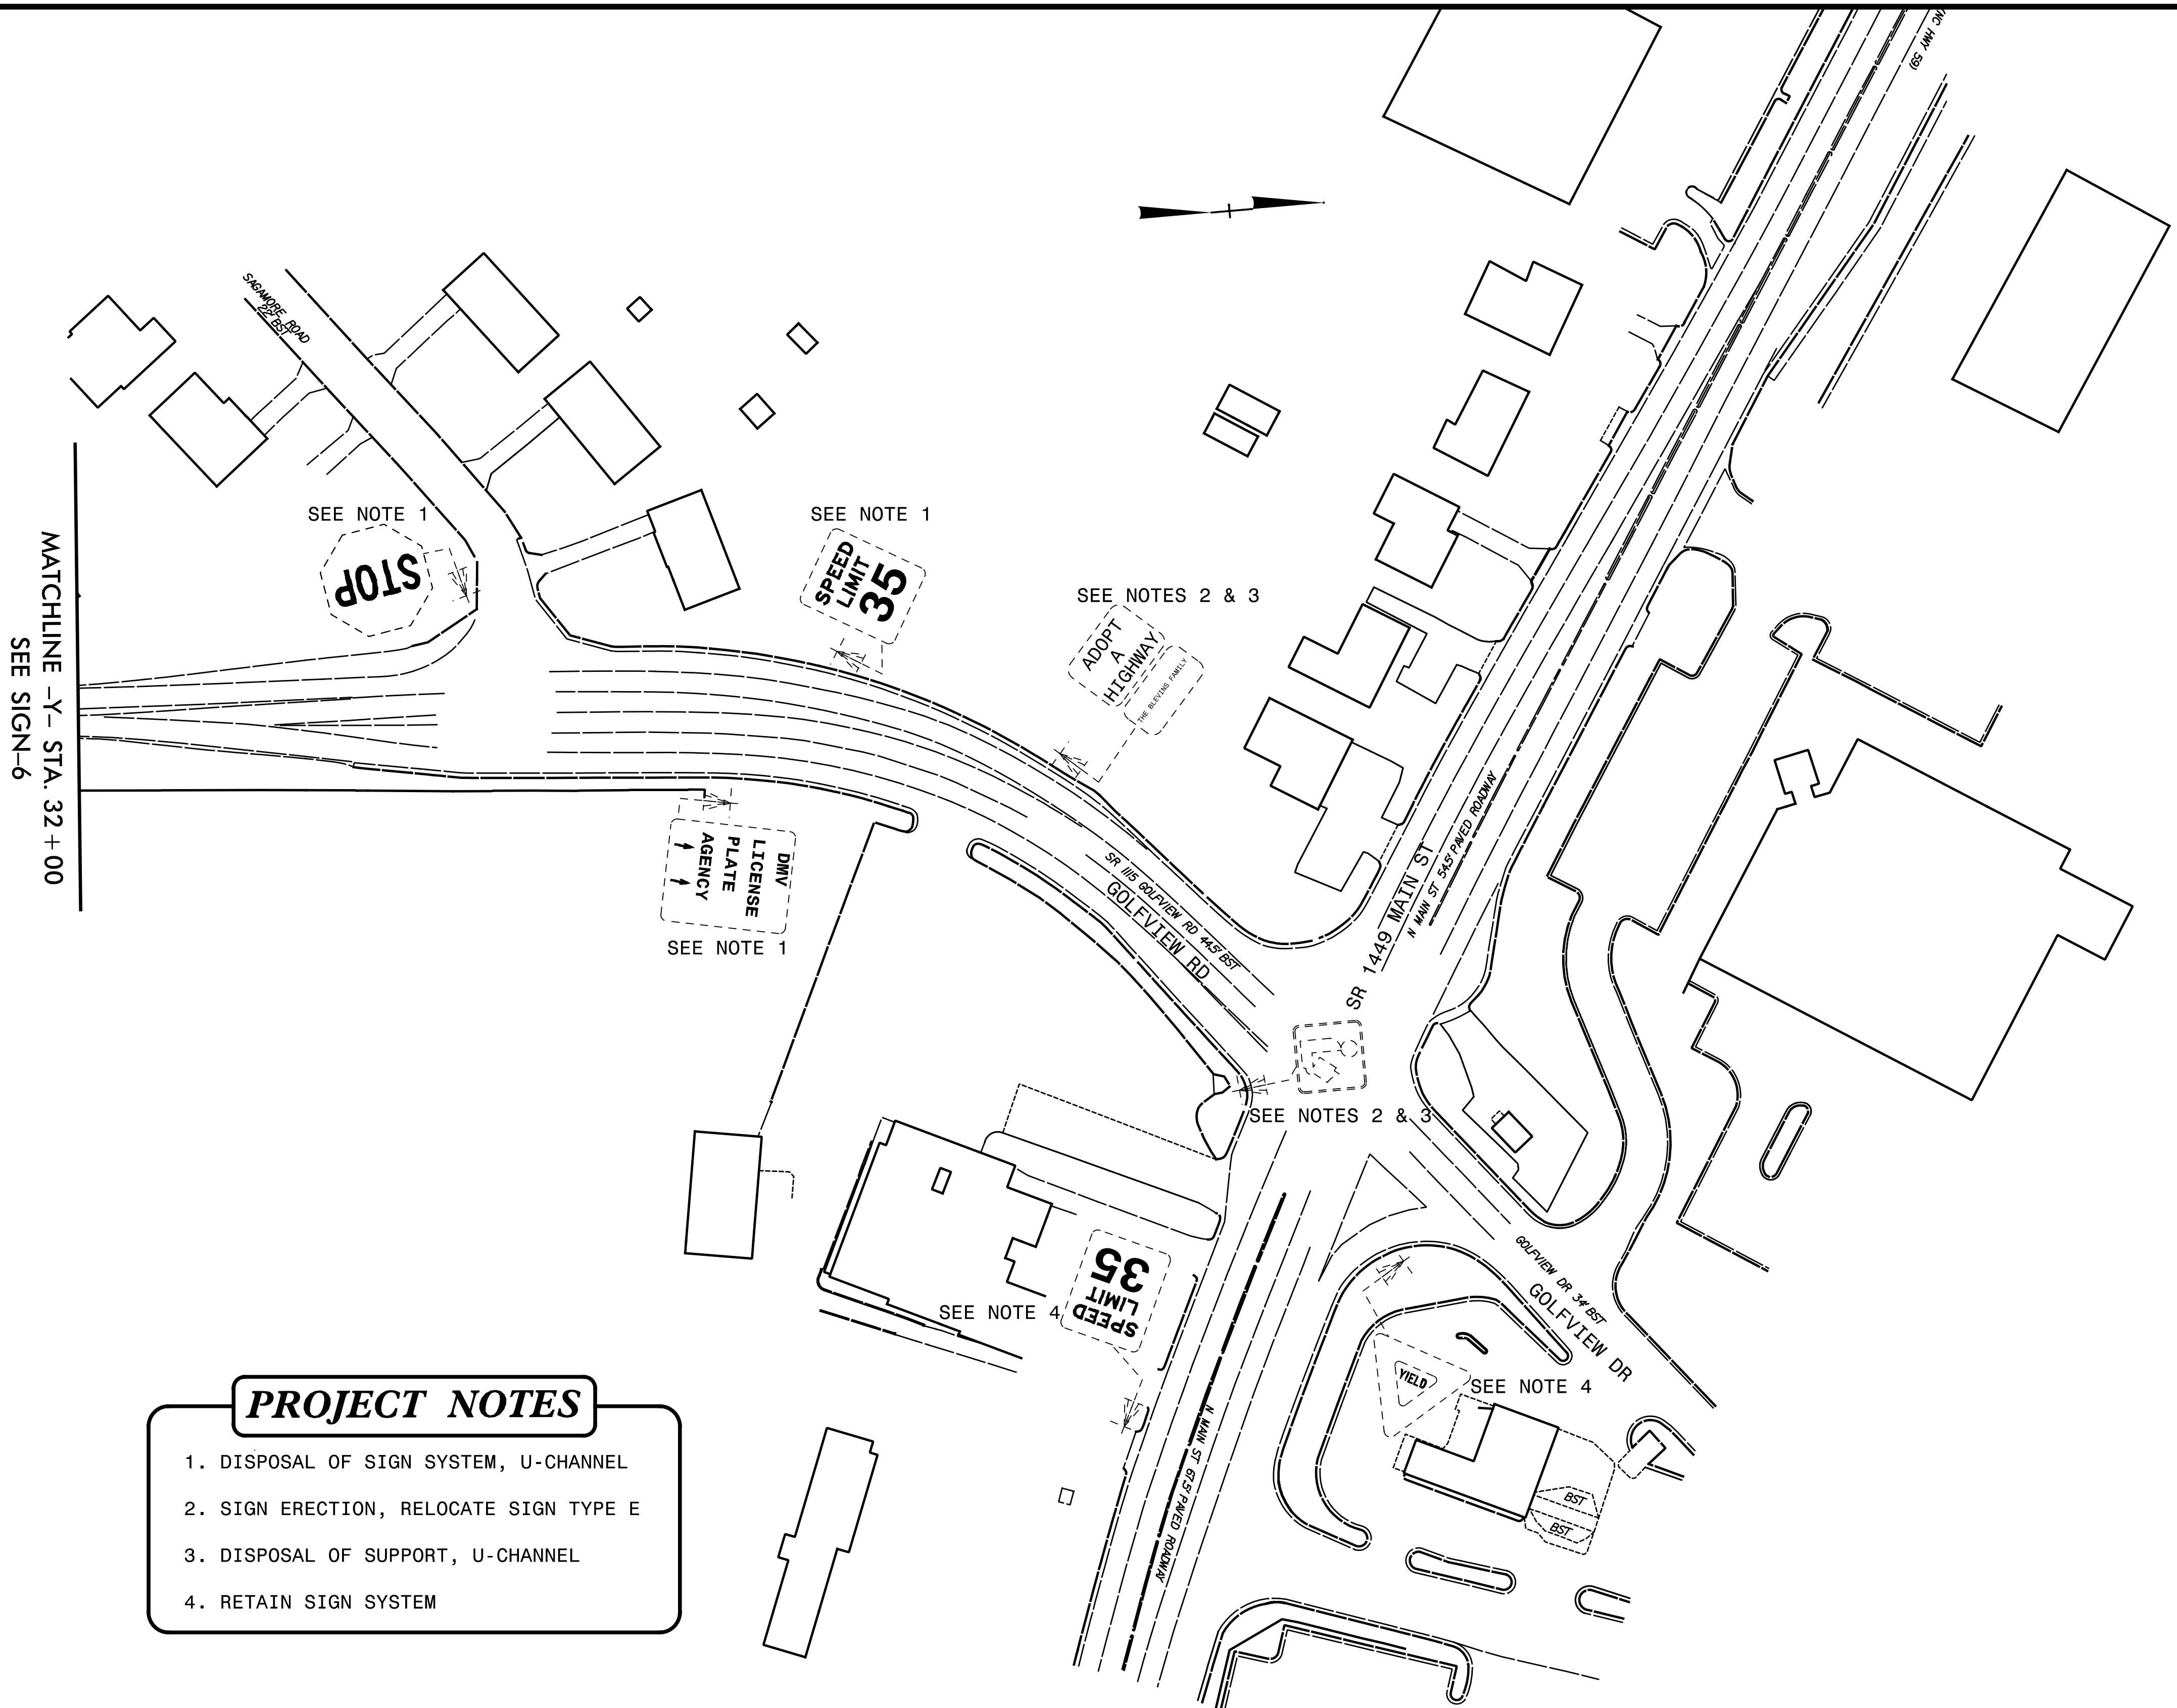

- PROJECT NOTES**
1. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
 2. SIGN ERECTION, RELOCATE SIGN TYPE E
 3. DISPOSAL OF SUPPORT, U-CHANNEL
 4. RETAIN SIGN SYSTEM

TIP NO.
U - 4709

SHEET NO.
SIGN-8

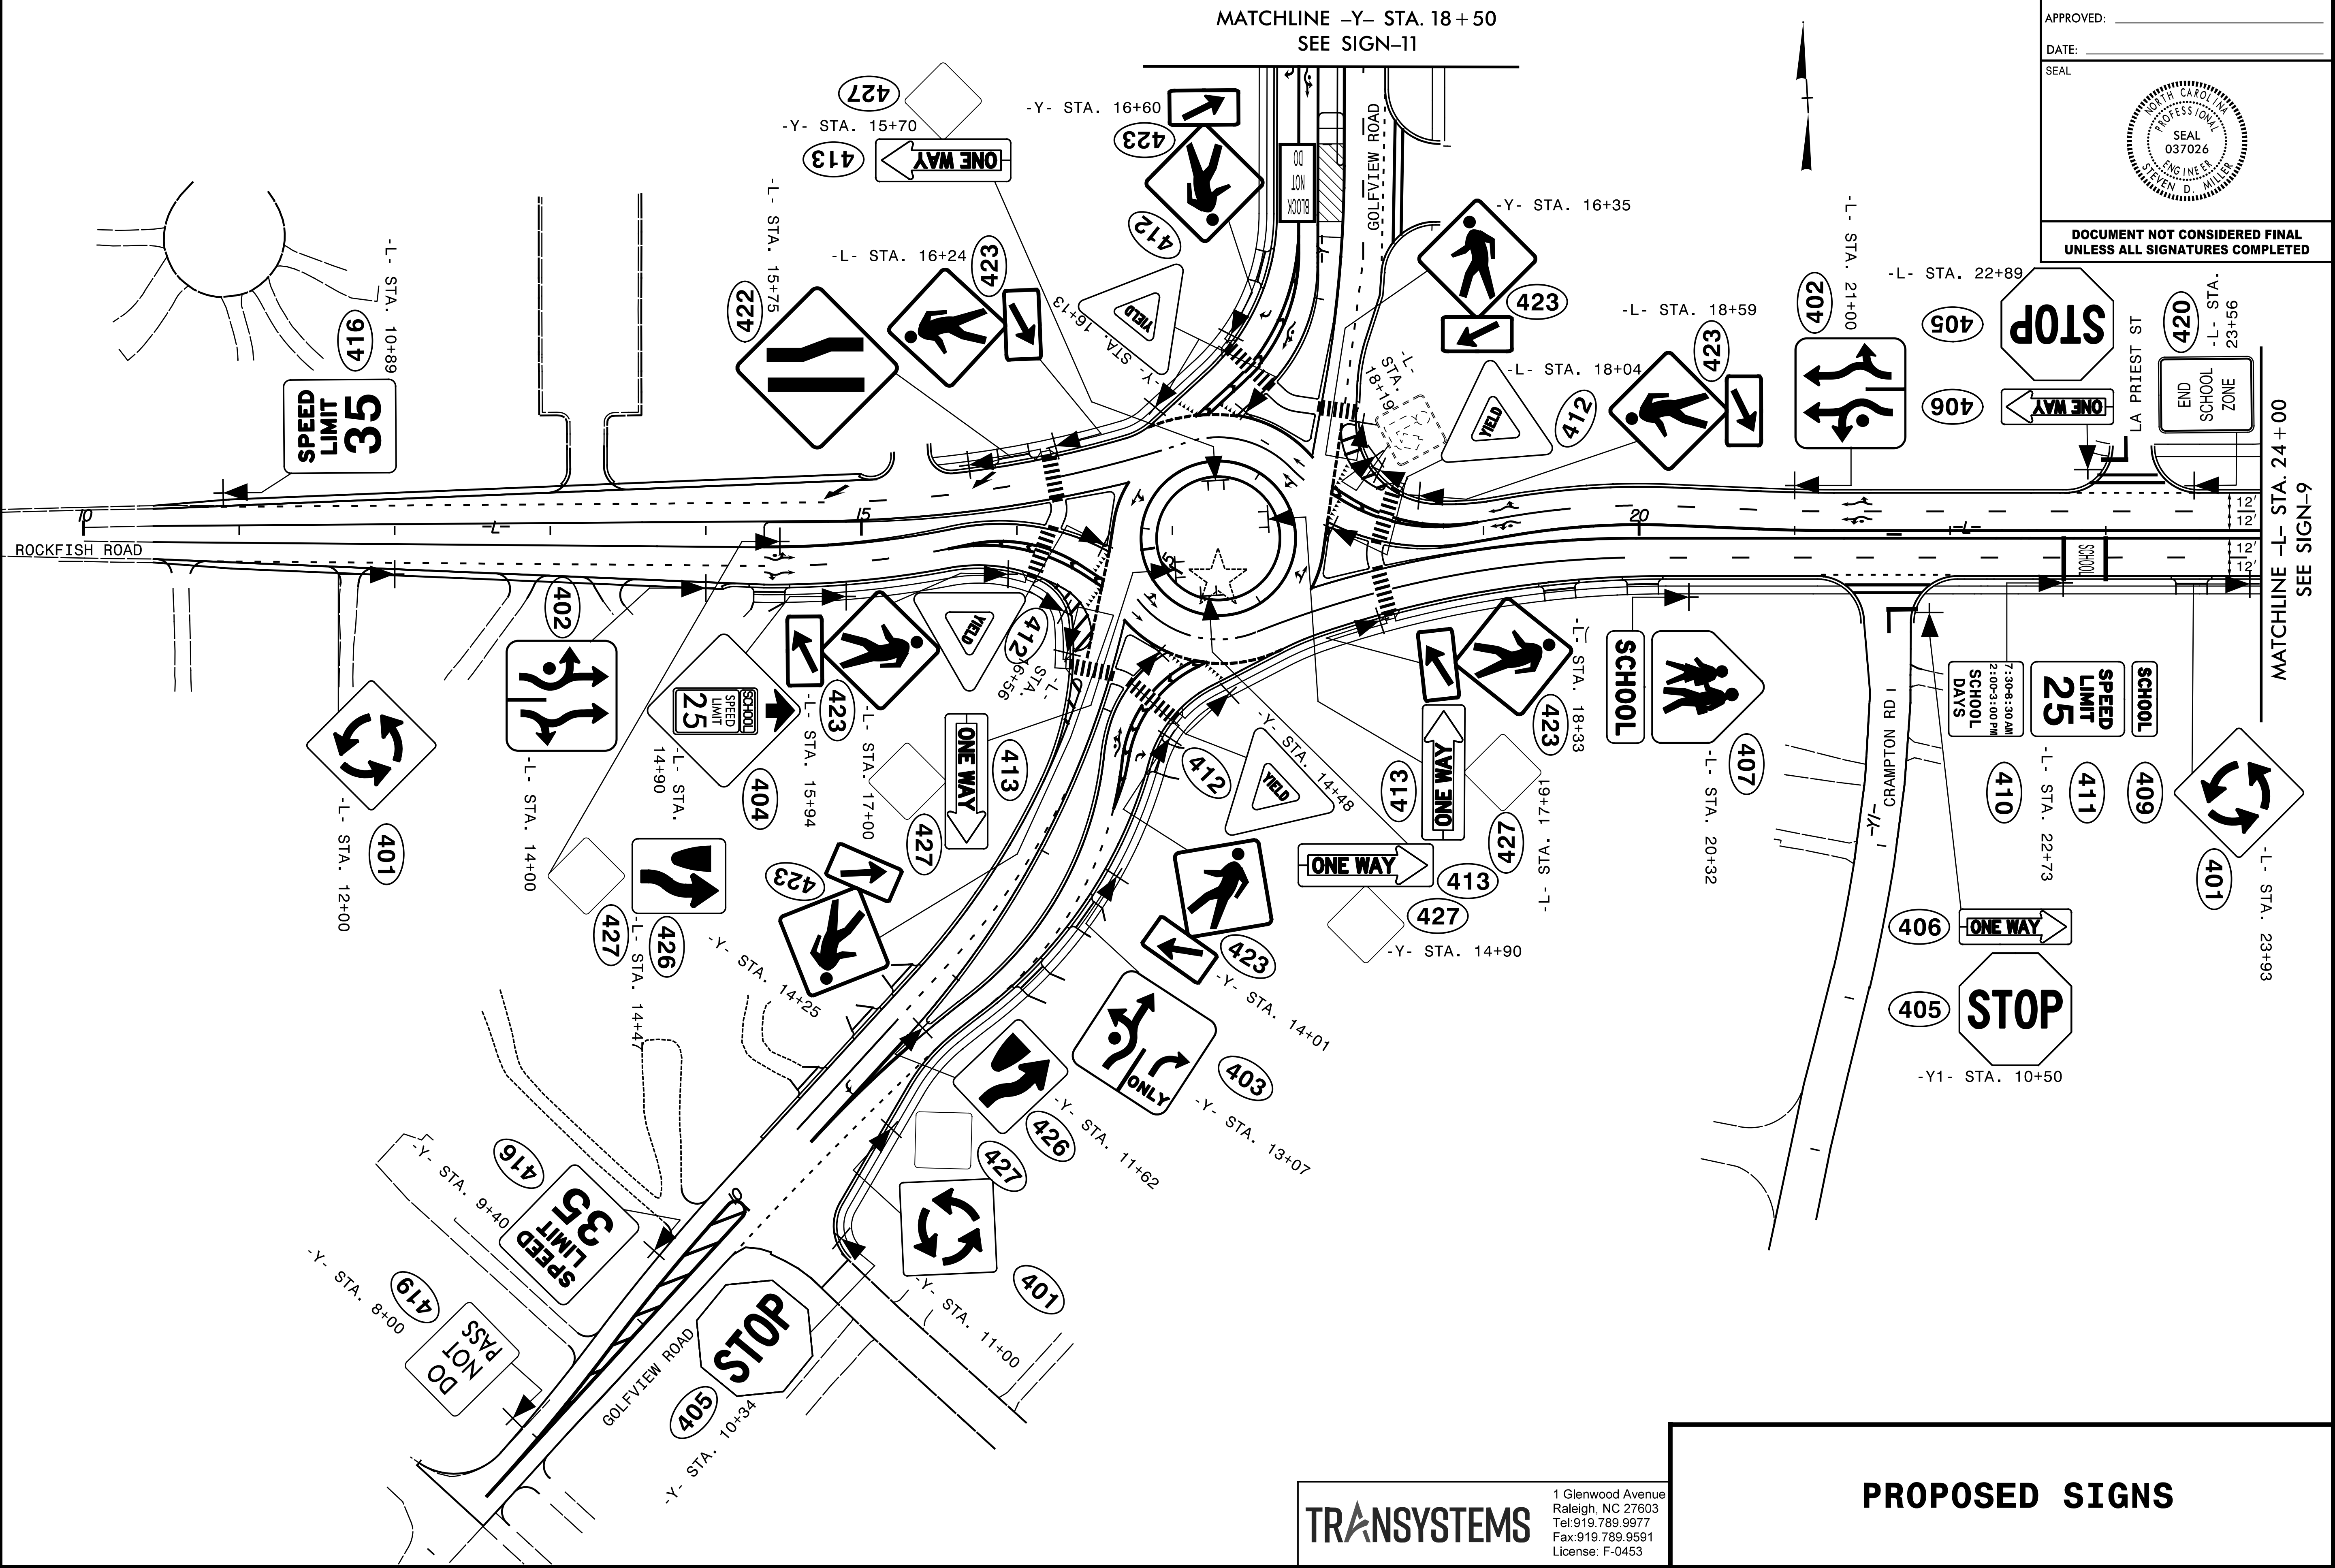
APPROVED: _____

DATE: _____


SEAL


NORTH CAROLINA
PROFESSIONAL
SEAL
037026
ENGINEER
STEVEN D. MILLER

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED



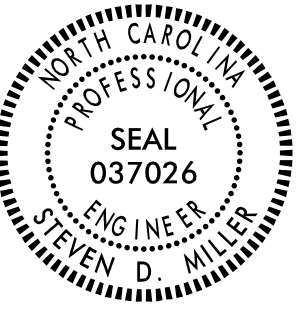7/16/2024 1:50:08 PM C:\Users\jgordon\OneDrive\Documents\Projects\U-4709\Signs\U-4709_SIGN-8.dgn

TIP NO.	SHEET NO.
U - 4709	SIGN - 10
APPROVED: _____	
DATE: _____	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

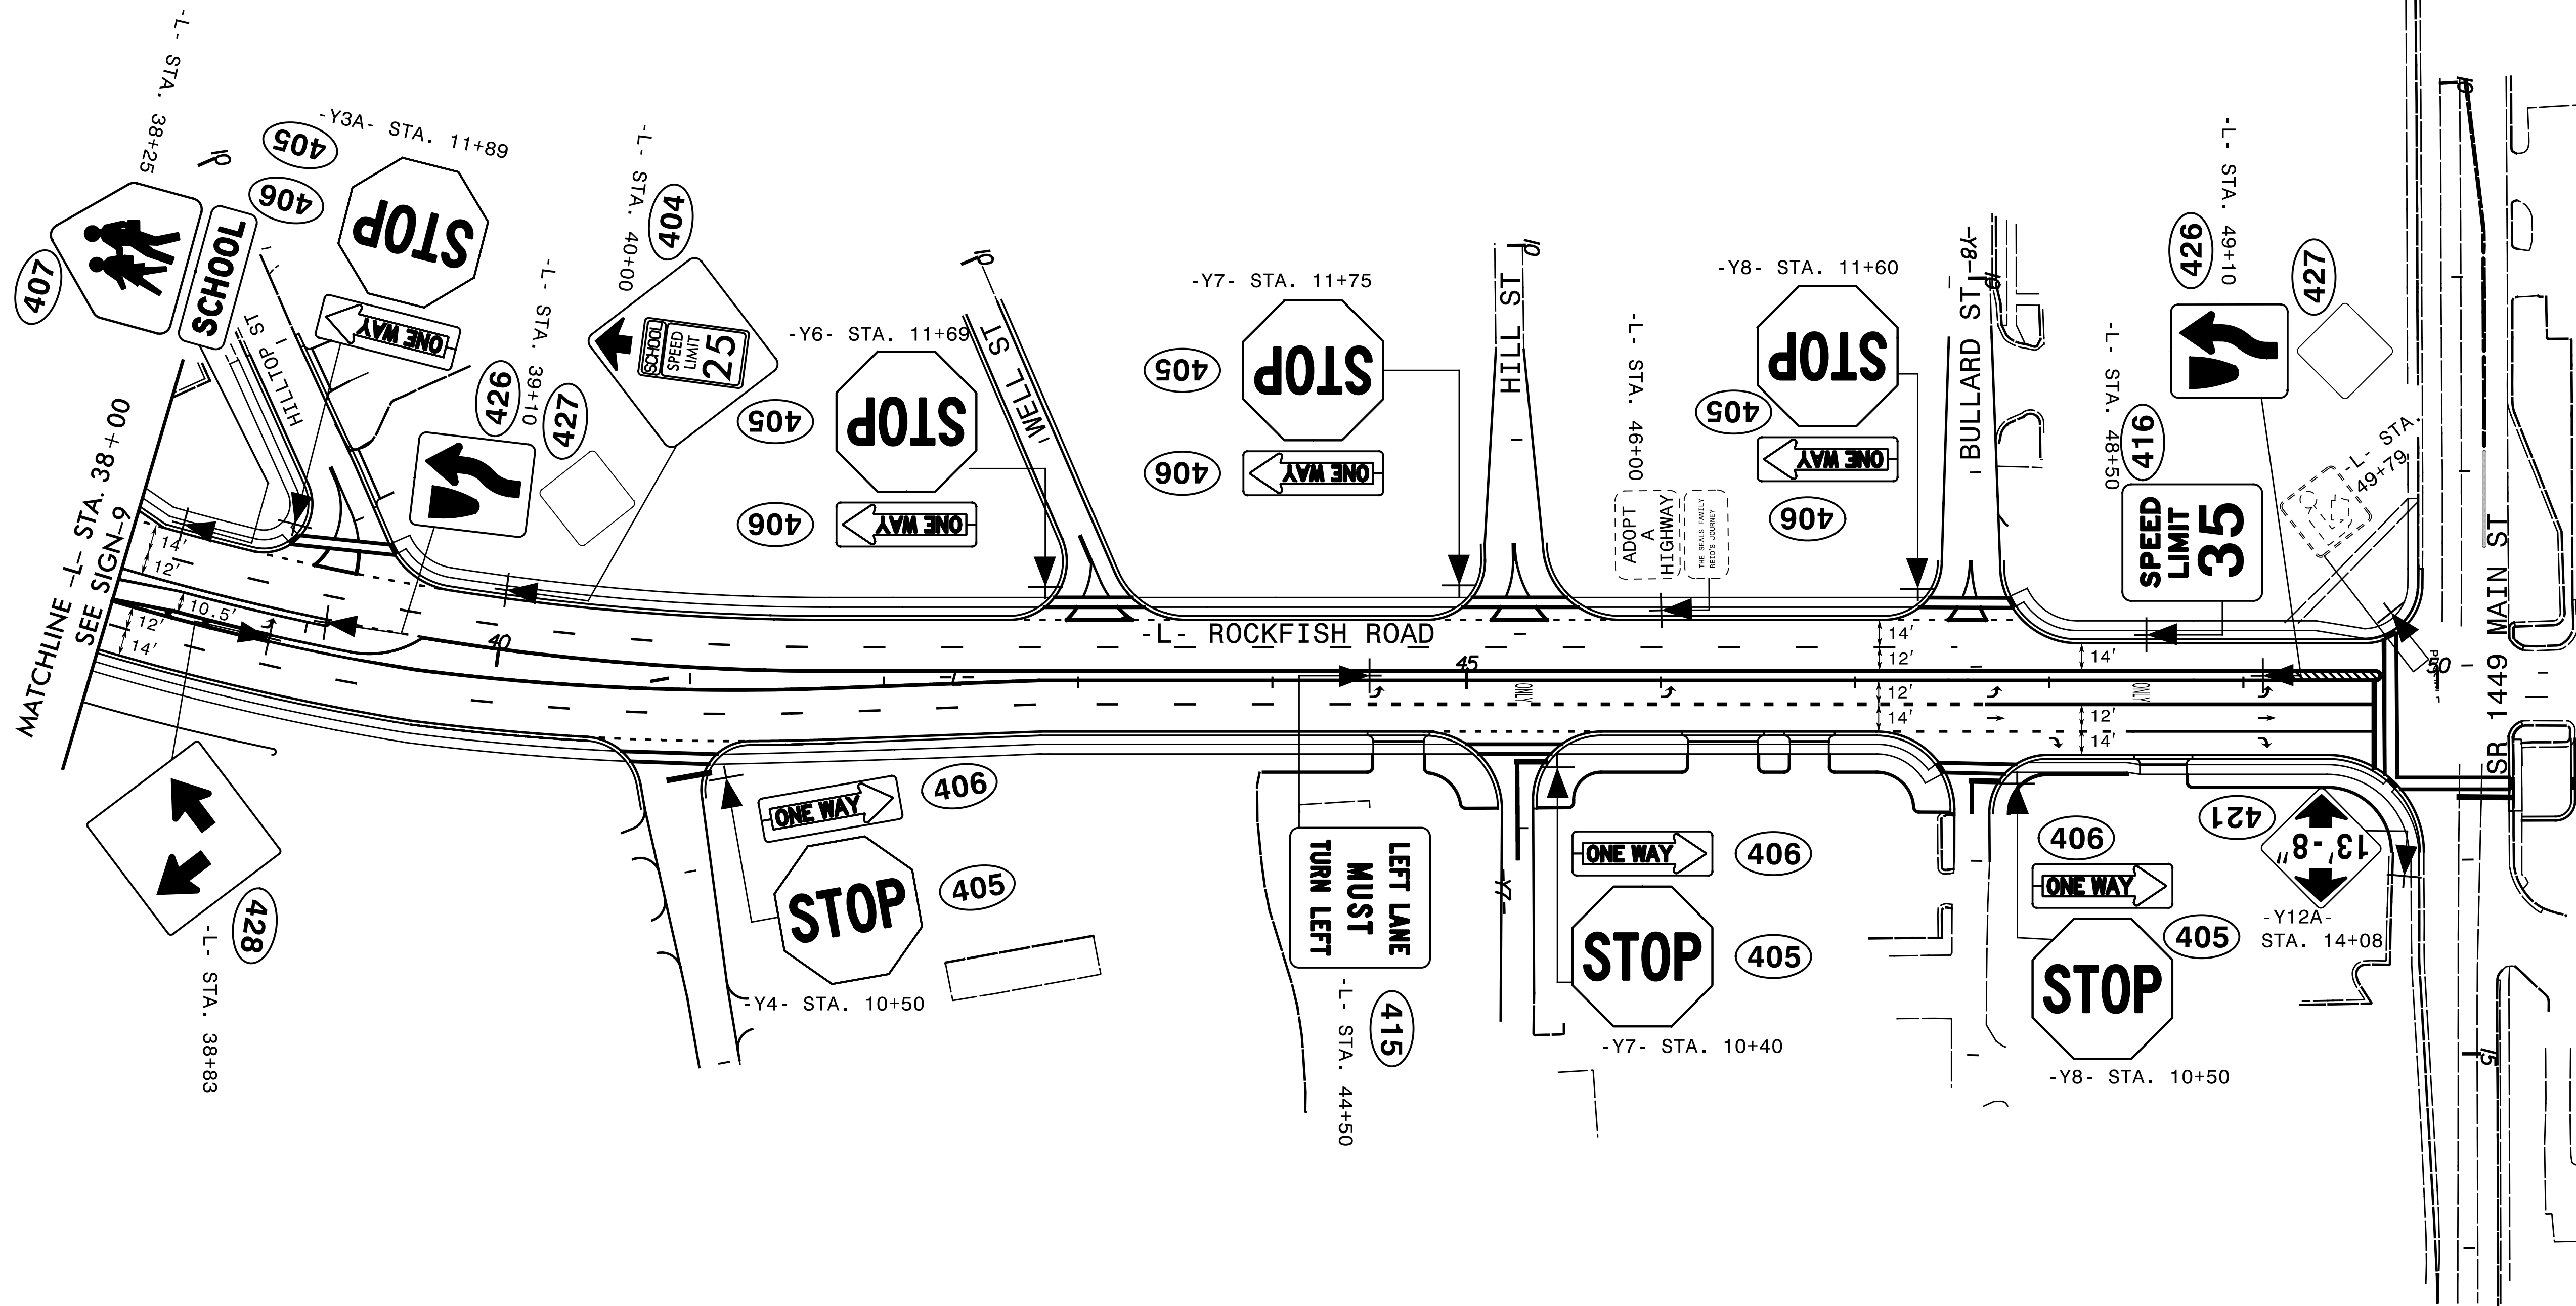

PROPOSED SIGNS

TRANSYSTEMS

1 Glenwood Avenue
Raleigh, NC 27603
Tel: 919.789.9977
Fax: 919.789.9591
License: F-0453

7/16/2024 3:51:18 PM C:\Users\jgordon\OneDrive\Documents\Projects\4709\Signing\10-U-4709_SIGN-10.dgn

