







**Whitman, Reardon & Associates, LLP**  
 1201 Edwards Mill Road, Suite 320, Raleigh, North Carolina 27606

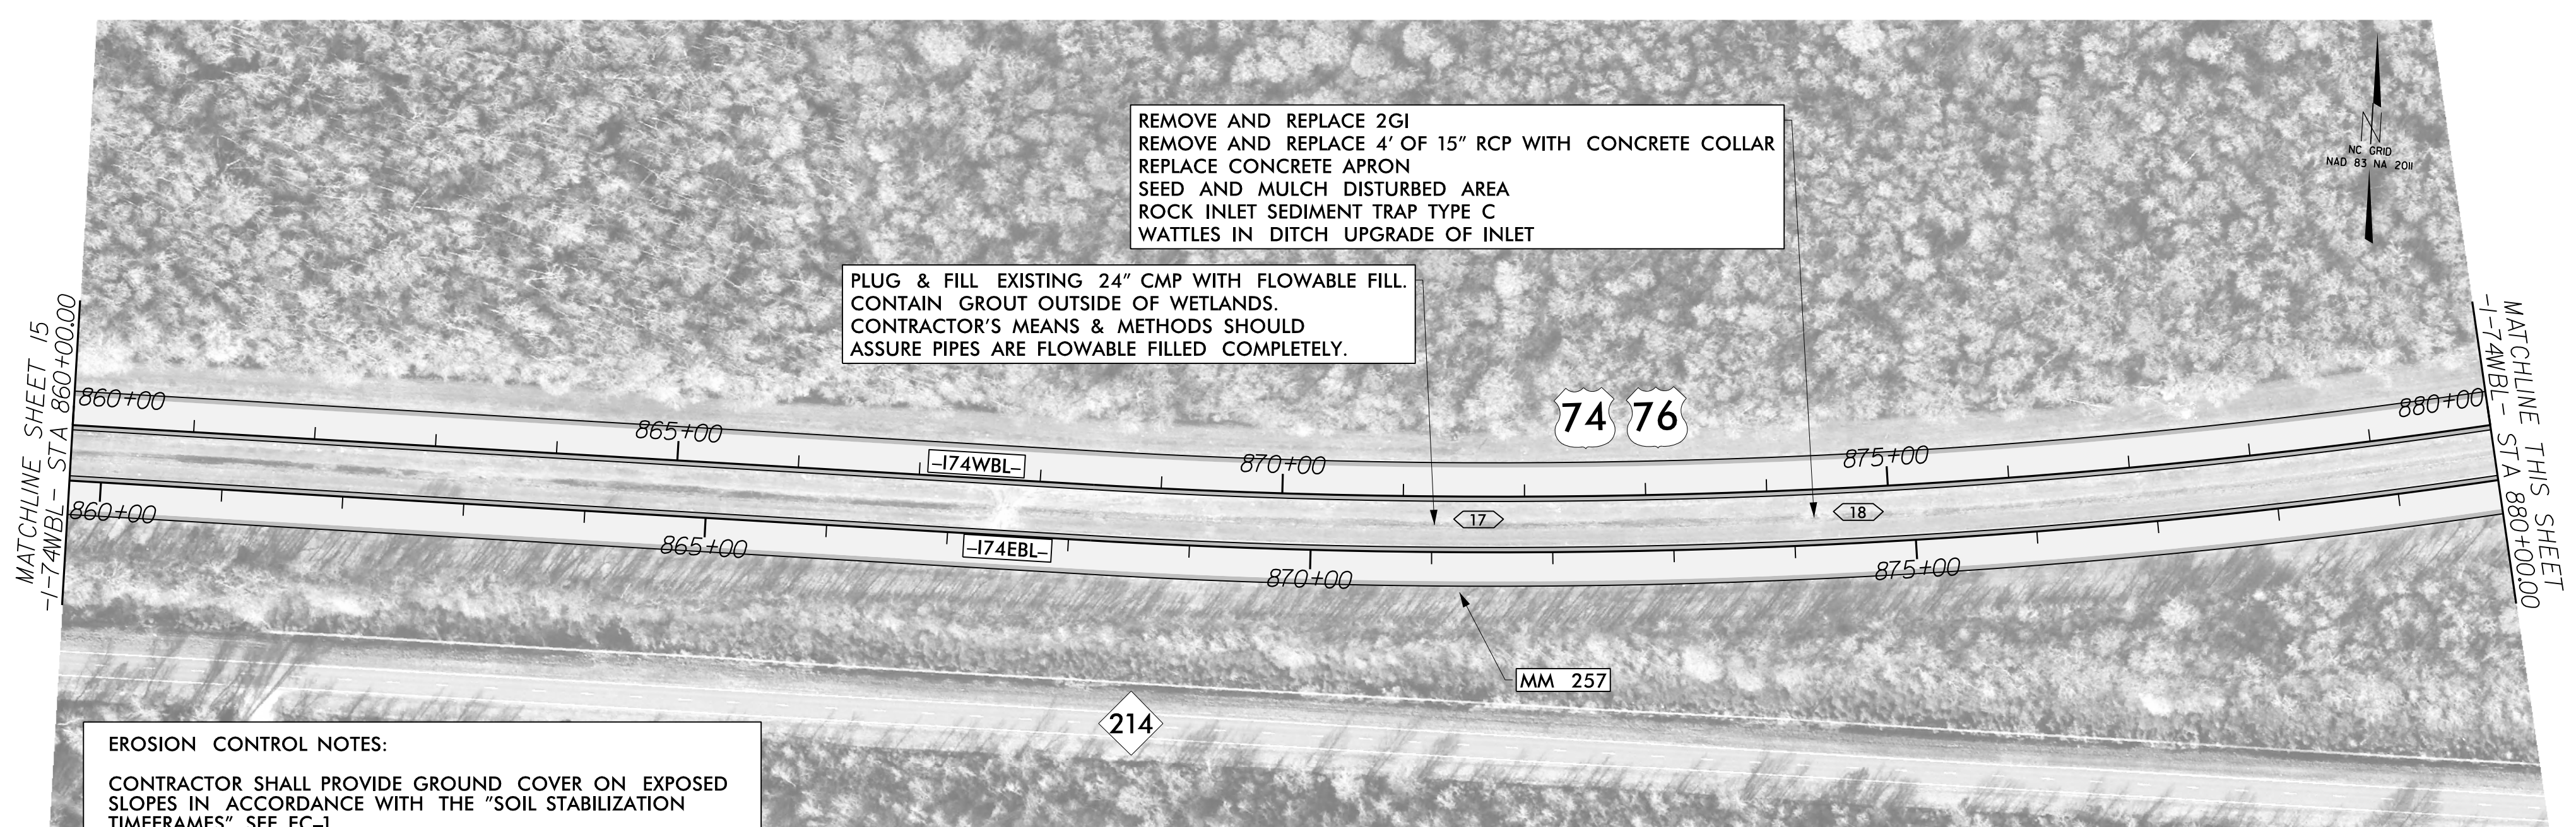

REMOVE AND REPLACE 2GI  
 REMOVE AND REPLACE 4' OF 15" RCP WITH CONCRETE COLLAR  
 REPLACE CONCRETE APRON  
 SEED AND MULCH DISTURBED AREA  
 ROCK INLET SEDIMENT TRAP TYPE C  
 WATTLES IN DITCH UPGRADE OF INLET

PLUG & FILL EXISTING 24" CMP WITH FLOWABLE FILL.  
 CONTAIN GROUT OUTSIDE OF WETLANDS.  
 CONTRACTOR'S MEANS & METHODS SHOULD  
 ASSURE PIPES ARE FLOWABLE FILLED COMPLETELY.

**EROSION CONTROL NOTES:**  
 CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES IN ACCORDANCE WITH THE "SOIL STABILIZATION TIMEFRAMES", SEE EC-1.  
 PROVIDE CONCRETE WASHOUT STRUCTURE IN ACCORDANCE WITH EROSION CONTROL SPECIAL PROVISION AND SPECIAL DETAIL "ONSITE CONCRETE WASHOUT STRUCTURE WITH LINER". SEE EC-2.  
 INSTALL EROSION CONTROL MEASURES IN ACCORDANCE WITH EROSION CONTROL DETAIL AND AS DIRECTED BY ENGINEER. SEE EC-3.  
 CONTRACTOR SHALL PROVIDE INLET PROTECTION FOR PARTIALLY INSTALLED STORM DRAINS. THIS MEASURE SHOULD BE INSTALLED AT THE END OF EACH WORKING DAY.

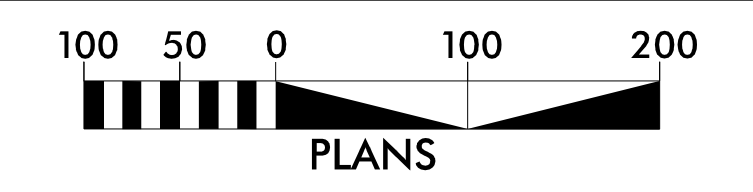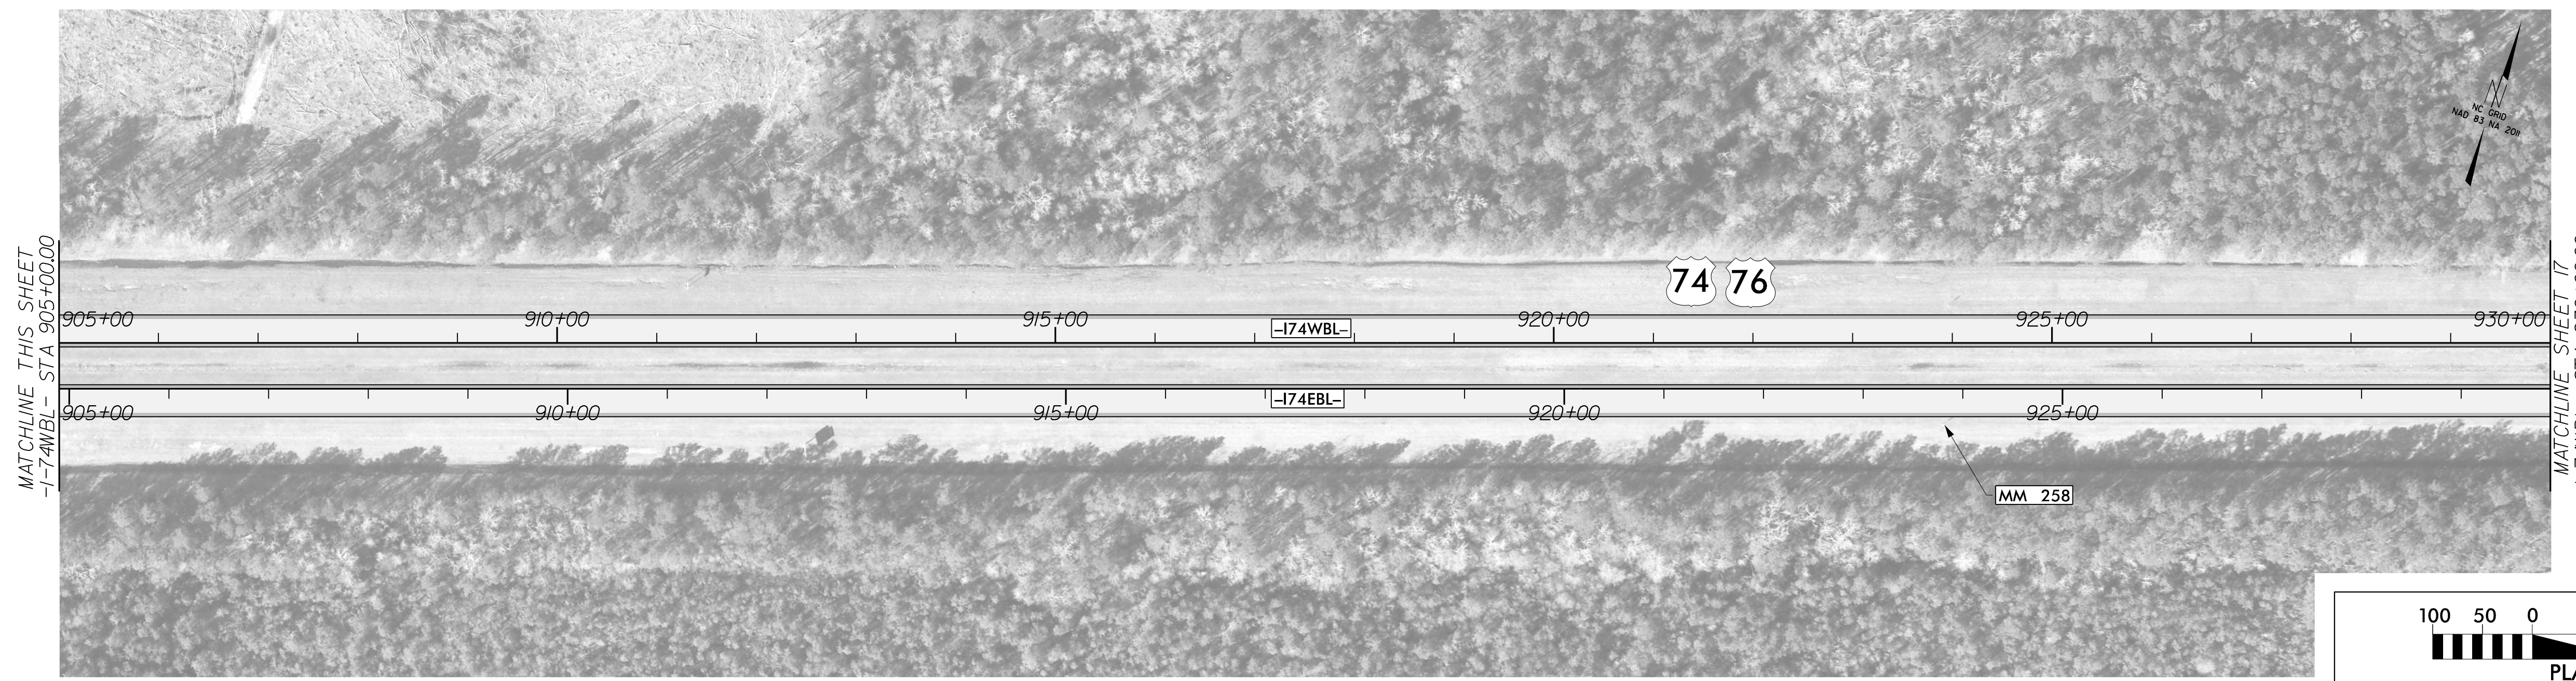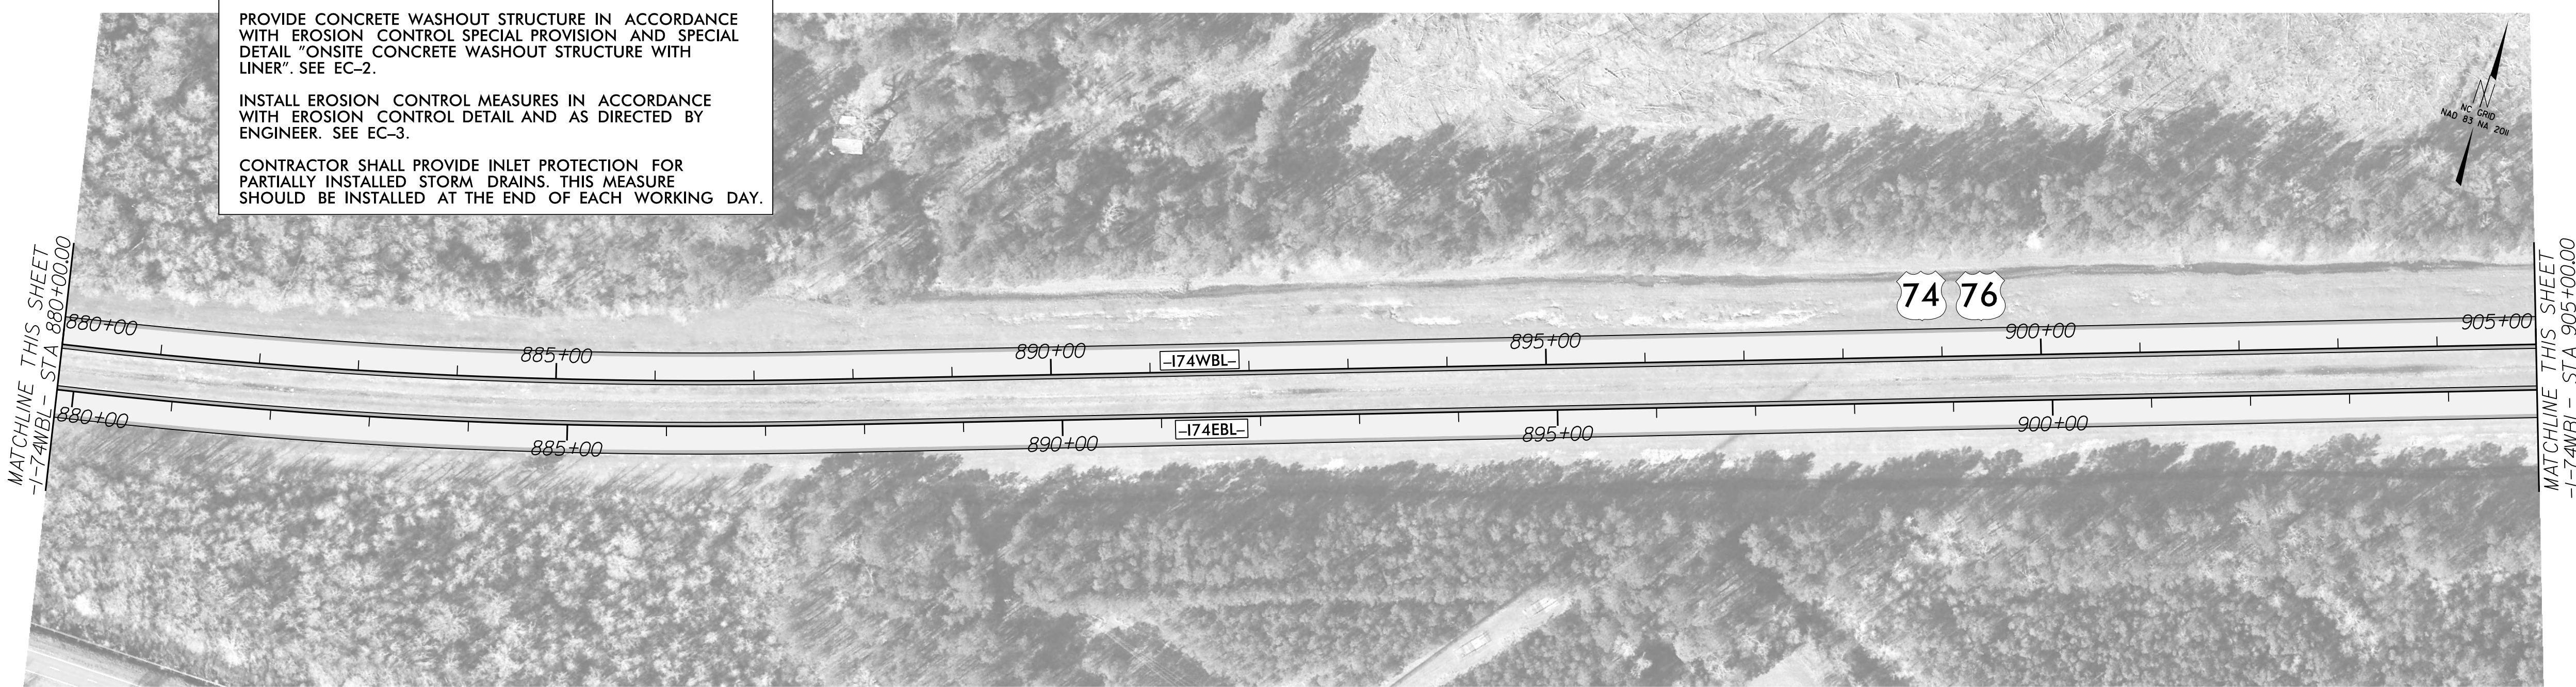

8/17/99  
 I:\2715\AM\18006\002\CADD\NCDOT\Roadway\Proj\HI-0018\HI-0018\_RDY\_PSH-16.dgn  
 10/27/15