


PLOT DRIVER: NCDOT_color_eng_50.plt
USER: CHARNDEN
FILE: p:\pwhdr\users\01\HDR_US-East_01\Documents\3322\10001377\10086176\6.0_CAD\BIM\6.2_Work\In_Progress\R-4463A\Traffic\Pavement_Marking\R4463A_PML_PMP04.dgn
PENTABLE: NCDOT_PMP.tbl
DATE: 2/18/2025
TIME: 4:51:12 PM

MATCHLINE -L- STA. 33+00, SEE PMP-3

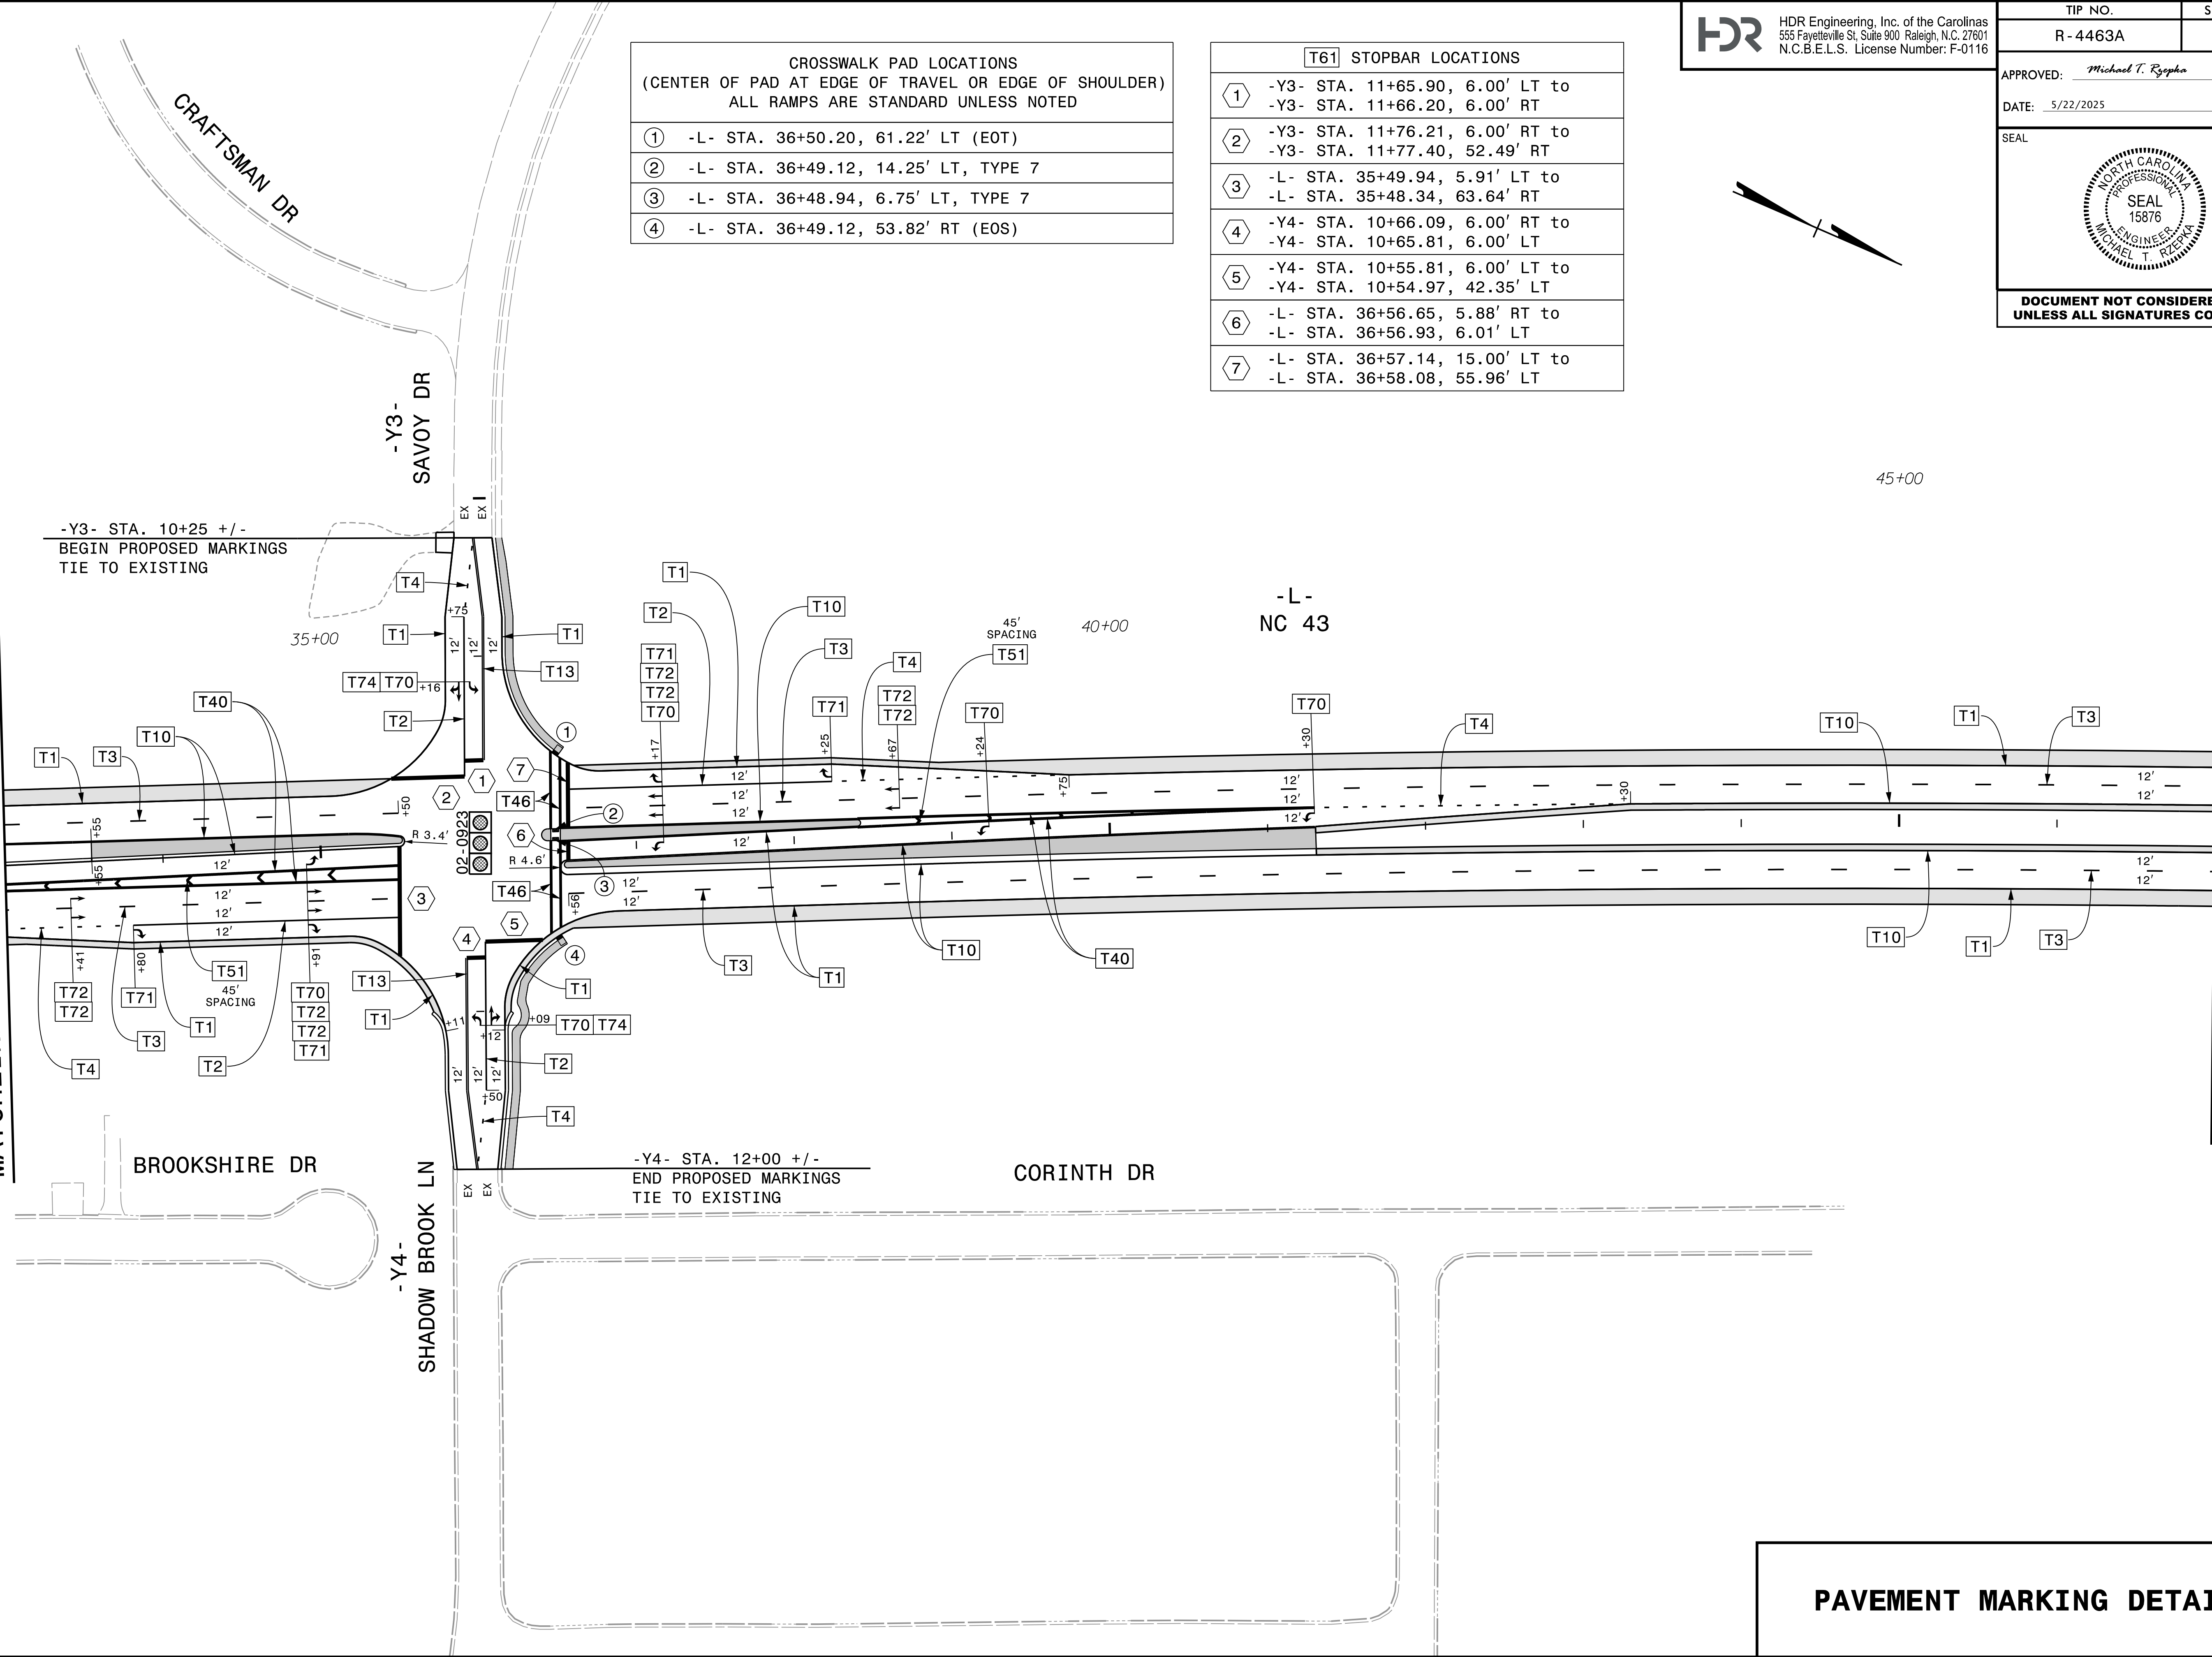

CROSSWALK PAD LOCATIONS (CENTER OF PAD AT EDGE OF TRAVEL OR EDGE OF SHOULDER) ALL RAMPS ARE STANDARD UNLESS NOTED	
①	-L- STA. 36+50.20, 61.22' LT (EOT)
②	-L- STA. 36+49.12, 14.25' LT, TYPE 7
③	-L- STA. 36+48.94, 6.75' LT, TYPE 7
④	-L- STA. 36+49.12, 53.82' RT (EOS)

T61 STOPBAR LOCATIONS	
①	-Y3- STA. 11+65.90, 6.00' LT to -Y3- STA. 11+66.20, 6.00' RT
②	-Y3- STA. 11+76.21, 6.00' RT to -Y3- STA. 11+77.40, 52.49' RT
③	-L- STA. 35+49.94, 5.91' LT to -L- STA. 35+48.34, 63.64' RT
④	-Y4- STA. 10+66.09, 6.00' RT to -Y4- STA. 10+65.81, 6.00' LT
⑤	-Y4- STA. 10+55.81, 6.00' LT to -Y4- STA. 10+54.97, 42.35' LT
⑥	-L- STA. 36+56.65, 5.88' RT to -L- STA. 36+56.93, 6.01' LT
⑦	-L- STA. 36+57.14, 15.00' LT to -L- STA. 36+58.08, 55.96' LT



HDR Engineering, Inc. of the Carolinas
555 Fayetteville St, Suite 900 Raleigh, N.C. 27601
N.C.B.E.L.S. License Number: F-0116

TIP NO.	SHEET NO.
R-4463A	PMP-4

APPROVED: *Michael T. Rzepka*
DATE: 5/22/2025

SEAL


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

MATCHLINE -L- STA. 47+00, SEE PMP-5

PAVEMENT MARKING DETAIL