


PROJECT REFERENCE NO.	SHEET NO.
R-4463A	SCP-2

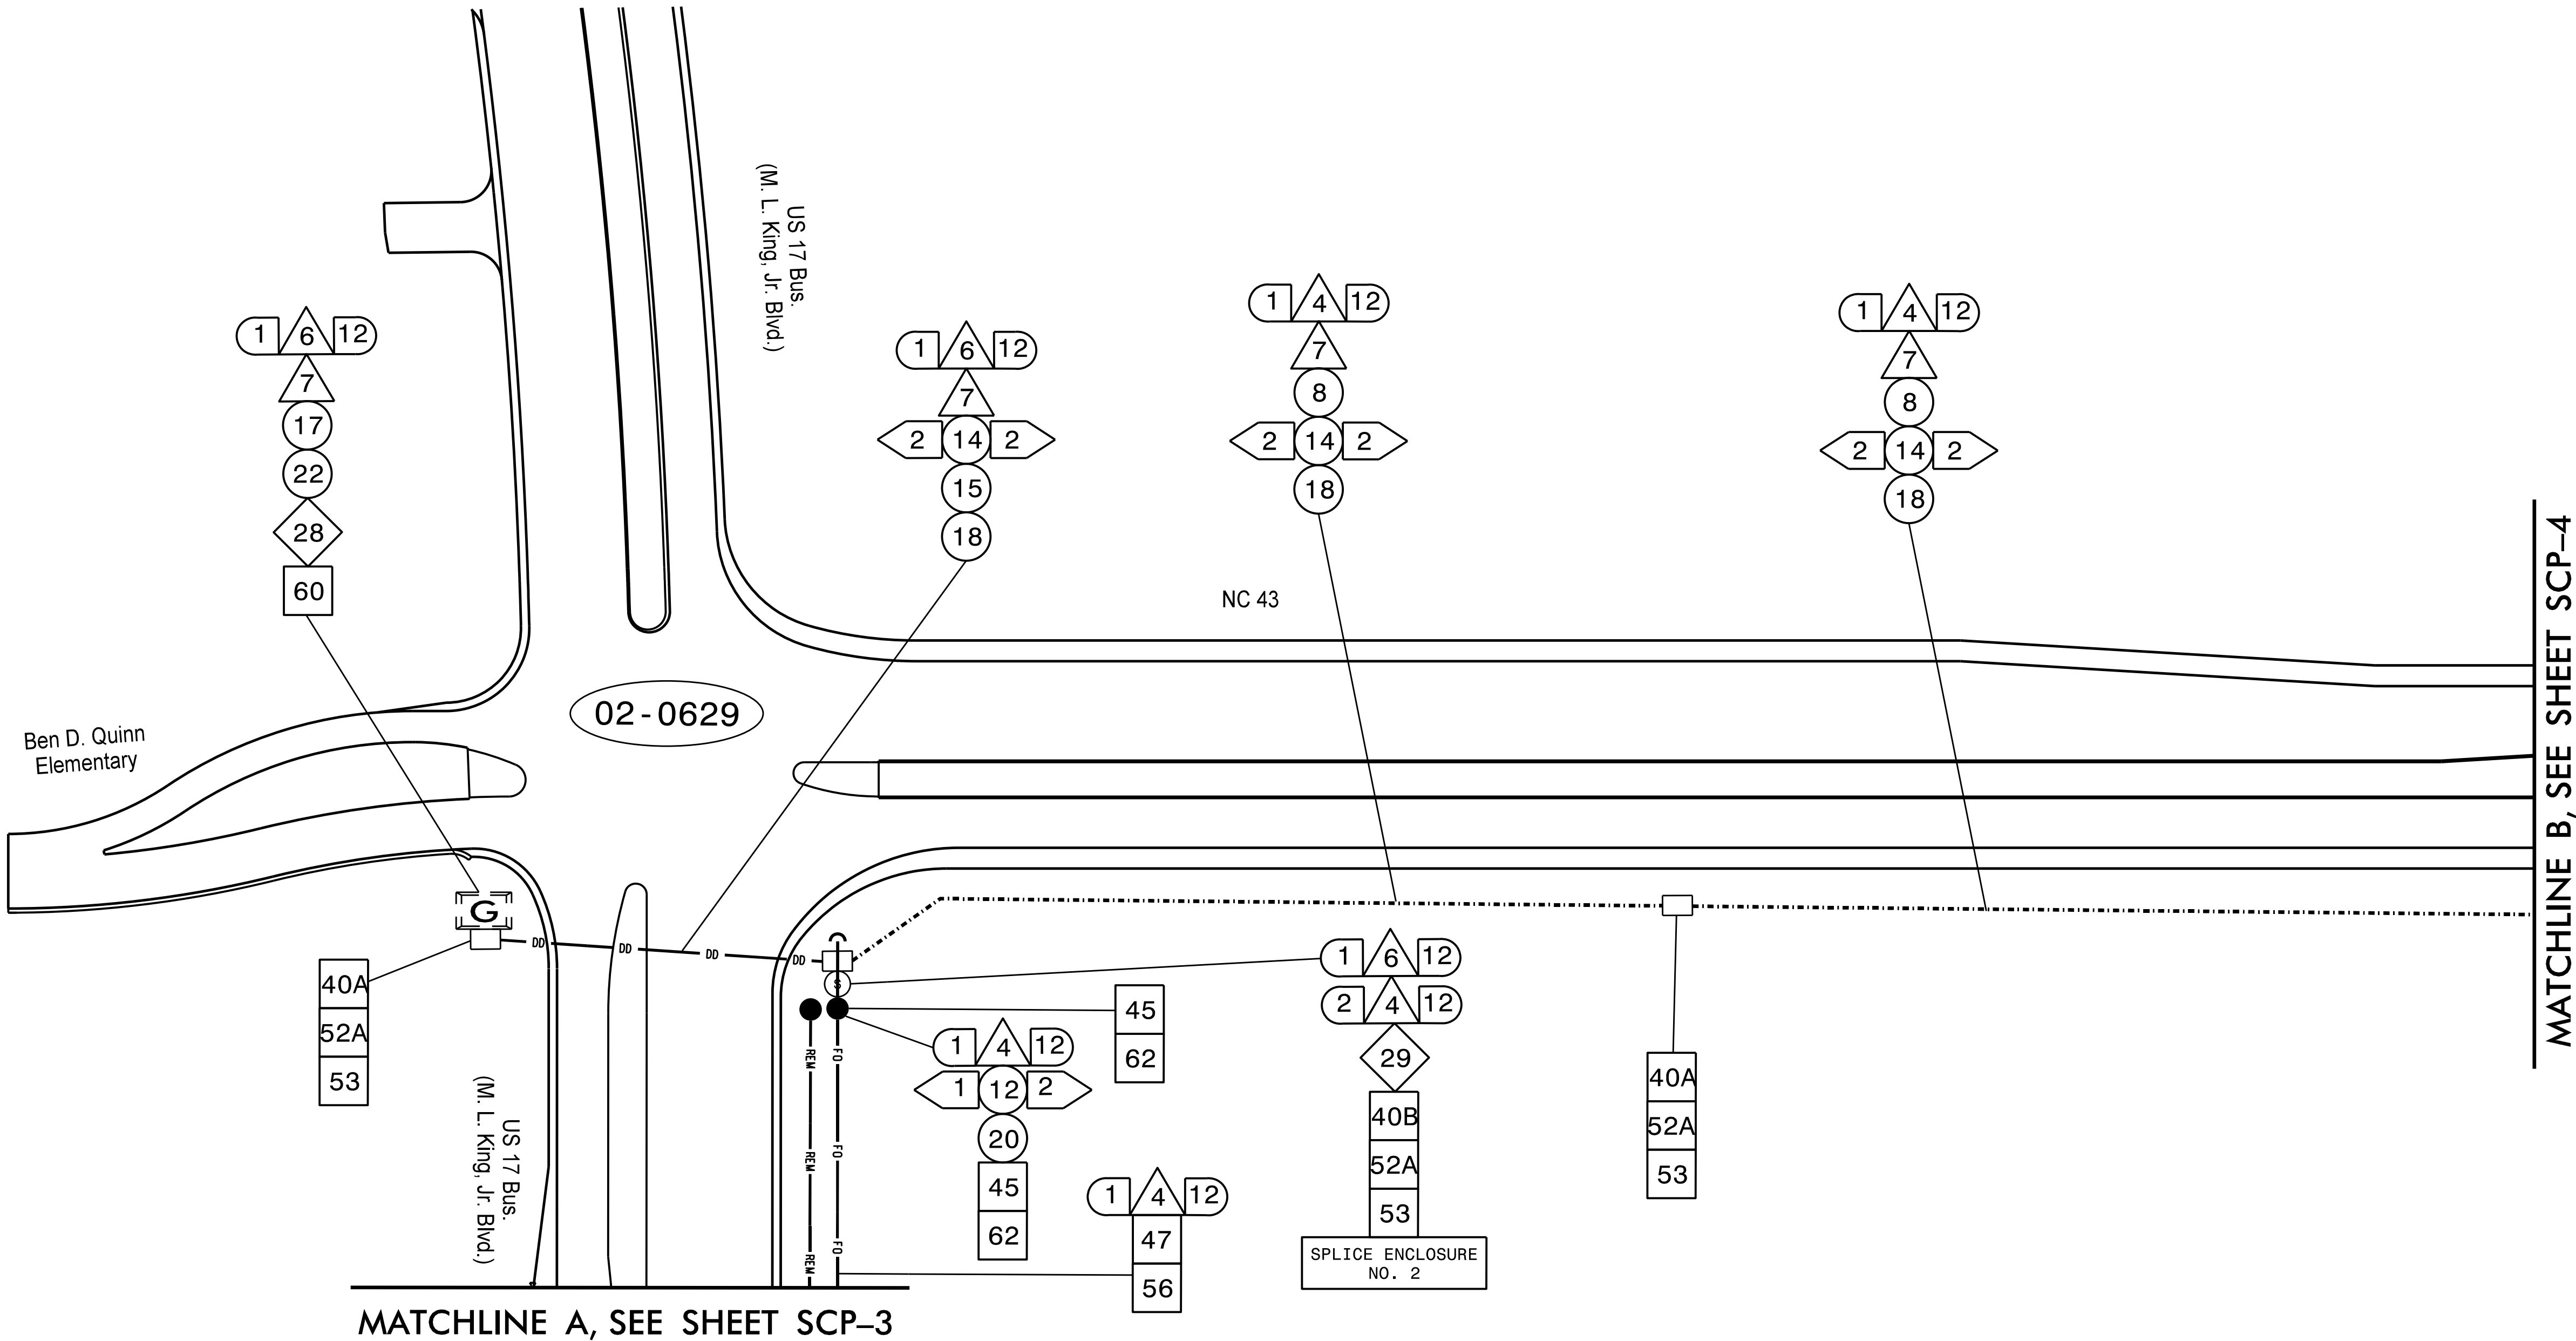

NOTES:

1) NOTIFY THE DIVISION TRAFFIC ENGINEER AT (252)439-2829 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE DIVISION TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.

2) CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.

3) PRIOR TO CUTTING AND REMOVING ANY EXISTING FIBER OPTIC CABLE, INSTALL A NEW 12-FIBER TRUNK CABLE BETWEEN THE NEW SPLICE ENCLOSURE ON SCP-3 AND THE NEW SPLICE ENCLOSURE ON SCP-2. ENSURE THE NEW 12-FIBER TRUNK LINE AND THE 12-FIBER DROP CABLE TO 02-0629 ARE INSTALLED, SPLICED AND OPERATIONAL.

4) RELOCATE EXISTING FIELD ETHERNET SWITCH AND MODEM TO NEW SIGNAL CABINET WHEN INSTALLED IN TMP PHASE 1, STEP 1.

5) ATTACH THE FIBER OPTIC CABLE AT A HEIGHT OF 28' ON THE NEW POLES.

4/23/2025
User: k.jones

Plans Prepared By:

DRMP

DRMP, Inc.
8210 University Executive Park Dr, Suite 220
Charlotte, NC 28262
NC License No. F-1524 (T04) 549-4260

Prepared For:

SEAL

750 N. Greenfield Place, Garner, NC 27529

SEAL

D02-15_New Bern Cable Routing Plans					
Division 2		Craven County		New Bern	
PLAN DATE: April 2025		REVIEWED BY: BN Groome			
PREPARED BY: DS Griffith		DRMP PROJ. NO: 17359 (041)			
REVISIONS			INIT.		DATE

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

SEAL

SEAL

Signed by:
Brittany N Groome
1E03540E184484

4/24/2025
DATE