


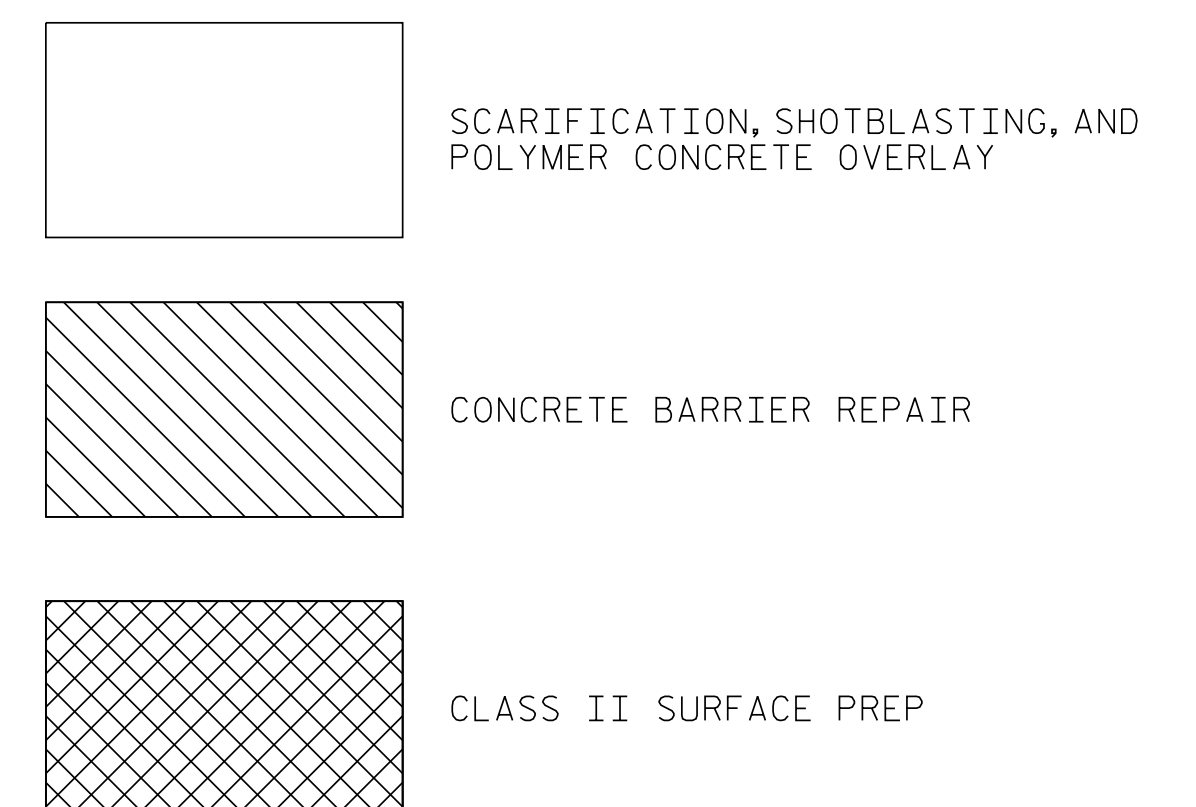

AS-BUILT QUANTITY REPAIR TABLE				
TOP OF DECK REPAIRS				
	ESTIMATE		ACTUAL	
GROOVING BRIDGE FLOORS	21385 SQ. FT.			
CLASS II SURFACE PREPARATION	54.3 SQ. YDS.			
CLASS III SURFACE PREPARATION	0 SQ. YDS.			
EPOXY RESIN INJECTION	0 LN. FT.			
POLYMER CONCRETE MATERIALS	67.9 CU. YDS.			
CONCRETE DECK REPAIR FOR PC OVERLAY	54.3 SQ. YDS.			
PLACING & FINISHING PC OVERLAY	2443.4 SQ. YDS.			
SCARIFYING BRIDGE DECK	2443.4 SQ. YDS.			
SHOTBLASTING OF BRIDGE DECK	2443.4 SQ. YDS.			
SHOTCRETE REPAIRS	ESTIMATE		ACTUAL	
	AREA SQ. FT.	VOLUME CU. FT.	AREA SQ. FT.	VOLUME CU. FT.
CONCRETE MEDIAN BARRIER	3.0	1.4		

Focus signed by
Gwen Wilson
Professional Engineer
06/27/2018

PLAN OF SPANS

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

JMT *Johnson, Mirmiran, & Thompson Inc.*
 4700 Falls of Neuse Rd, Suite 100,
 Raleigh, NC, 27609
 License No: C-3097

REVISIONS						SHEET NO. S2-76
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS 81
2			4			