Docusign Envelope ID: 7ADC4507-52B2-45A0-B0CD-819998710CDE

PROJECT REFERENCE NO.	SHEET NO.
U-4758	Sig. 8.1

18 CHANNEL IP CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

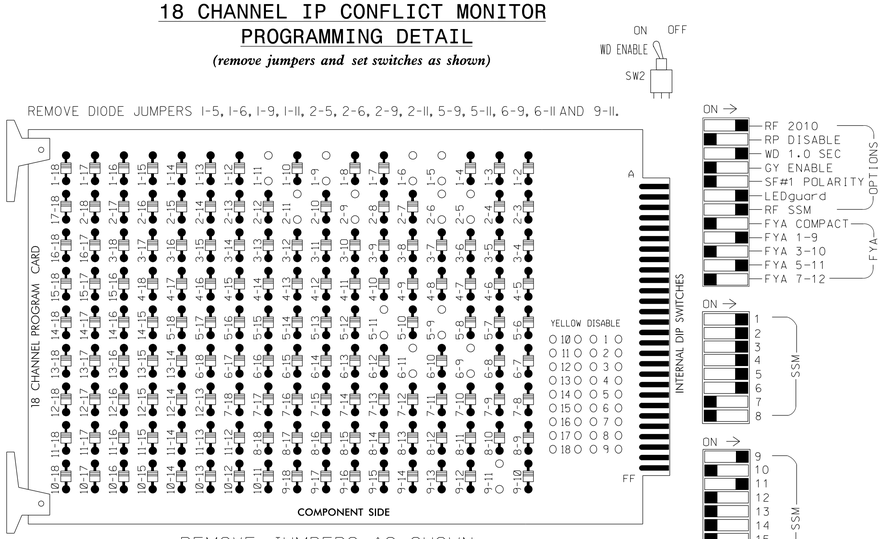

REMOVE JUMPERS AS SHOWN

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program controller to start up in phase 2 Green and 6 Green.

EQUIPMENT INFORMATION

CONTROLLER.....2070LX
CABINET.....332 W/ AUX
SOFTWARE.....ECONOLITE ASC/3-2070
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,AUX S1, AUX S4
PHASES USED.....1,2,3,4,5,6
OVERLAP "A".....*
OVERLAP "B".....NOT USED
OVERLAP "C".....*
OVERLAP "D".....NOT USED

* See overlap programming detail on sheet 2

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1		S2	S3	S4		S5		S6	S7		S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1		2	13	3		4		14	5		6	15	7	8	16	9	10	17	11	12	18
PHASE	1		2	2 PED	3		4		4 PED	5		6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11★	32	21,22	NU	31	32	41	42,43	NU	42	51★	61, 62,63	NU	NU	NU	NU	11★	NU	NU	51★	NU	NU
RED		*	128		116	116	101	101		*		134										
YELLOW			129		117	117	102	102				135										
GREEN			130		118	118	103	103				136										
RED ARROW																	A121			A114		
YELLOW ARROW		126								132							A122			A115		
FLASHING YELLOW ARROW																	A123			A116		
GREEN ARROW	127	127			118		103			133	133											

NU = Not Used

* Denotes install load resistor. See load resistor installation detail this sheet.

★ See pictorial of head wiring in detail below.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

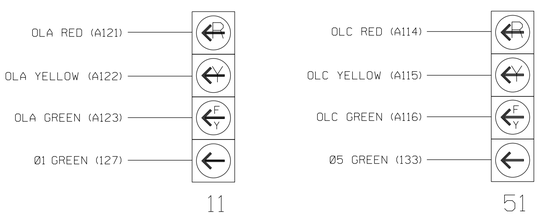

INPUT FILE POSITION LAYOUT

(front view)

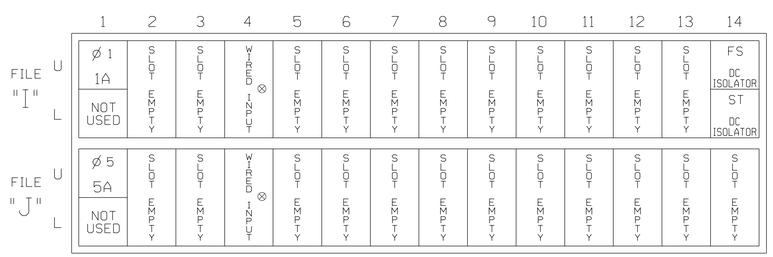

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

⊗ Wired Input - Do not populate slot with detector card

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A [1]	TB2-1,2	I1U	56	1 ★	1	YES		15.0		N
	-	J4U	48	26★	6	YES		3.0		G
5A [2]	TB3-1,2	J1U	55	5 ★	5	YES		15.0		N
	-	I4U	47	22★	2	YES		3.0		G

[1] Add jumper from I1-W to J4-W, on rear of input file.

[2] Add jumper from J1-W to I4-W, on rear of input file.

★ For the detectors to work as shown on the signal design plan. See the Vehicle Detector Setup Programming Detail for Alternate Phasing on sheet 2.

INPUT FILE POSITION LEGEND: J2L
FILE J
SLOT 2
LOWER

DETECTOR NOTES

1) Install a non-intrusive detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

2) For detection areas 1A and 5A detector card placement and slots reserved for wired inputs are typical for a NCDOT installation. Inputs associated with these slots are compatible with time of day instructions located on sheets 2 and 3 of this electrical detail.

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)

ACCEPTABLE VALUES

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)



THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-1306T1
DESIGNED: January 2025
SEALED: 03-14-2025
REVISED: N/A

Electrical Detail - Sheet 1 of 4
Temporary Design 1

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared for the Offices of:
Transportation Mobility and Safety Division
Signal Management Section
750 N.Greenfield Pkwy,Garner,NC 27529

SR 1850 (Sandy Ridge Road)
at
SR 1818 (Johnson Street)/
Bloomfield Trail

Division 7 Guilford County High Point

PLAN DATE:	January 2025	REVIEWED BY:	AW Encarnacion
PREPARED BY:	JT Stiff	REVIEWED BY:	PL Alexander

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 044476 ENGINEER ANTHONY M. ENCARNACION

DocuSigned by: Anthony Encarnacion 3/14/2025
DESIGNER SIGNATURE DATE

SIG. INVENTORY NO. 07-1306T1

AtkinsRéalis
1616 EAST MILLBROOK ROAD, SUITE 160
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBEES #F-0326

13-MAR-2025 15:15
pw:/SUSD036343:wsatkins.com:ATKNANCO1/Documents/Roads and Bridges/Projects/100059632 JSSR Sig and ITS/Task 05.11.Signals/07130611_sm_ele.2023mmdd.dgn
STIF4685 AT LUS491089