PROJECT REFERENCE NO.	SHEET NO.
NC-9	UO-4
THIS SHEET CORRESPONDS TO RDY- 4	

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY CONDUIT SHOWN ON THIS SHEET TO BE INSTALLED BY THE CONTRACTOR IN CONJUNCTION WITH THE UTILITY COMPANIES PER NCDOT's DIRECTION.

ALL PROPOSED UTILITY RISER POLES AND OVERHEAD LINEWORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS. NO PAYMENT WILL BE MADE TO THE CONTRACTOR FOR UTILITY WORK.

Weston & Sampson
WSE of North Carolina, PC
2052 Energy Drive
Phone: 919.297.0220
NC License: C-4647
Apex, NC 27502
westonandsampson.com

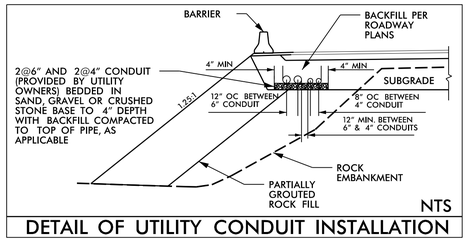

DETAIL OF UTILITY CONDUIT INSTALLATION

NAD 83

DUKE, AT&T, & SPECTRUM OH LINES TO PROP JOINT USE POLES; PRIMARY UG SPLICE PIT

PROP UG CONDUITS (2) 6" POWER (2) 4" TELECOM

DUKE, AT&T, & SPECTRUM OH LINES TO PROP JOINT USE POLE

DUKE, AT&T, & SPECTRUM OH LINES TO EXIST JOINT USE POLE

DUKE PROP UG CONDUITS (2)

SPECTRUM & AT&T PROP UG CONDUITS (1 EACH PER UTILITY)

AVOID COVERING EXISTING INLET W/FILL SLOPE

BEGIN PROJECT NC-9
-L- STA 10+12.00

MATCHLINE -L- STA 21+00
SEE SHEET UO-5

J:\Division 14\2019 Helene Stantec\Utilities\Coordination\UBO\Proj\NC-9_UO_psh04.dgn
6/3/2025
10:31 AM