Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN

SURRY COUNTY

LOCATION: INTERSECTION IMPROVEMENTS AT NC 89 (W. PINE ST)
AND SR 1397 (ROUND PEAK CHURCH RD/OAK GROVE CHURCH RD)

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.10	TYPE 'A' SIGNS
901.20	TYPE 'B' SIGNS
901.50	ARROWS AND SHIELDS
901.70	SIGN STRINGERS AND SUPPORT SPACING
901.80	SIGN MOUNTING DETAILS - FOR TYPE A AND TYPE B SIGNS
902.10	FOUNDATIONS FOR GROUND MOUNTED SIGNS
903.10	GROUND MOUNTED SIGN SUPPORTS
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE `D', `E' AND `F' SIGNS ON `U' CHANNEL POSTS
910.40	SINGLE LANE ROUNDABOUT WITH PEDESTRIAN
1205.13	LANE REDUCTIONS

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	SUPPORT INFORMATION
SIGN-3A-B	SIGN DESIGNS
SIGN-4	"E" TYPE SIGNS
SIGN-5	"F" TYPE SIGNS
SIGN-6	EXISTING SIGN PLAN SHEET
SIGN-7	PROPOSED SIGN PLAN SHEET

SUMMARY OF QUANTITIES

ITEM NO. DESC. NO.	ITEM NO. SECT. NO.	ITEM DESCRIPTION	QUANTITY	UNIT
4025000000	901	CONTRACTOR FURNISHED, TYPE D SIGN	60	S.F.
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	257	S.F.
4025000000	901	CONTRACTOR FURNISHED, TYPE F SIGN	50	S.F.
4048000000	902	REINFORCED CONCRETE SIGN FOUNDATION	1	C.Y.
4054000000	902	PLAIN CONCRETE SIGN FOUNDATION	1	C.Y.
4060000000	903	SUPPORTS, BREAKAWAY STEEL BEAM	1100	LB.
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	1071	L.F.
4080200000	903	SUPPORTS, STEEL SQUARE TUBE	9	L.F.
4096000000	904	SIGN ERECTION, TYPE D	6	EA.
4102000000	904	SIGN ERECTION, TYPE E	47	EA.
4108000000	904	SIGN ERECTION, TYPE F	4	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE A (GROUND MOUNTED)	1	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE B (GROUND MOUNTED)	1	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED)	10	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE F (GROUND MOUNTED)	1	EA.
4138000000	907	DISPOSAL OF SUPPORT, STEEL BEAM	2	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	25	EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	10	EA.

GENERAL NOTES

. SIGNS FURNISHED BY CONTRACTOR.

. ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.

. IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.

. WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER

. ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.

. WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.

. THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.

. DO NOT BEGIN FABRICATION FOR TYPES A & B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL "S" DIMENSIONS HAVE BEEN FIELD VERIFIED.

. SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

PROJECT NOTES

1 DISPOSAL OF SUPPORT, STEEL BEAM
2 DISPOSAL OF SUPPORT, U-CHANNEL
3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
4 SIGN ERECTION, TYPE D, E, AND F
5 SIGN ERECTION, RELOCATE SIGN TYPE A (GROUND MOUNTED)
6 SIGN ERECTION, RELOCATE SIGN TYPE B (GROUND MOUNTED)
7 SIGN ERECTION, RELOCATE SIGN TYPE D
8 SIGN ERECTION, RELOCATE SIGN TYPE F

PLANS SUBMITTED TO: N.C.D.O.T. DIVISION ELEVEN

CHRIS J. BROWN DIVISION ELEVEN TRAFFIC ENGINEER

PLANS PREPARED BY: KCA

CRAIG C. SINGER, PE PROJECT ENGINEER
EVAN P. HELMS, EI PROJECT DESIGNER

R-5901
SIGN 1

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by: Craig Singer

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES
NC FIRM LICENSE No: C-1506
301 Fayetteville Street, Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS

T.I.P.: R-5901

CONTRACT: C205099

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

SIGN					ROADWAY	NUMBER	BEAM	SUPPORT	OMNI	ATTACHMENT	MOUNTING	HORIZONTAL	SUPPORT	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			SUPPORT WEIGHTS		FOOTINGS				FIELD
		SIZE (in.)												SNS HT	MTG HT	EMBED-										B/A	SIMPLE	DIAMETER	DEPTH	REINFORCED	PLAIN	VERIFIED
NUMBER	TYPE	w	x	h	STATION	OF SUPPORTS	SECTION	TYPE BA or S	COUPLER	METHOD	METHOD	CLEARANCE* (ft.)	SPACING	"H"	"C"	MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	(lbs.)	(lbs.)	(ft.)	(ft.)	(c.y.)	(c.y.)	SEE NOTE 2 (mm/dd/yy)
901	A	192	x	120	15+34	2	W6x16	BA	N/A	N/A	N/A	18.00	9.38	10.00	7.00	4.5	3.41	20.41	24.91	0.00	0.00	0.00	2.35	19.35	23.85	874.16	0	1.5	5	0.65	0.00	
902	B	120	x	36	18+06	2	S3x5.7	BA	N/A	N/A	N/A	18.00	5.86	3.00	7.00	2.5	2.18	12.18	14.68	0.00	0.00	0.00	3.15	13.15	15.65	208.90	0	1.0	3	0.00	0.17	

	TOTAL	TOTAL		TOTAL	TOTAL
	1083.06	0.00		0.65	0.17
USE:	1084.00	0.00		1.00	1.00

NOTES

1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
2. FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

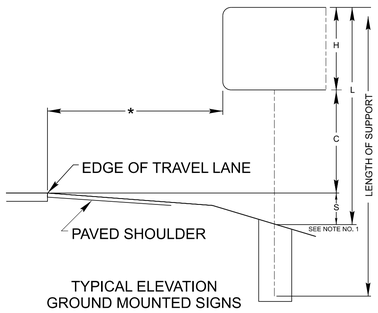

TYPICAL ELEVATION
GROUND MOUNTED SIGNS

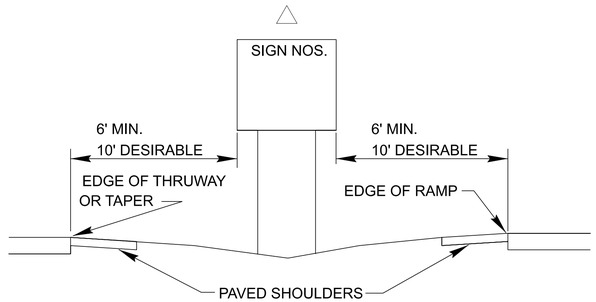

R-5901

SIGN 2

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by:
Craig Singer
3980A1F4E1C4...

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES

NC FIRM LICENSE No: C-1506
301 Fayetteville Street,
Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

SIGN NUMBER: 301 | BACKG COLOR: Green | COPY COLOR: White
TYPE: D
QUANTITY: 1
SIGN WIDTH: 4′-6″
HEIGHT: 1′-6″
TOTAL AREA: 6.75 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.75″
NO. Z BARS:
LENGTH:

SYMBOL	X	Y	WID	HT
AR_Type D	6.93	4.5	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: C. FORD | CHECKED BY: N. RUSSIN | May 28, 2025
PROJECT ID: R-5901 | LOCATION: -L1- STA. 14+25± | DIV: 11



USE NOTES:
1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

									Series/Size Text Length
	M	t		A	i	r	y		D 2000
17.92	5.46	2.46	6.18	5.88	2.16	2.52	4.5	6.92	29.16

FILENAME: R5901_SGN_GS

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 302 | BACKG COLOR: Green | COPY COLOR: White
TYPE: D
QUANTITY: 1
SIGN WIDTH: 4′-6″
HEIGHT: 2′-6″
TOTAL AREA: 11.25 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 2.25″
NO. Z BARS:
LENGTH:

SYMBOL	X	Y	WID	HT
AR_FISHOOK	4.89	16.98	9.9	10.8
AR_Type D	40.08	4.62	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: C. FORD | CHECKED BY: N. RUSSIN | May 08, 2025
PROJECT ID: R-5901 | LOCATION: -Y2- STA. 15+17± | DIV: 11



USE NOTES:
1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

									Series/Size Text Length
	L	o	w	g	a	p			D 2000
20.79	4.26	4.14	7.26	4.5	4.56	3.6	4.89		28.32
	M	t		A	i	r	y		D 2000
4.92	5.46	2.46	6.18	5.88	2.16	2.52	4.5	19.92	29.16

FILENAME: GSWKSP01

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 303 | BACKG COLOR: Green | COPY COLOR: White
TYPE: D
QUANTITY: 1
SIGN WIDTH: 4′-0″
HEIGHT: 1′-6″
TOTAL AREA: 6 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.75″
NO. Z BARS:
LENGTH:

SYMBOL	X	Y	WID	HT
AR_Type D	3.84	4.5	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: C. FORD | CHECKED BY: N. RUSSIN | May 28, 2025
PROJECT ID: R-5901 | LOCATION: -L2- STA. 14+46± | DIV: 11



USE NOTES:
1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

								Series/Size Text Length
	L	o	w	g	a	p		D 2000
15.85	4.26	4.14	7.26	4.5	4.56	3.6	3.84	28.32

FILENAME: R5901_SGN_GS

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 304 | BACKG COLOR: Green | COPY COLOR: White
TYPE: D
QUANTITY: 1
SIGN WIDTH: 4′-6″
HEIGHT: 2′-6″
TOTAL AREA: 11.25 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 2.25″
NO. Z BARS:
LENGTH:

SYMBOL	X	Y	WID	HT
AR_FISHOOK	4.48	16.98	9.9	10.8
AR_Type D	39.66	4.62	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: C. FORD | CHECKED BY: N. RUSSIN | May 08, 2025
PROJECT ID: R-5901 | LOCATION: -Y1- STA. 10+15± | DIV: 11



USE NOTES:
1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

									Series/Size Text Length
	M	t		A	i	r	y		D 2000
20.37	5.46	2.46	6.18	5.88	2.16	2.52	4.5	4.48	29.16
	L	o	w	g	a	p			D 2000
5.34	4.26	4.14	7.26	4.5	4.56	3.6	20.34		28.32

FILENAME: GSWKSP01

NORTH CAROLINA D.O.T. SIGN DETAIL

R-5901
SIGN 3A

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by: Craig Singer

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES
NC FIRM LICENSE No: C-1506
301 Fayetteville Street, Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIGN DESIGNS

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

SIGN NUMBER: 305
TYPE: D
QUANTITY: 1
SIGN WIDTH: 6′-0″
HEIGHT: 2′-0″
TOTAL AREA: 12 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.75″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type D	55.86	8.42	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

DESIGN BY: C. FORD
PROJECT ID: R-5901
CHECKED BY: N. RUSSIN
LOCATION: -Y2- STA. 10+85±
May 08, 2025
DIV: 11

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

												Series/Size Text Length
		O	a	k		G	r	o	v	e		D 2000
	9.06	5.16	4.56	3.96	6.6	5.28	2.76	4.14	4.74	3.54	22.2	40.74
		C	h	u	r	c	h		R	d		D 2000
	9	5.28	4.62	4.74	2.76	4.32	4.08	6.72	4.74	3.6	22.14	40.86

FILENAME: GSWKSP01

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 306
TYPE: D
QUANTITY: 1
SIGN WIDTH: 6′-0″
HEIGHT: 2′-0″
TOTAL AREA: 12 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.75″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type D	58.68	8.42	6	9

MAT'L: 0.125″ (3.2 mm) ALUMINUM

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

DESIGN BY: C. FORD
PROJECT ID: R-5901
CHECKED BY: N. RUSSIN
LOCATION: -Y1- STA. 16+77±
May 08, 2025
DIV: 11



Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

												Series/Size Text Length
		R	o	u	n	d		P	e	a	k	D 2000
	6.18	4.74	4.56	4.74	4.44	4.2	6.72	4.62	4.08	4.56	3.84	19.32	46.5
		C	h	u	r	c	h		R	d		D 2000
	9	5.28	4.62	4.74	2.76	4.32	4.08	6.72	4.74	3.6	22.14	40.86

FILENAME: GSWKSP01

NORTH CAROLINA D.O.T. SIGN DETAIL

R-5901
SIGN 3B

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by:
Craig Singer
3980A2F4B4E4E4...

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES

NC FIRM LICENSE No: C-1506
301 Fayetteville Street, Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIGN DESIGNS

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

401 QUANTITY REQ'D 3

24" X 30"
R2-1

ONE "U" POST PER SIGN

402 QUANTITY REQ'D 4

30" X 30"
W2-6

ONE "U" POST PER SIGN
MOUNT ABOVE SIGN 403
IN 4 INSTALLATIONS

403 QUANTITY REQ'D 4

18" X 18"
W13-1P

MOUNT BELOW SIGN 402
IN 3 INSTALLATIONS
MOUNT BELOW SIGN 402 & ABOVE SIGN 416
IN 1 INSTALLATION

404 QUANTITY REQ'D 4



30" X 30"
W3-2

ONE "U" POST PER SIGN

405 QUANTITY REQ'D 3

30" X 30"
R1-1

ONE "U" POST PER SIGN
MOUNT BELOW SIGN 411 & ABOVE SIGN 417
IN 1 INSTALLATION

406 QUANTITY REQ'D 1



36" X 36"
W4-2

ONE "U" POST PER SIGN

407 QUANTITY REQ'D 1

42" X 30"
R5-1a

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 1

36" X 36"
R5-1

ONE "U" POST PER SIGN

409 QUANTITY REQ'D 1

30" X 30"
W14-1

ONE "U" POST PER SIGN

410 QUANTITY REQ'D 8



36" X 36" X 36"
R1-2

ONE "U" POST PER SIGN
MOUNT ABOVE SIGN 414
IN 4 INSTALLATIONS

411 QUANTITY REQ'D 6



36" X 12"
R6-1R

ONE "U" POST PER SIGN
MOUNT ABOVE SIGN 405
IN 1 INSTALLATION
MOUNT ABOVE SIGN 412
IN 4 INSTALLATIONS

412 QUANTITY REQ'D 8



18" X 18"
OM1-3

MOUNT BELOW SIGN 411
IN 4 INSTALLATIONS
MOUNT BELOW SIGN 413
IN 4 INSTALLATIONS

413 QUANTITY REQ'D 4

24" X 30"
R4-7

ONE "U" POST PER SIGN
MOUNT ABOVE SIGN 412
IN 4 INSTALLATIONS

414 QUANTITY REQ'D 4

30" X 30"
R6-5P

MOUNT BELOW SIGN 410
IN 4 INSTALLATIONS

415 QUANTITY REQ'D 1

36" X 36"
W9-1

ONE "U" POST PER SIGN

416 QUANTITY REQ'D 1

24" X 12"
W16-2aP

MOUNT BELOW SIGN 403
IN 1 INSTALLATION

417 QUANTITY REQ'D 1

30" X 36"
R3-5R

MOUNT BELOW SIGN 405
IN 1 INSTALLATION

TYPE "E" SIGNS

R-5901
SIGN 4

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by:
Craig Singer
3582B1F...

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES

NC FIRM LICENSE No: C-1506
301 Fayetteville Street, Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

(501) QUANTITY REQ'D 1

21" X 15" M2-1P

24" X 24" M1-1

ONE "U" POST PER SIGN

(502) QUANTITY REQ'D 1

24" X 12" M4-5P

24" X 12" M3-1P

24" X 24" M1-1

21" X 15" M6-3P

24" X 12" M3-3P

24" X 24" M1-1

21" X 15" M6-1P

TWO "U" POSTS PER SIGN

(503) QUANTITY REQ'D 1

24" X 12" M3-4P

24" X 24" M1-5

21" X 15" M6-2P

ONE "U" POST PER SIGN

(504) QUANTITY REQ'D 1

24" X 12" M3-2P

24" X 24" M1-5

21" X 15" M6-2P



24" X 12" M4-5P

24" X 24" M1-1

21" X 15" M6-2P

TWO "U" POSTS PER SIGN

TYPE "F" SIGNS

R-5901

SIGN 5

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by:
Craig Singer
3981B7F4C...

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO
& ASSOCIATES
NC FIRM LICENSE No: C-1506
301 Fayetteville Street,
Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

NAD 83/2011

SEE NOTE 3
SR 1397 (ROMAN PEAK CHURCH RD)
STOP
SEE NOTE 3
SR 1614 (RICHARDS RD)
SEE NOTE 3
DEAD END
RICHARDS RD
ROUND PEAK CH RD
SEE NOTES 2 & 7
SEE NOTE 3
ROUND PEAK CH RD
W PINE ST
SEE NOTES 2 & 7
NC BYWAY
Yadkin Valley
BEGIN
CEDAR RIDGE ELEM SCHOOL
SEE NOTES 2 & 7
SEE NOTES 2 & 8
TO
1.4 MI
ROUND PEAK VINEYARDS TOURS
SEE NOTES 2 & 7
SEE NOTE 3
SEE NOTES 1 & 5
TRUCKERS WARNING
WEST
89
THRU TRUCKS PROHIBITED FROM I-77 TO VIRGINIA LINE
SPEED LIMIT 45
SEE NOTE 3
SEE NOTE 3
25' FROM -L- STA. 24+90
SEE NOTE 3
LEFT LANE ENDS
SEE NOTE 3
STOP
SEE NOTE 3
NC 89 (W PINE ST)
NC 89 (W PINE ST)
SEE NOTE 3
SPEED LIMIT 45
SEE NOTE 3
STOP
SEE NOTE 3
SEE NOTES 2 & 7
ING SCENIC BWAY
SEE NOTES 2 & 7
SEE NOTES 2 & 7
NC SCENIC BYWAY
SEE NOTE 3
W PINE ST
SEE NOTE 3
IRONING BOARD VINEYARDS TOURS
1.1 MI
SEE NOTES 2 & 7
BOTTOMLEY FAMILY
HIGHWAY
ADOPT
SEE NOTES 2 & 7
STOP
SEE NOTE 3
SR 1397 (OAK GROVE CHURCH RD)
SEE NOTE 3
SPEED LIMIT 45
SEE NOTE 3
35 MPH
SEE NOTE 3
SEE NOTE 3
SEE NOTE 3

Docusign Envelope ID: 8F4D40B4-D81B-491C-A98F-0736EB457DBF

5/26/20

NAD 83/2011

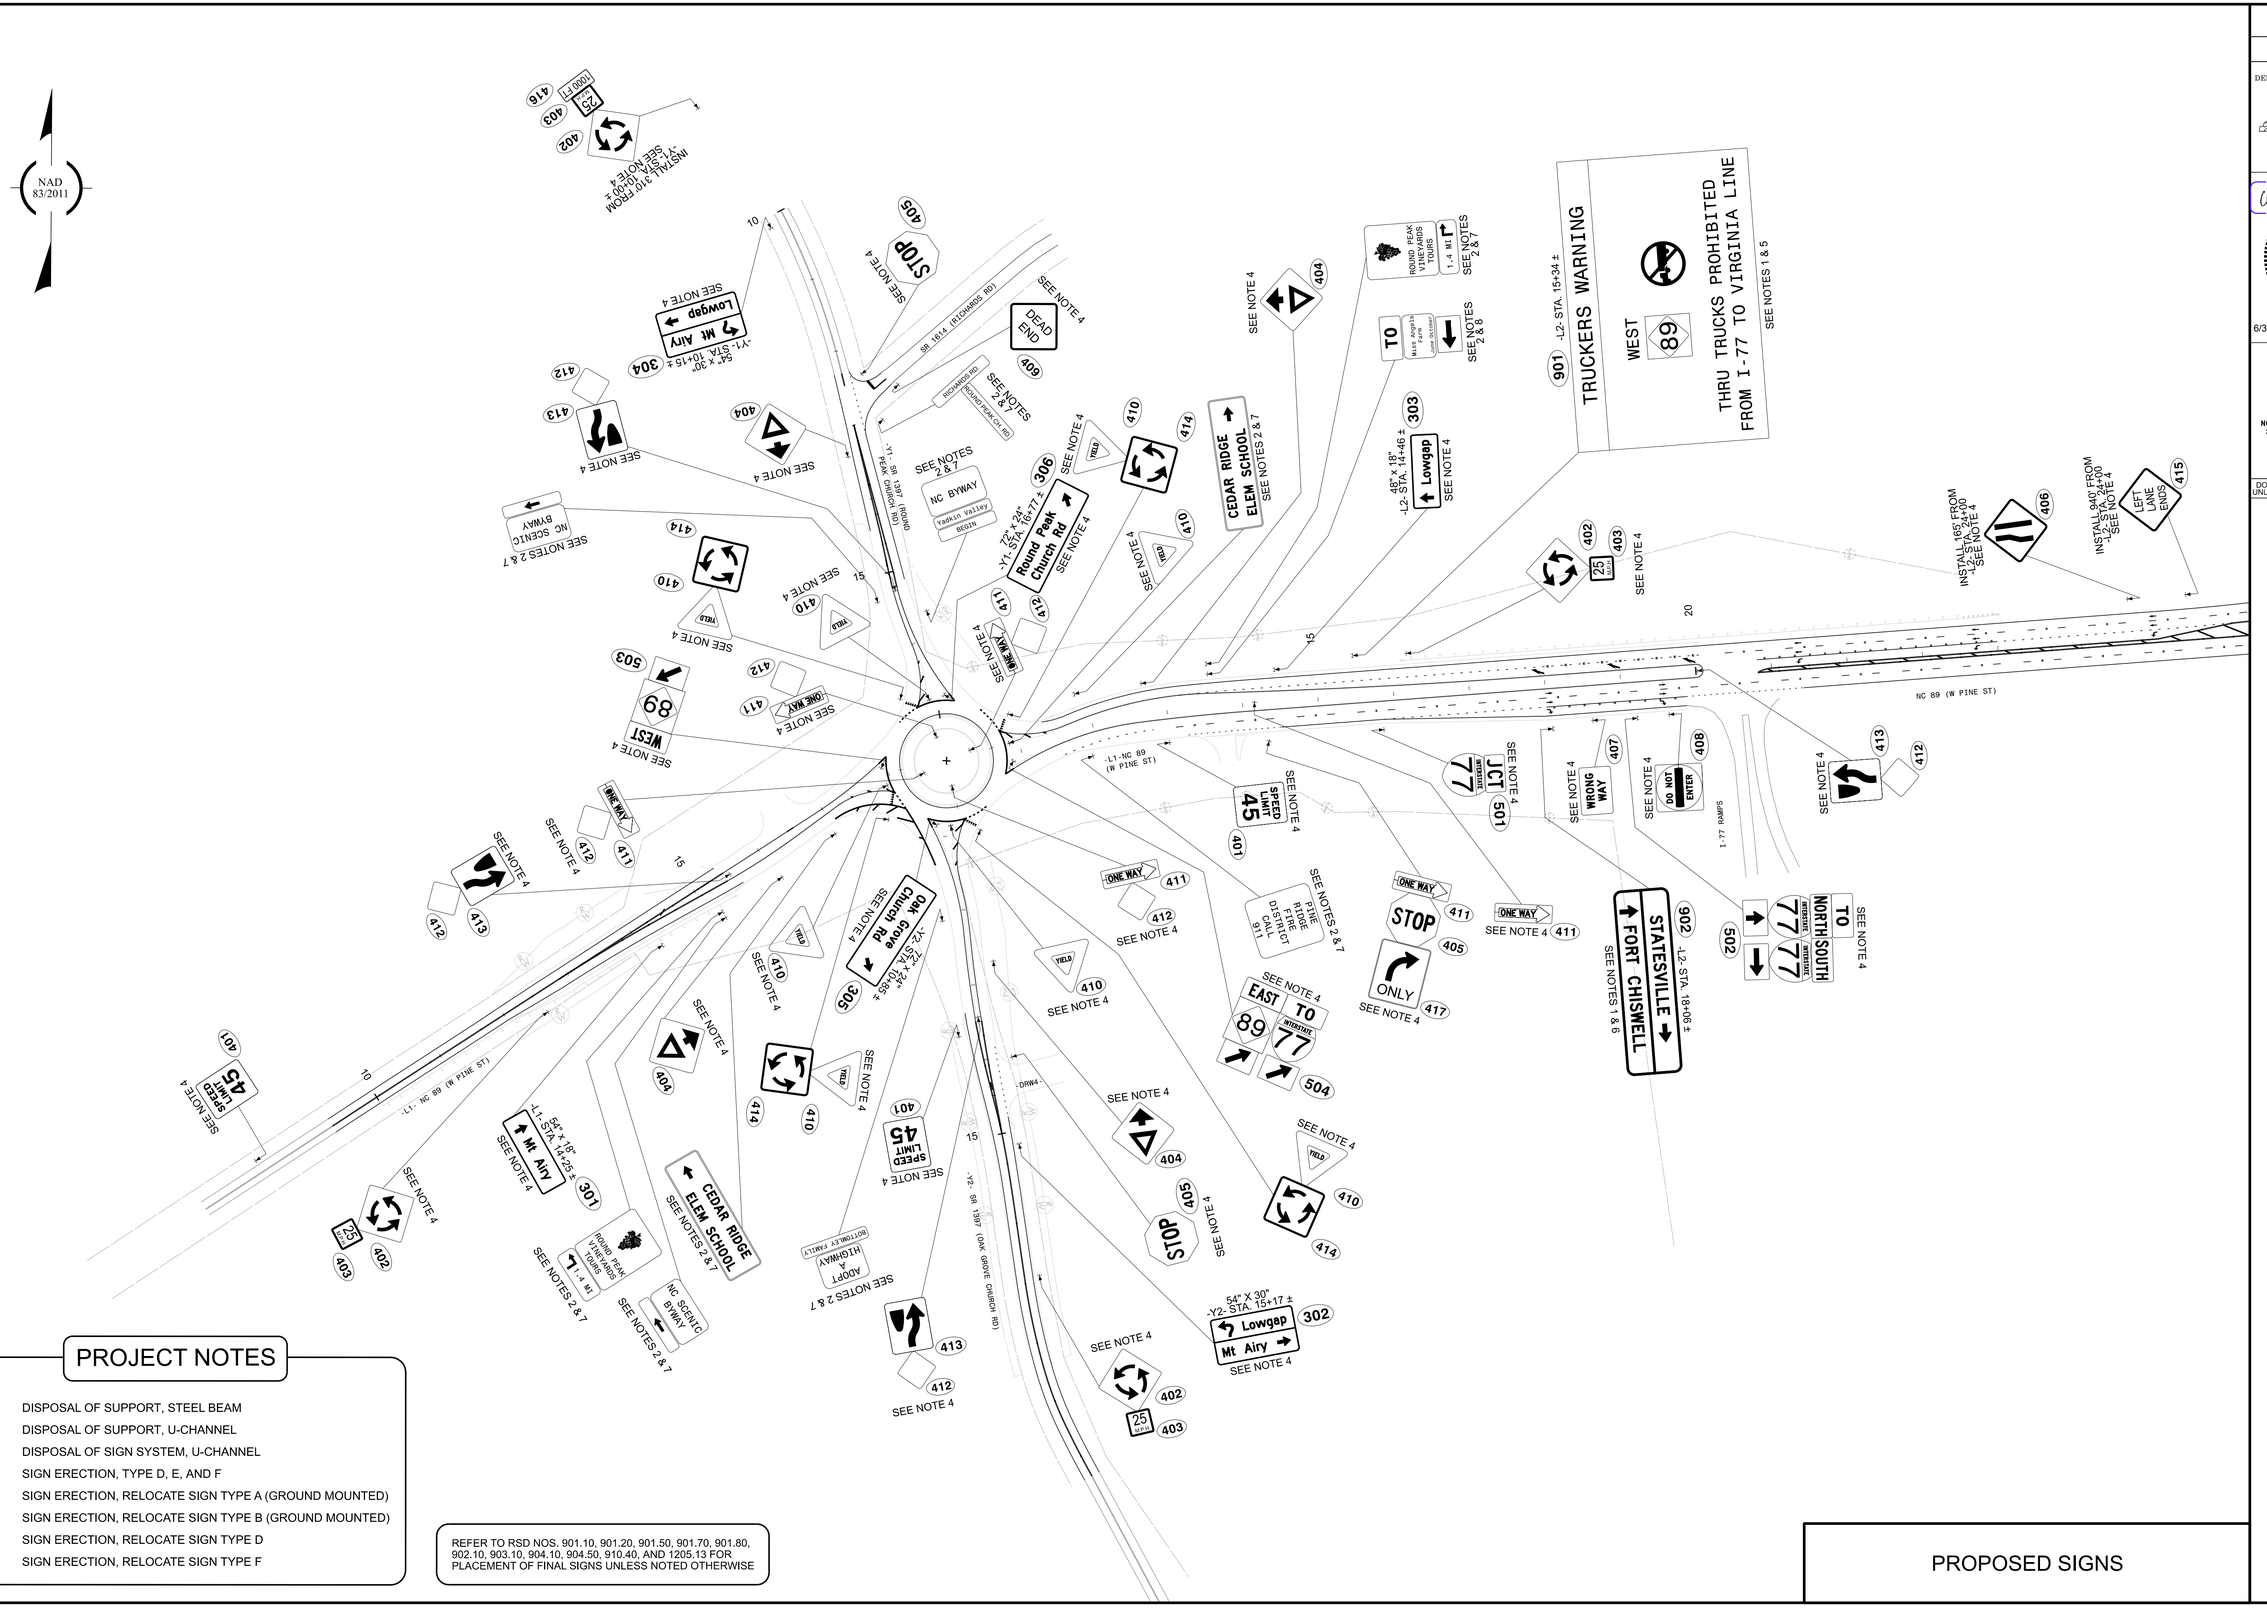

PROJECT NOTES

1. DISPOSAL OF SUPPORT, STEEL BEAM
2. DISPOSAL OF SUPPORT, U-CHANNEL
3. DISPOSAL OF SIGN SYSTEM, U-CHANNEL
4. SIGN ERECTION, TYPE D, E, AND F
5. SIGN ERECTION, RELOCATE SIGN TYPE A (GROUND MOUNTED)
6. SIGN ERECTION, RELOCATE SIGN TYPE B (GROUND MOUNTED)
7. SIGN ERECTION, RELOCATE SIGN TYPE D
8. SIGN ERECTION, RELOCATE SIGN TYPE F

REFER TO RSD NOS. 901.10, 901.20, 901.50, 901.70, 901.80, 902.10, 903.10, 904.10, 904.50, 910.40, AND 1205.13 FOR PLACEMENT OF FINAL SIGNS UNLESS NOTED OTHERWISE

PROPOSED SIGNS

R-5901

SIGN 7

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
SURRY COUNTY

HIGHWAY DIVISION 11

Signed by:
Craig Singer
3980E8A7F4E1...

NORTH CAROLINA PROFESSIONAL SEAL 057013 ENGINEER CRAIG C SINGER

6/30/2025

PREPARED BY

KCA
KISINGER CAMPO & ASSOCIATES

NC FIRM LICENSE No: C-1506
301 Fayetteville Street,
Suite 1500
Raleigh, NC 27601
(919)882-7839

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED