

6/14/2025
\\TCR\B5614_SGN_PMP01.dgn
USER:edfoul

CONTRACT: C204711

TIP: B-5614

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
BEAUFORT COUNTY

INDEX

SHEET NO.	DESCRIPTION
PMP-1	INDEX, ROADWAY STANDARD DRAWINGS, PAVEMENT MARKING SCHEDULE, GENERAL NOTES
PMP-2 THRU PMP-3	PAVEMENT MARKING DETAILS

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -
N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C.,
DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE
CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS
1205.04	PAVEMENT MARKINGS - INTERSECTIONS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF
THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN,
OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE
AS FOLLOWS:

ROAD NAME	MARKING	MARKER
-L- (MOUTH OF THE CREEK RD.)	THERMOPLASTIC	NONE
-Y1-	THERMOPLASTIC	NONE
BRIDGE	COLD APPLIED PLASTIC	NONE


- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
- D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY
THE ENGINEER.
- E) STOP BAR LOCATION AT NON-SIGNALIZED INTERSECTIONS MAY BE ADJUSTED AS
DIRECTED BY THE ENGINEER.
- F) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON
CONCRETE BRIDGE DECKS PRIOR TO PLACING COLD APPLIED PLASTIC PAVEMENT
MARKING MATERIAL.
- G) UNLESS OTHERWISE SPECIFIED, HEATED-IN-PLACE THERMOPLASTIC MAY BE USED
IN LIEU OF EXTRUDED THERMOPLASTIC FOR STOP BARS, SYMBOLS, CHARACTERS
AND DIAGONALS. IF HEATED-IN-PLACE IS USED, IT SHALL BE PAID FOR USING
THE EXTRUDED THERMOPLASTIC PAY ITEM.

PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION
C1	COLD APPLIED PLASTIC WHITE EDGELINE (4")
C13	COLD APPLIED PLASTIC YELLOW DOUBLE CENTER (4")
T1	THERMOPLASTIC WHITE EDGELINE (4", 90 MIL)
T5	THERMOPLASTIC 2 FT. - 6 FT./SP WHITE MINISKIP (4", 90 MIL)
T13	THERMOPLASTIC YELLOW DOUBLE CENTER (4", 90 MIL)
T61	THERMOPLASTIC WHITE STOPBAR (24", 90 MIL)


PLAN SUBMITTED TO:



DAVID M. EATON, PE	SIGNING AND DELINEATION REGIONAL ENGINEER
MATTHEW TRACEY, PE	SIGNING AND DELINEATION PROJECT DESIGN ENGINEER

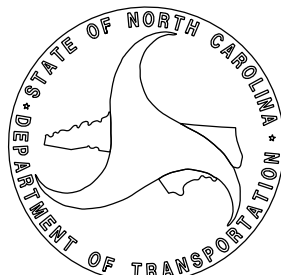


PLAN PREPARED BY: STEWART

DAVID RUGGLES, PE	PROJECT ENGINEER
AMJAD IBRAHIM, PE	PROJECT DESIGN ENGINEER

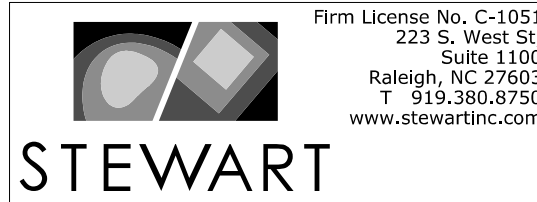

TIP NO.	SHEET NO.
B-5614	PMP - 1
APPROVED:  C462768DF412422...	
DATE: 6/12/2025	
SEAL: 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	


TIP NO.	SHEET NO.
B-5614	PMP-2
APPROVED: <i>David Ruggles</i> C462768DF412422... 6/12/2025	
DATE: 6/12/2025	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

NAD 83/NA 2011

BLOUNTS CREEK

20

MATCHLINE -L- STA 23+00.00
SEE SHEET PMP-3

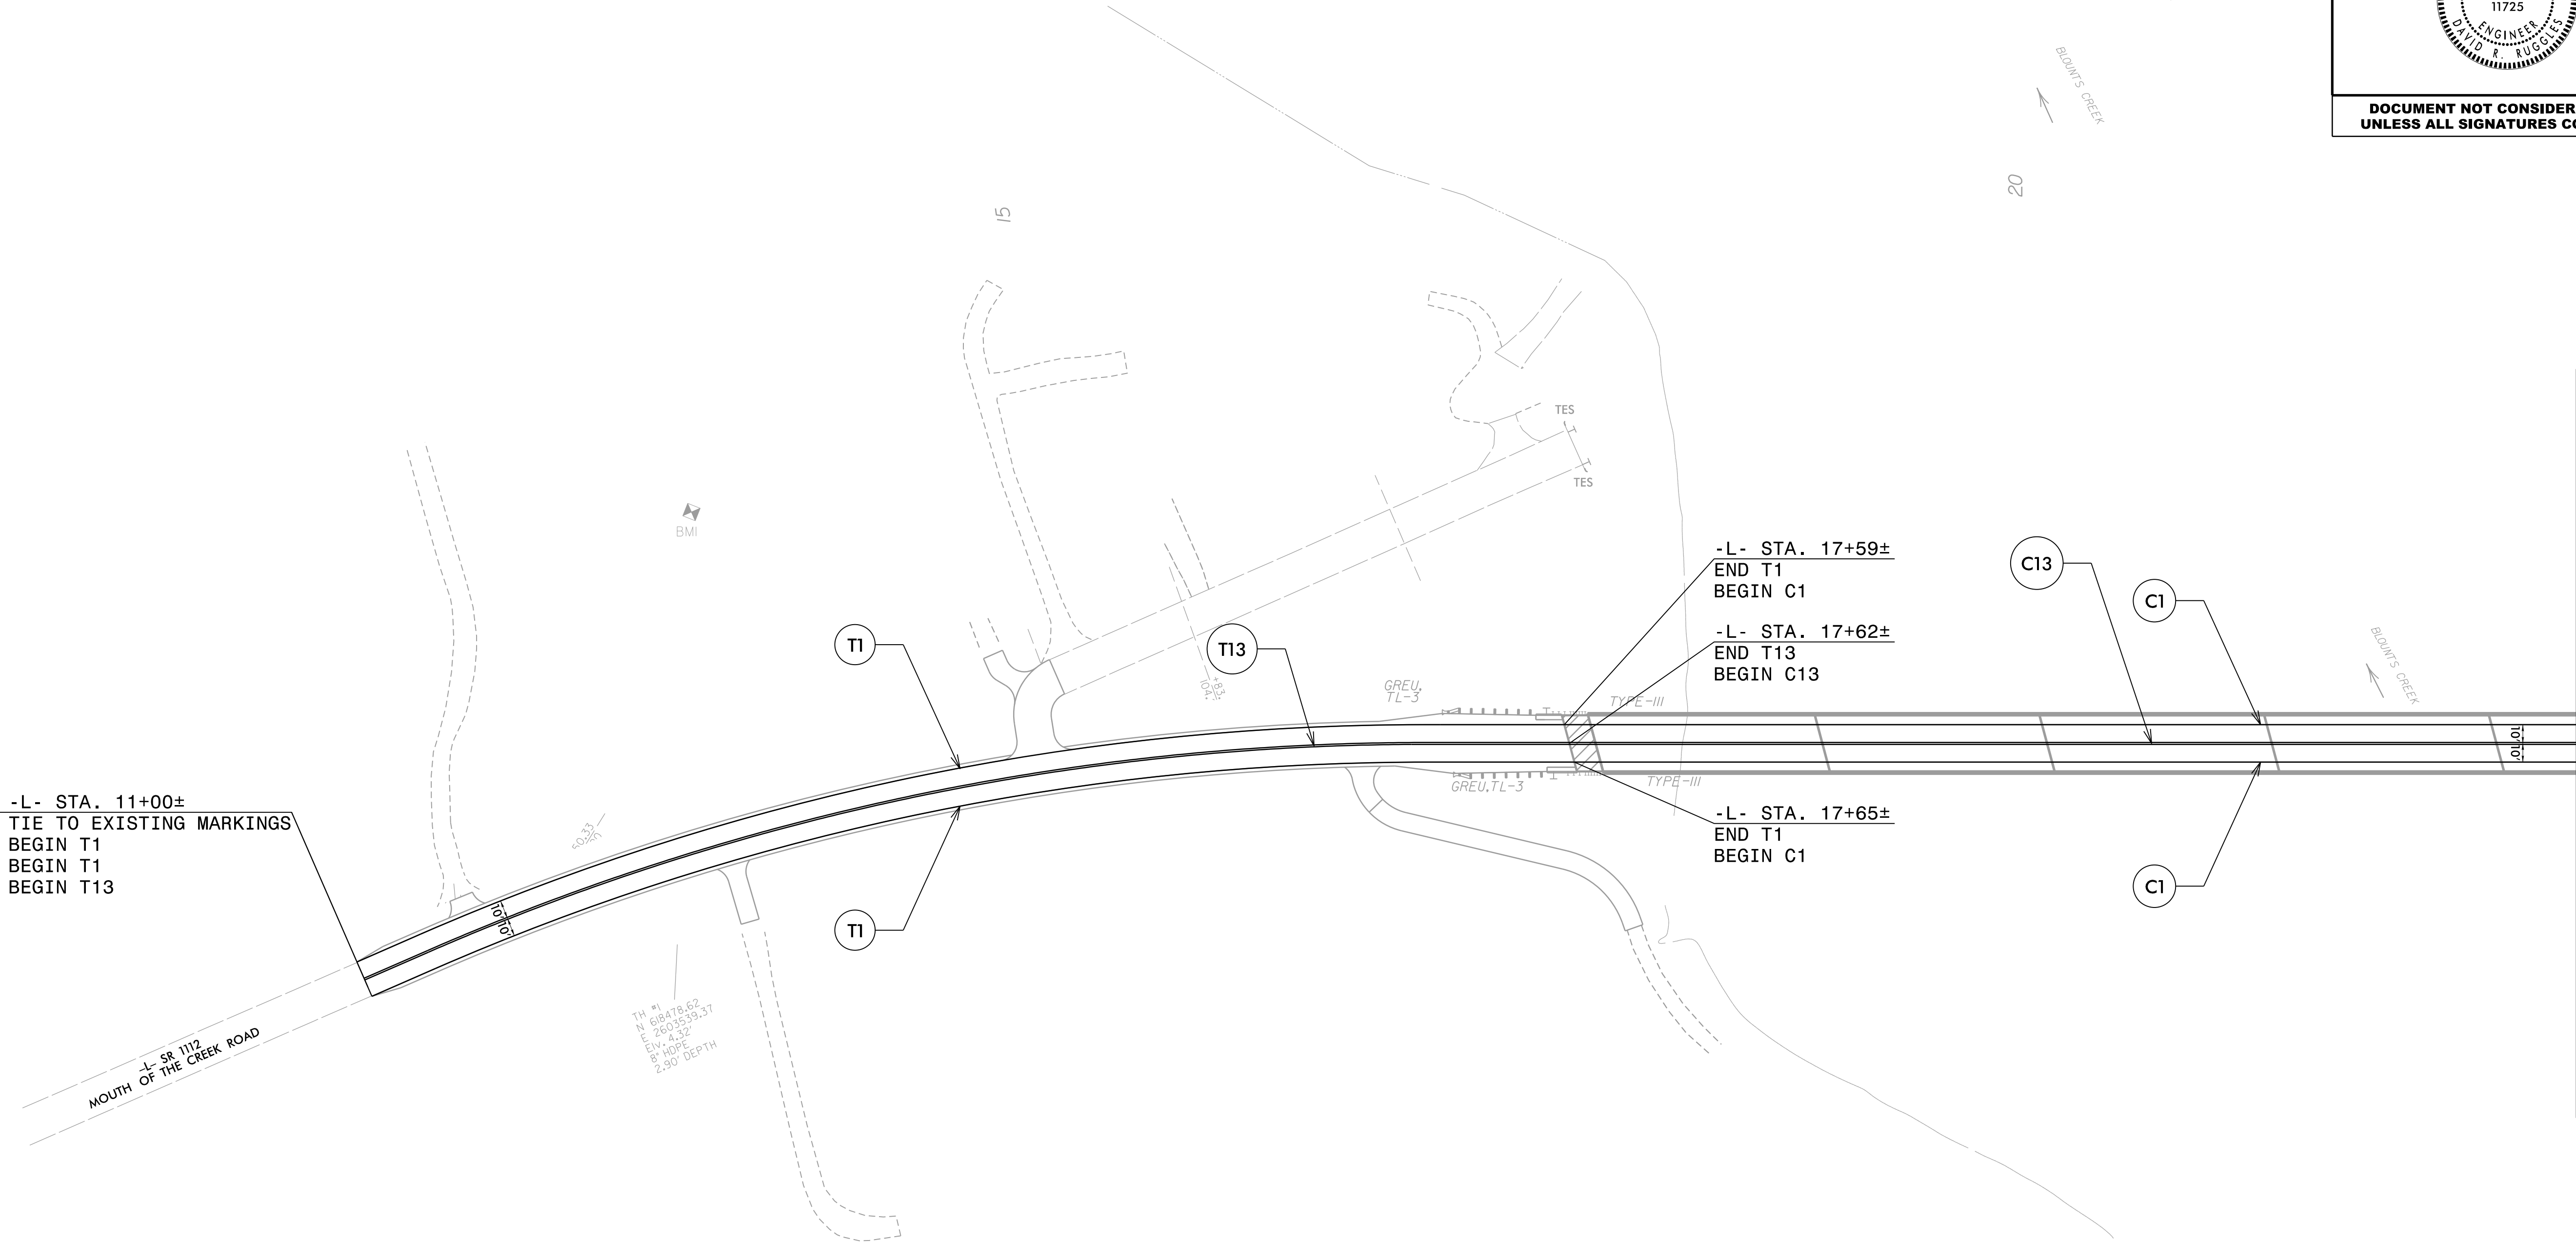

-L- STA. 11+00±
TIE TO EXISTING MARKINGS
BEGIN T1
BEGIN T1
BEGIN T13

-L- STA. 17+59±
END T1
BEGIN C1
-L- STA. 17+62±
END T13
BEGIN C13

-L- STA. 17+65±
END T1
BEGIN C1




PAVEMENT MARKING PLANS

REVISIONS

6/11/2025
\\TCP\B5614_SGN_PMP02.dgn
USER:dfguit

6/11/2025
\\TCP\B5614_SGN_PMP03.dgn
USER:dfguit






Firm License No. C-1051
223 S. West St.
Suite 1100
Raleigh, NC 27603
T 919.380.8750
www.stewartinc.com

STEWART

REVISIONS

MATCHLINE -L- STA 23+00.00
SEE SHEET PMP-2

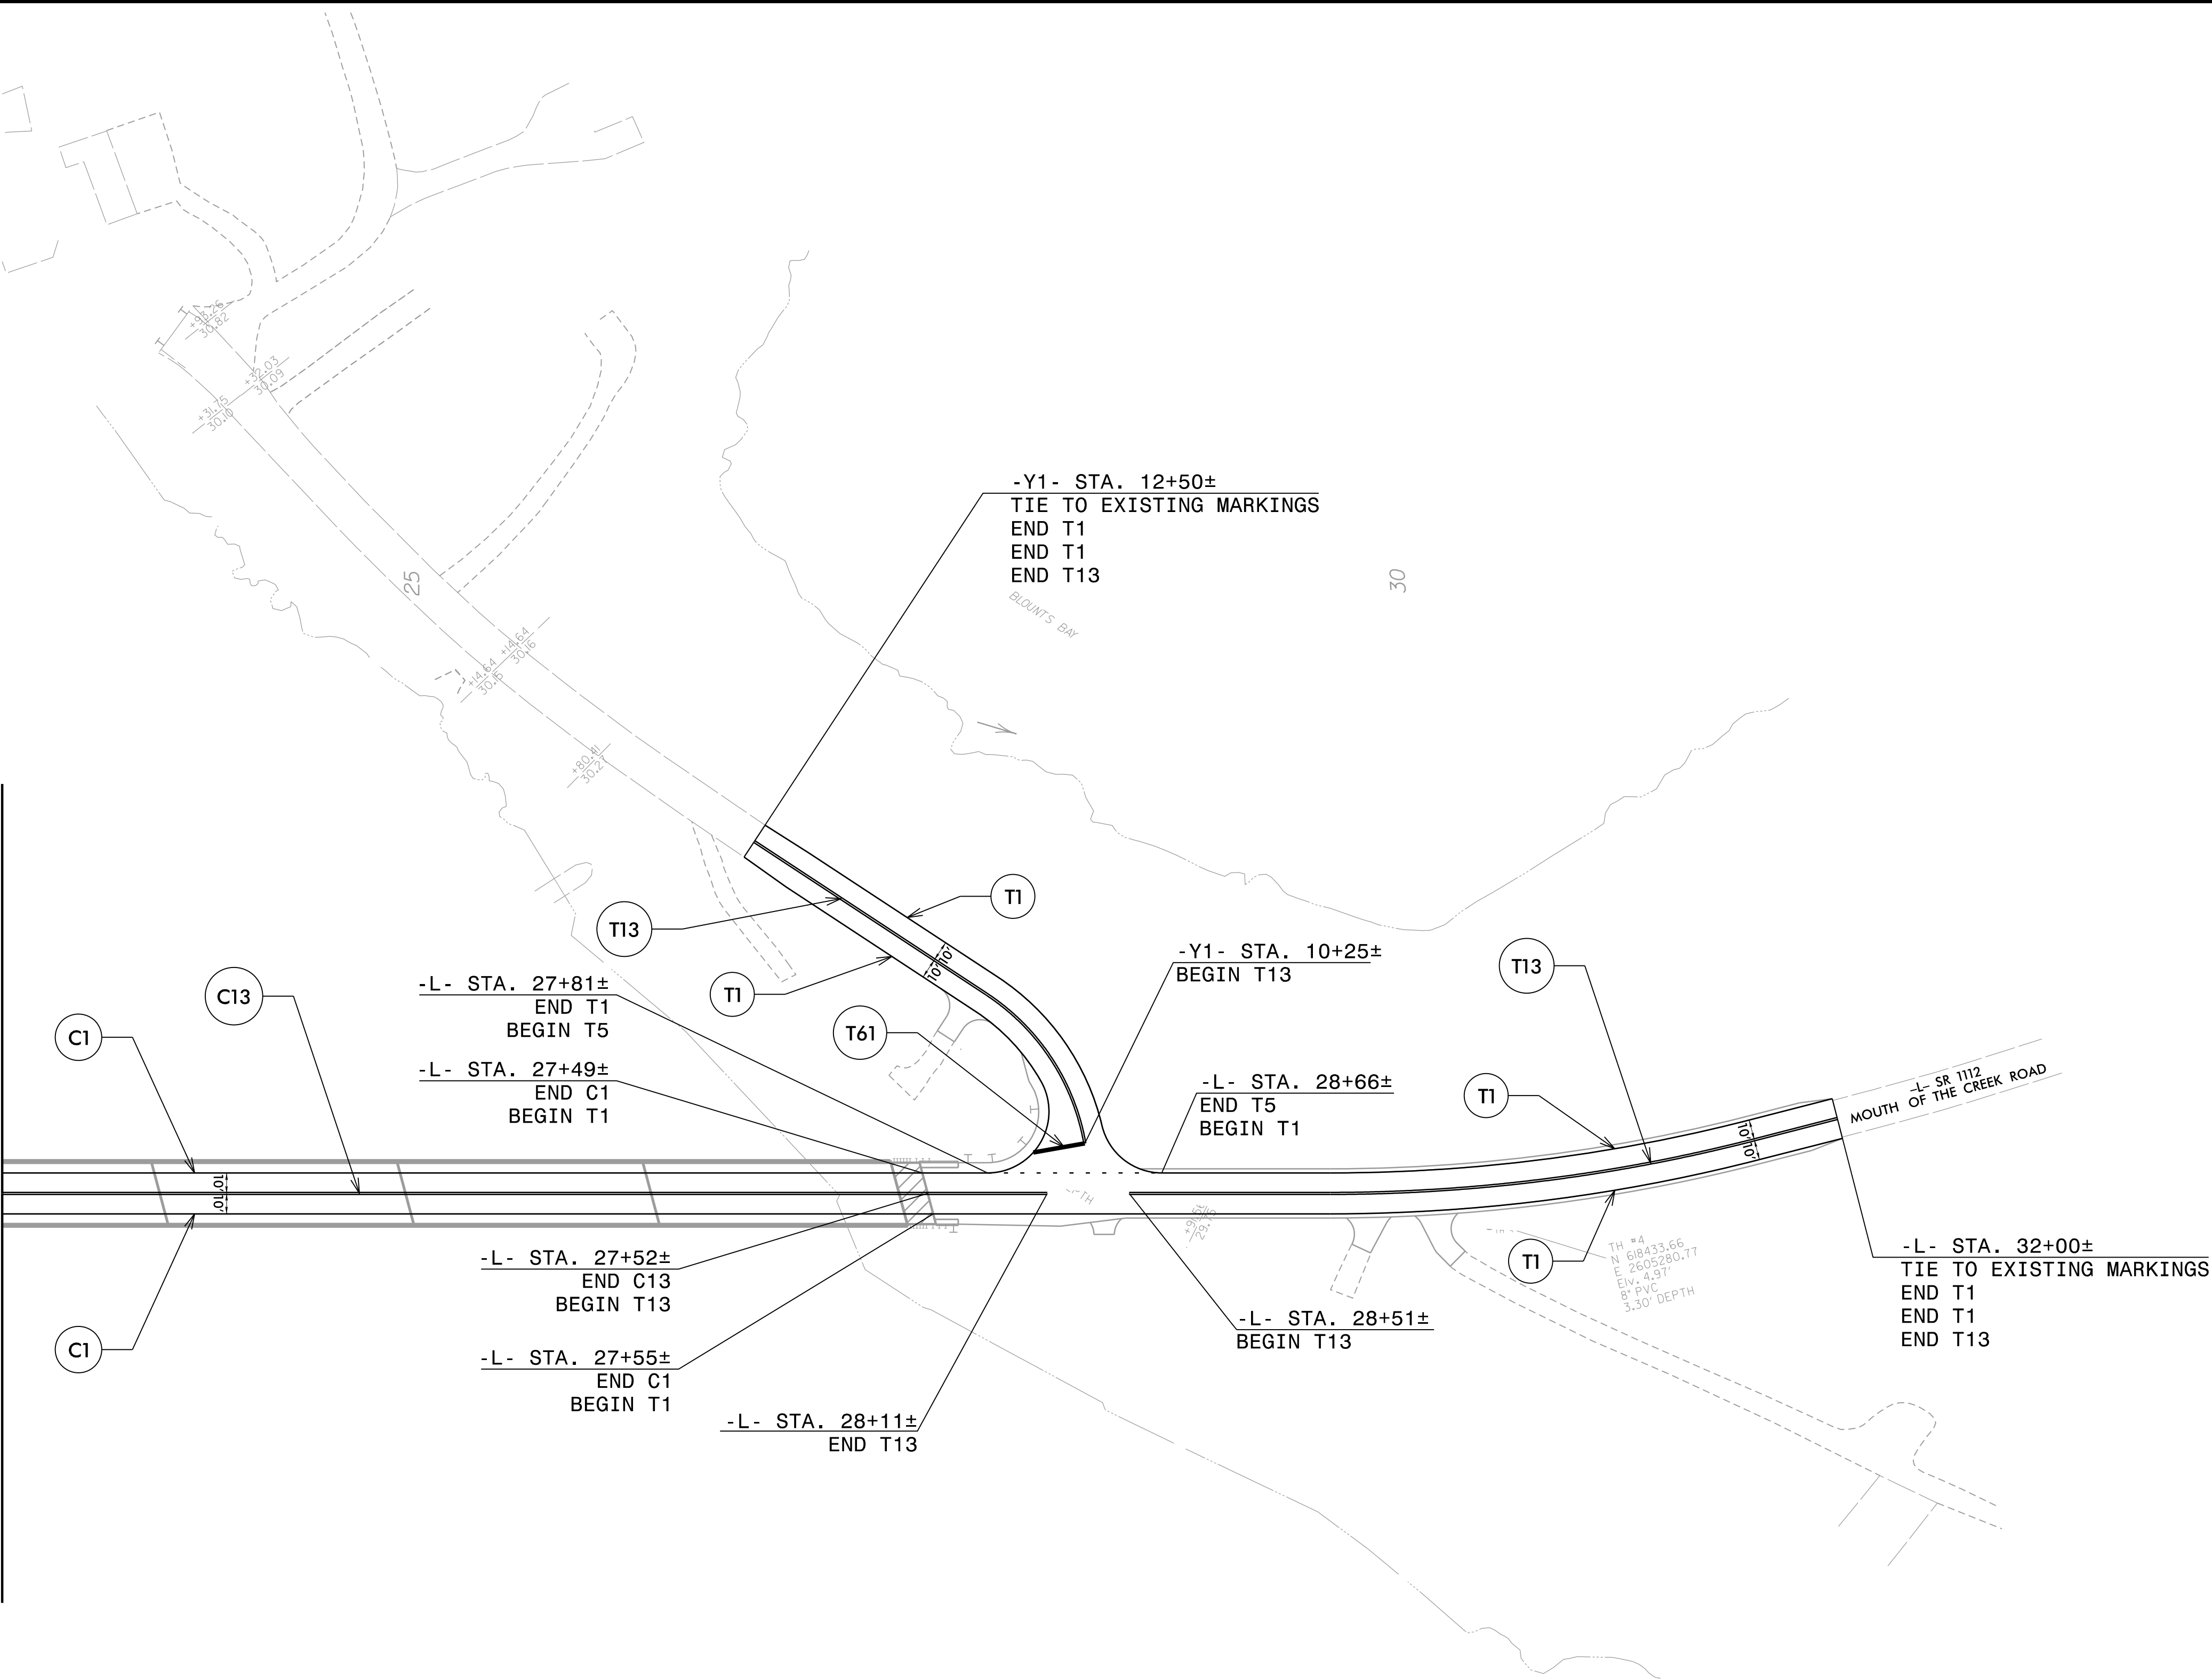

TIP NO.	SHEET NO.
B-5614	PMP-3
APPROVED:  C462780DF412422...	
DATE: 6/12/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

PAVEMENT MARKING PLANS