

5/28/2025
\\signing\B5614_Sgn_SGN1.dgn
USER: default

CONTRACT: C204711

T.I.P.: B-5614

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
BEAUFORT COUNTY

LOCATION: BRIDGE #060009 OVER BLOUNTS CREEK ON SR 1112 (MOUTH OF THE CREEK ROAD)

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON WOOD POSTS

GENERAL NOTES

- SIGNS FURNISHED BY CONTRACTOR
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

INDEX


SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2 THRU SIGN-3	EXISTING SIGN DETAIL SHEETS
SIGN-4 THRU SIGN-5	PROPOSED SIGN DETAIL SHEETS

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	84	S.F.
4082000000	903	SUPPORTS, WOOD	197	L.F.
4102000000	904	SIGN ERECTION, TYPE E	28	EA.
4158000000	907	DISPOSAL OF SIGN SYSTEM, WOOD	13	EA.

PLAN SUBMITTED TO:

DAVID M. EATON, PE SIGNING AND DELINEATION REGIONAL ENGINEER
MATTHEW M. TRACEY, PE SIGNING AND DELINEATION PROJECT DESIGN ENGINEER

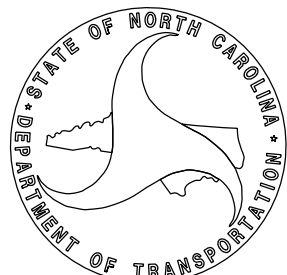

PLAN PREPARED BY: STEWART


DAVID RUGGLES, PE PROJECT ENGINEER
AMJAD IBRAHIM, PE PROJECT DESIGN ENGINEER



TIP NO.	SHEET NO.
B-5614	SIGN-1
Designed by: <u>David Ruggles</u>	
APPROVED: <u>David Ruggles</u>	
DATE: <u>7/14/2025</u>	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

TYPE "E" SIGNS

401 QUANTITY REQ'D 1 30" X 30" R1-1 ONE WOOD POST PER SIGN	402 QUANTITY REQ'D 1 30" X 30" W14-2 ONE WOOD POST PER SIGN	403 QUANTITY REQ'D 1 30" X 30" W2-2 ONE WOOD POST PER SIGN
404 QUANTITY REQ'D 1 30" X 30" W1-5 ONE WOOD POST PER SIGN	405 QUANTITY REQ'D 1 18" X 18" W13-1P MOUNT BELOW SIGN 404 IN 1 INSTALLATION	406 QUANTITY REQ'D 8 12" X 18" R7-1 ONE WOOD POST PER SIGN MOUNT BELOW SIGNS 401 AND 402 IN ONE INSTALLATION EACH MOUNT BELOW SIGN 409 IN TWO INSTALLATIONS
407 QUANTITY REQ'D 3 30" X 12" R3-9cP MOUNT BELOW SIGN 406 IN 3 INSTALLATIONS	408 QUANTITY REQ'D 3 30" X 12" R3-9dP MOUNT BELOW SIGN 406 IN 3 INSTALLATIONS	409 QUANTITY REQ'D 2 24" X 30" R20-3 ONE WOOD POST PER SIGN
410 QUANTITY REQ'D 6 18" X 18" OM4-1 ONE WOOD POST PER SIGN	411 QUANTITY REQ'D 1 30" X 30" W2-2 ONE WOOD POST PER SIGN	

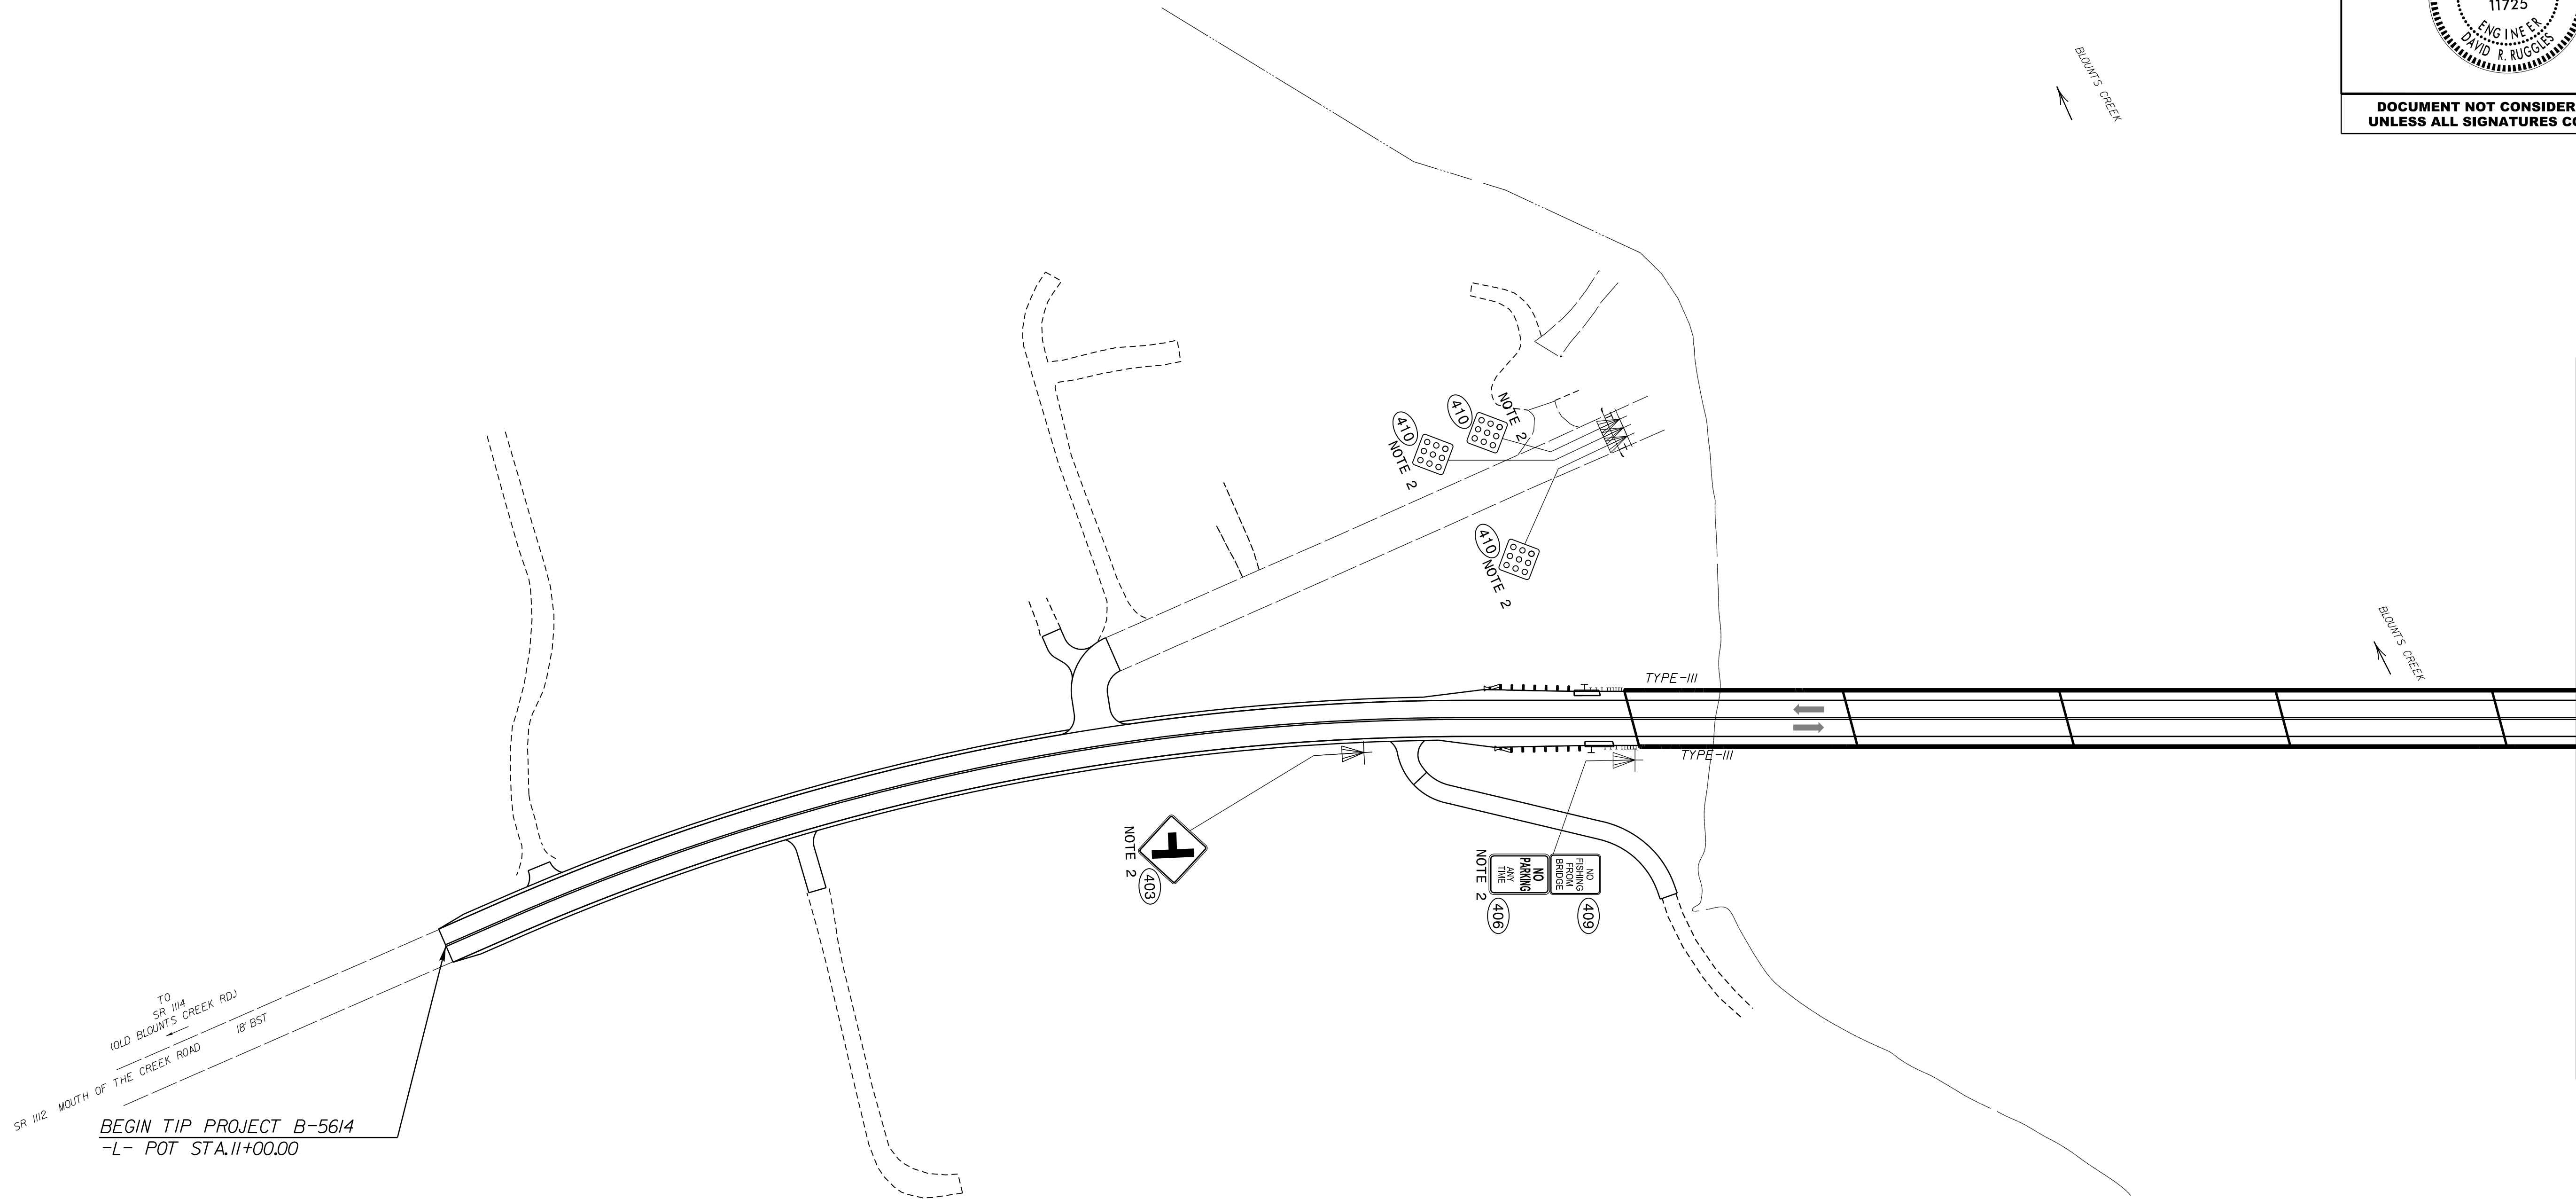

PROJECT NOTES

1

DISPOSAL OF SIGN SYSTEM, WOOD

2

SIGN ERECTION, TYPE D, E AND F


PROPOSED SIGNS

TIP NO.	SHEET NO.
B-5614	SIGN-4
APPROVED: <div>DocuSigned by: David Ruggles C482788DF412422</div>	
DATE: 7/14/2025	
SEAL	
<div>SEAL 11725 ENGINEER DAVID R. RUGGLES</div>	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

MATCHLINE -L- STA 23+00.00
SEE SHEET SIGN-5

5/29/2025
Signing_B5614_Sgn_SGN5.dgn
USER: default

MATCHLINE -L- STA 23+00.00
SEE SHEET SIGN-4

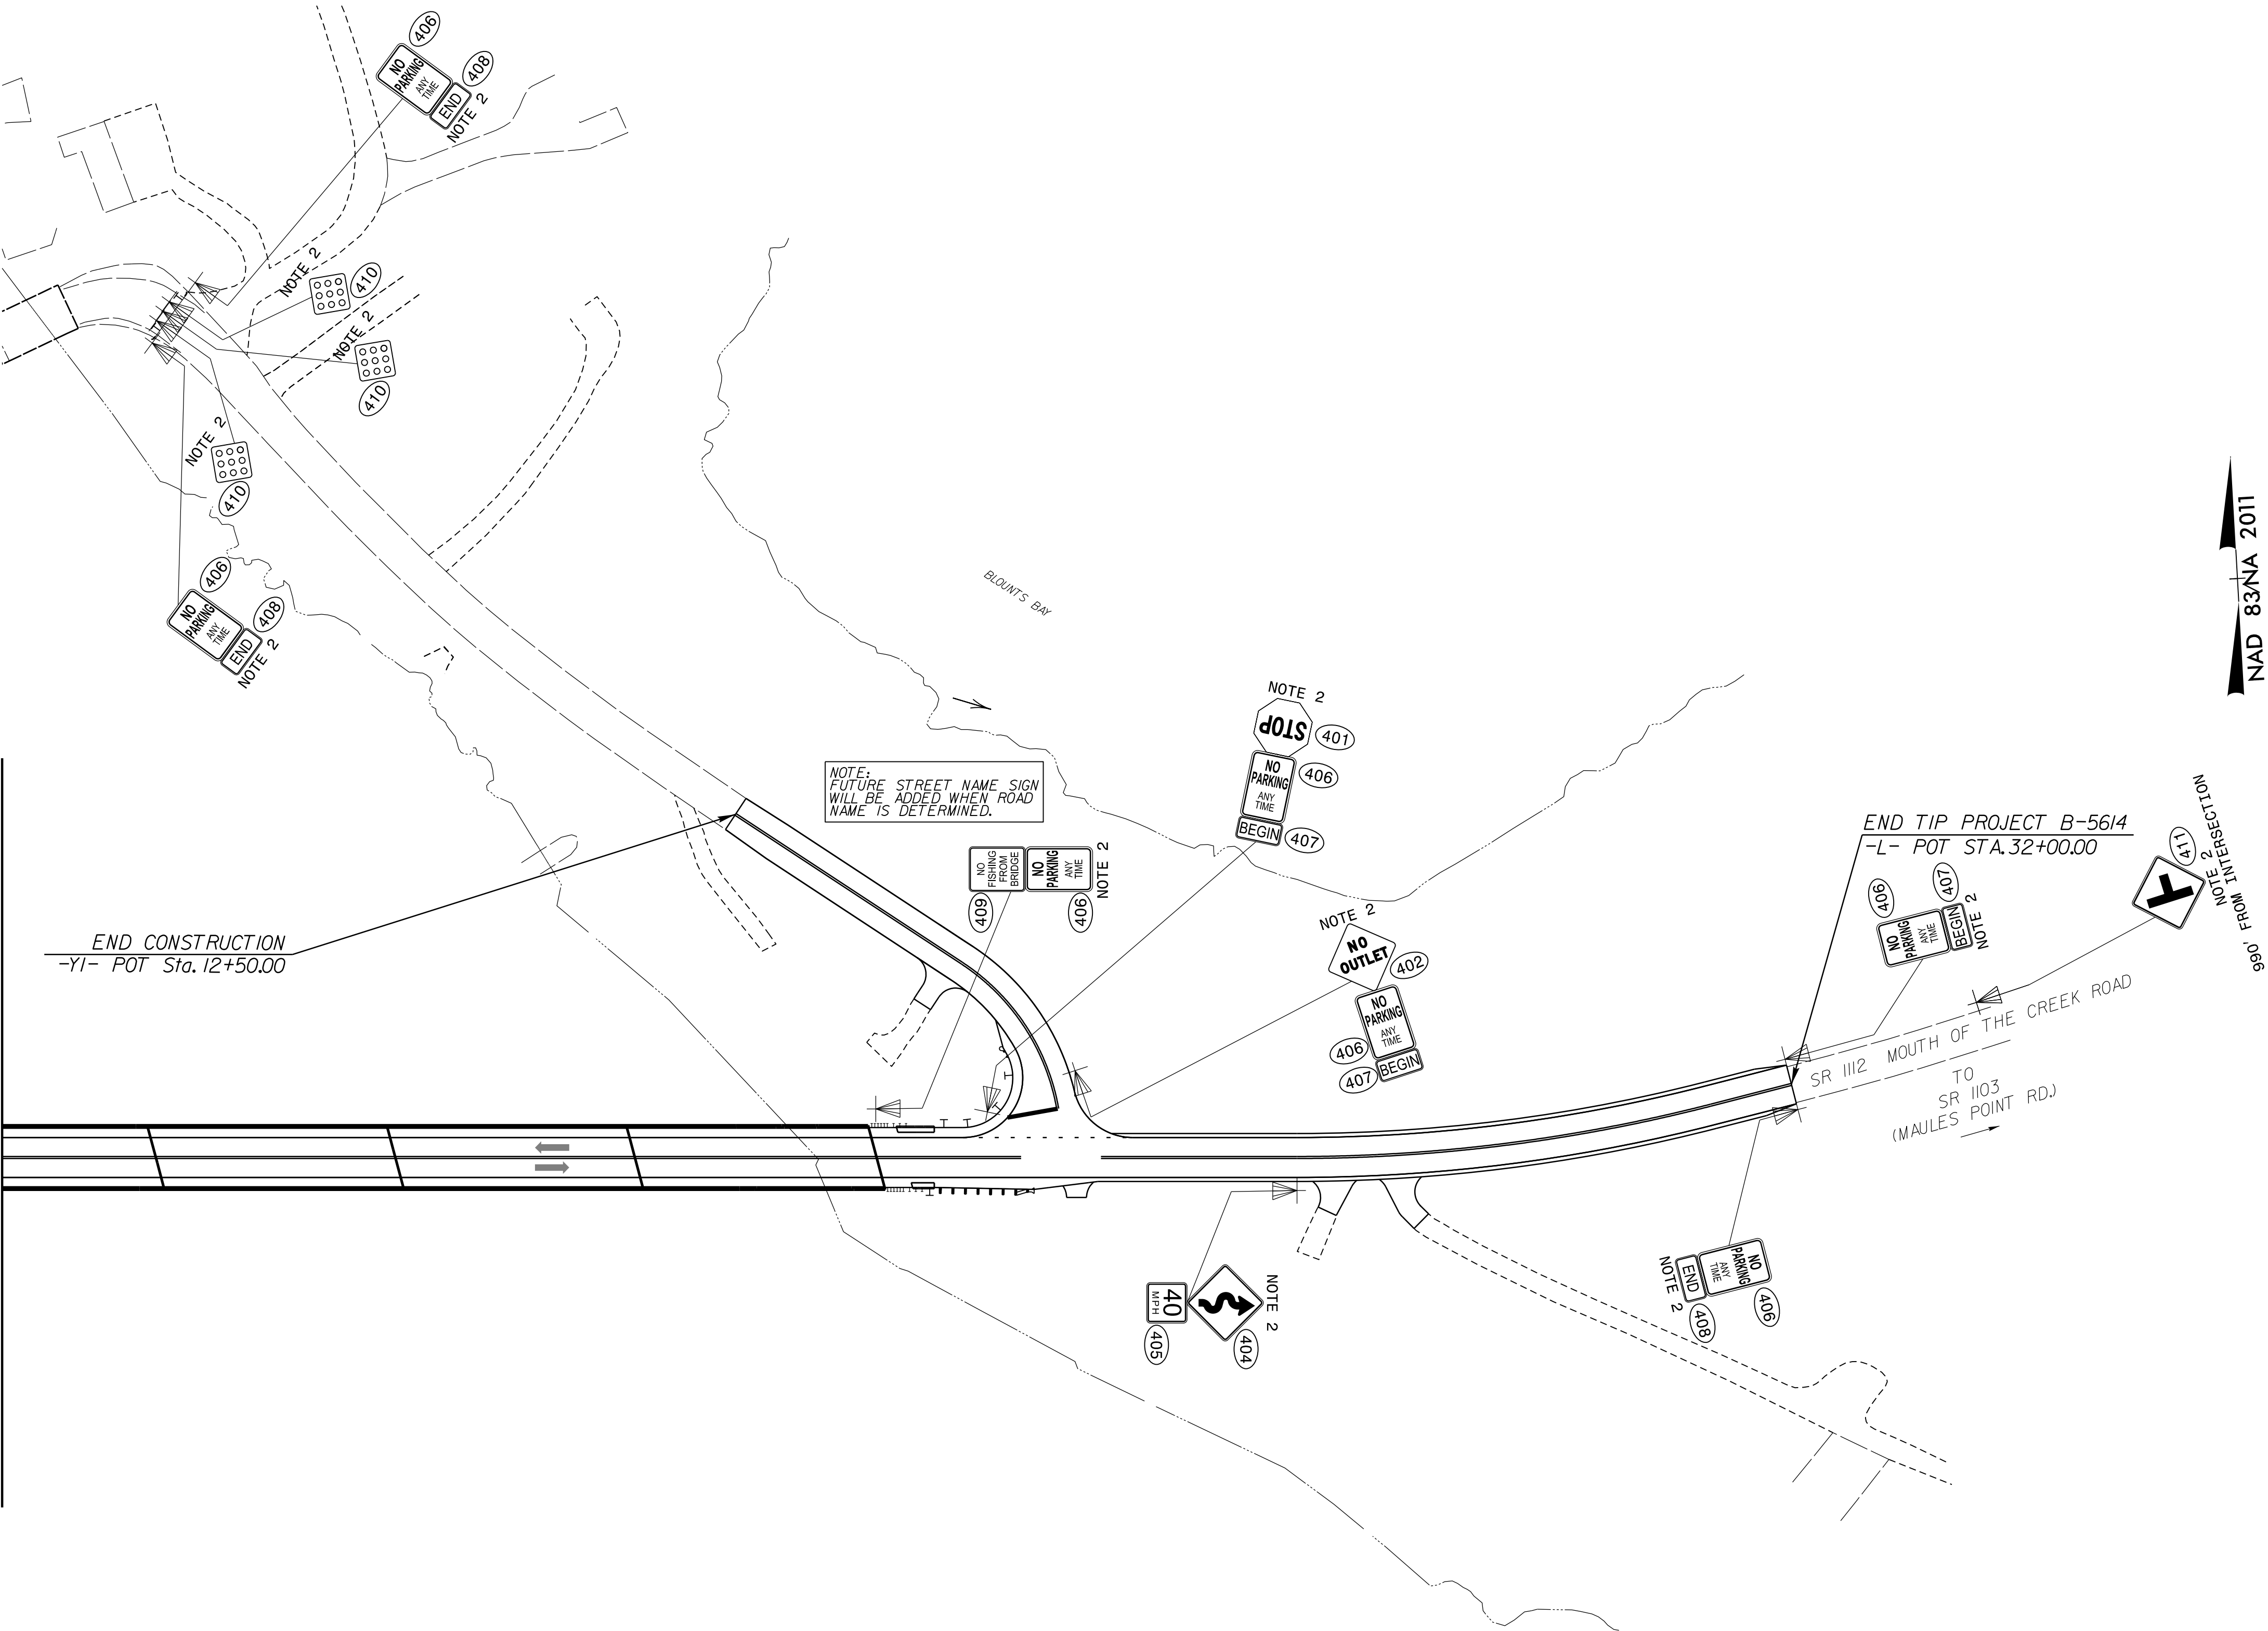

PROJECT NOTES

- 1 DISPOSAL OF SIGN SYSTEM, WOOD
- 2 SIGN ERECTION, TYPE D, E AND F

PROPOSED SIGNS

TIP NO.	SHEET NO.
B-5614	SIGN-5
APPROVED: <i>David Ruggles</i> C402768DF412422 7/14/2025	
DATE: 7/14/2025	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	