

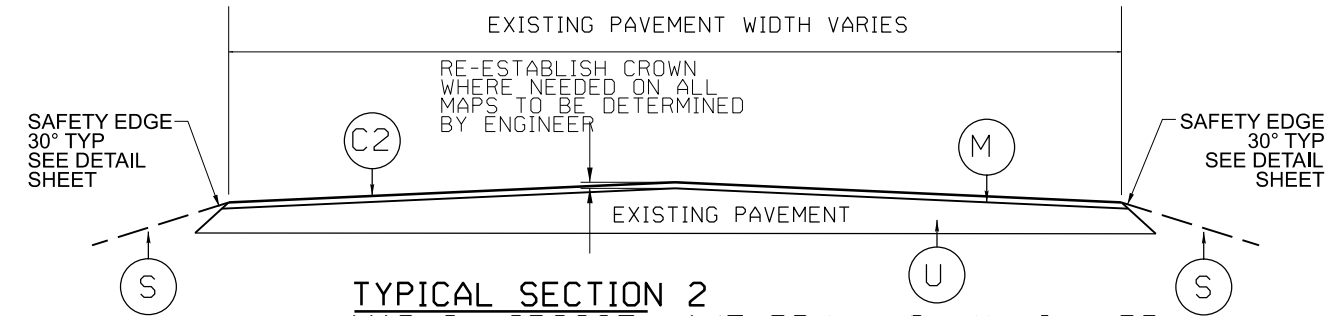
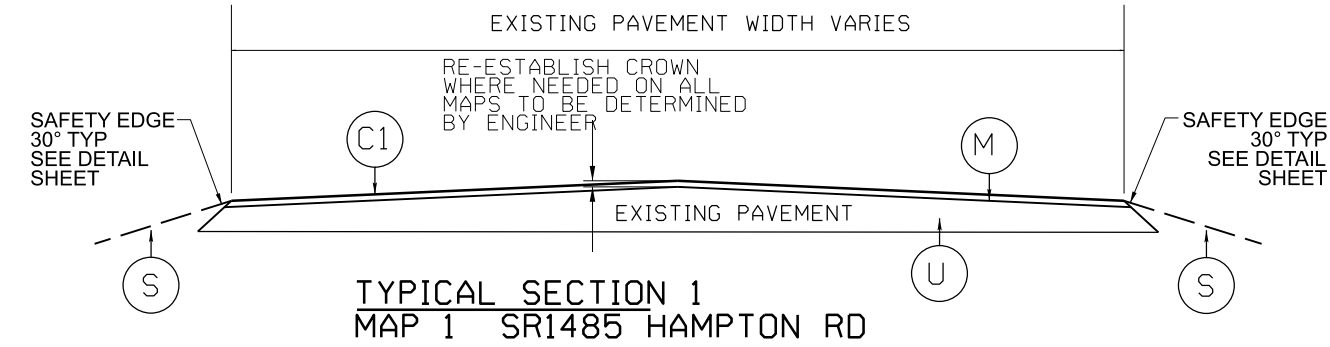
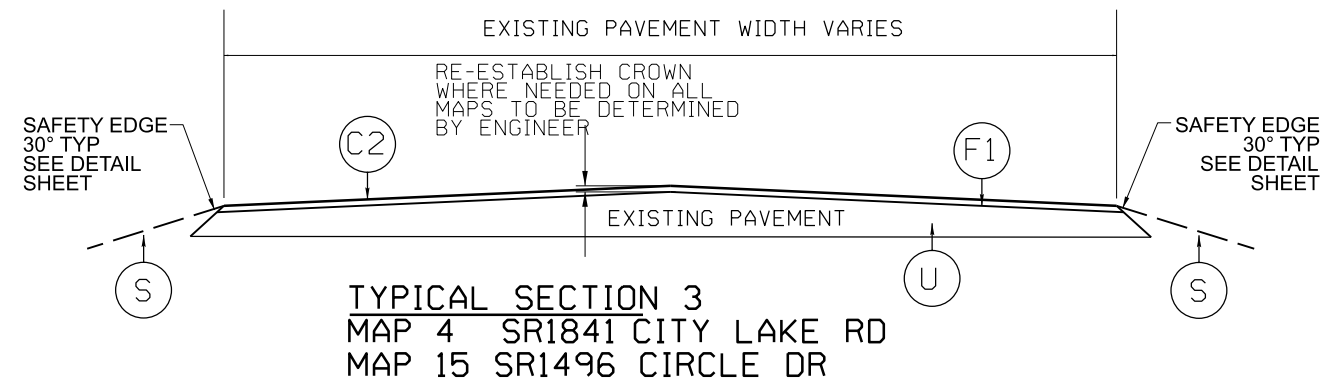


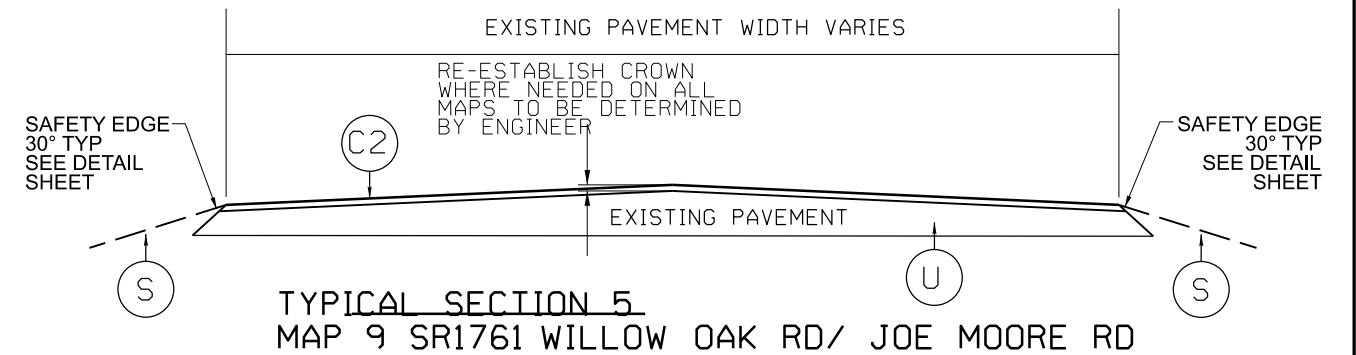

- MAP 2 SR2087 LAKE RD/W HOLLY HILL RD
MAP 3 SR2087 W HOLLY HILL RD
MAP 5 SR2020 LOWER LAKE RD
MAP 6 SR2066 KENNEDY RD
MAP 7 SR1769 PLEASANT GROVE CHURCH RD
MAP 8 SR1757 CHESTNUT ST EXT
MAP 10 SR1772 JOE MOORE RD
MAP 11 SR1776 JOE MOORE RD
MAP 12 SR1319 NEW JERSEY CHURCH RD
MAP 13 SR1323 NEW JERSEY CHURCH RD
MAP 14 SR1272 JERSEY CHURCH RD
MAP 16 SR1118 HUGH MILLER RD

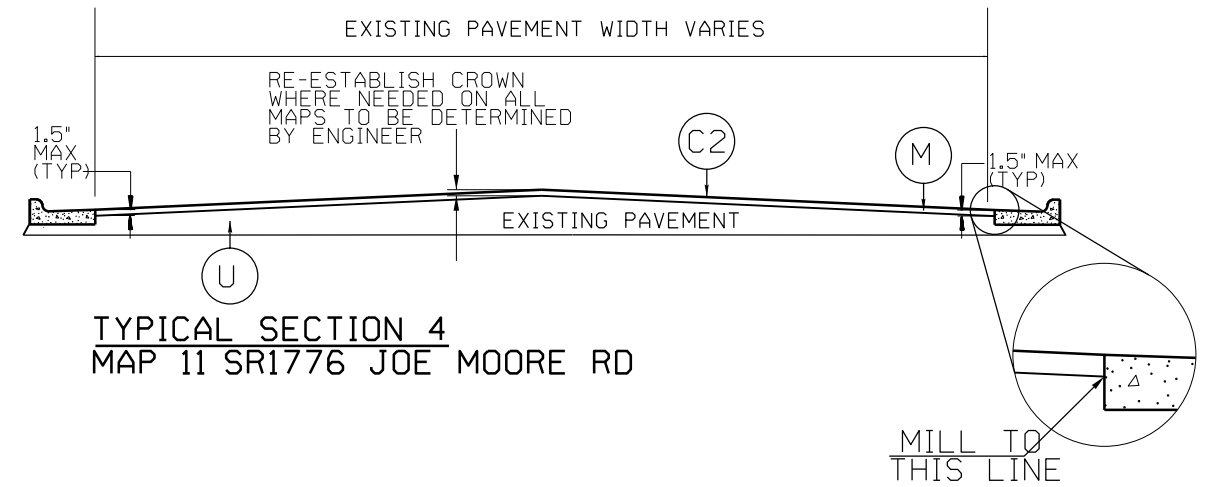

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 11/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C2	PROP. APPROX. 11/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
F1	ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE TO BE APPLIED AT AN AVERAGE OF 18 LBS/PER SQ YD. EMULSION RATE OF 0.38 GAL/PER SQ YD. ALL MATCOAT TO BE COVERED WITH ASPHALT CONCRETE SURFACE MIX BY END OF EACH WORK DAY
M	MILL ASPHALT PAVEMENT, 11/2" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT