


PROJECT REFERENCE NO.	SHEET NO.
U - 5760	SCP - 03

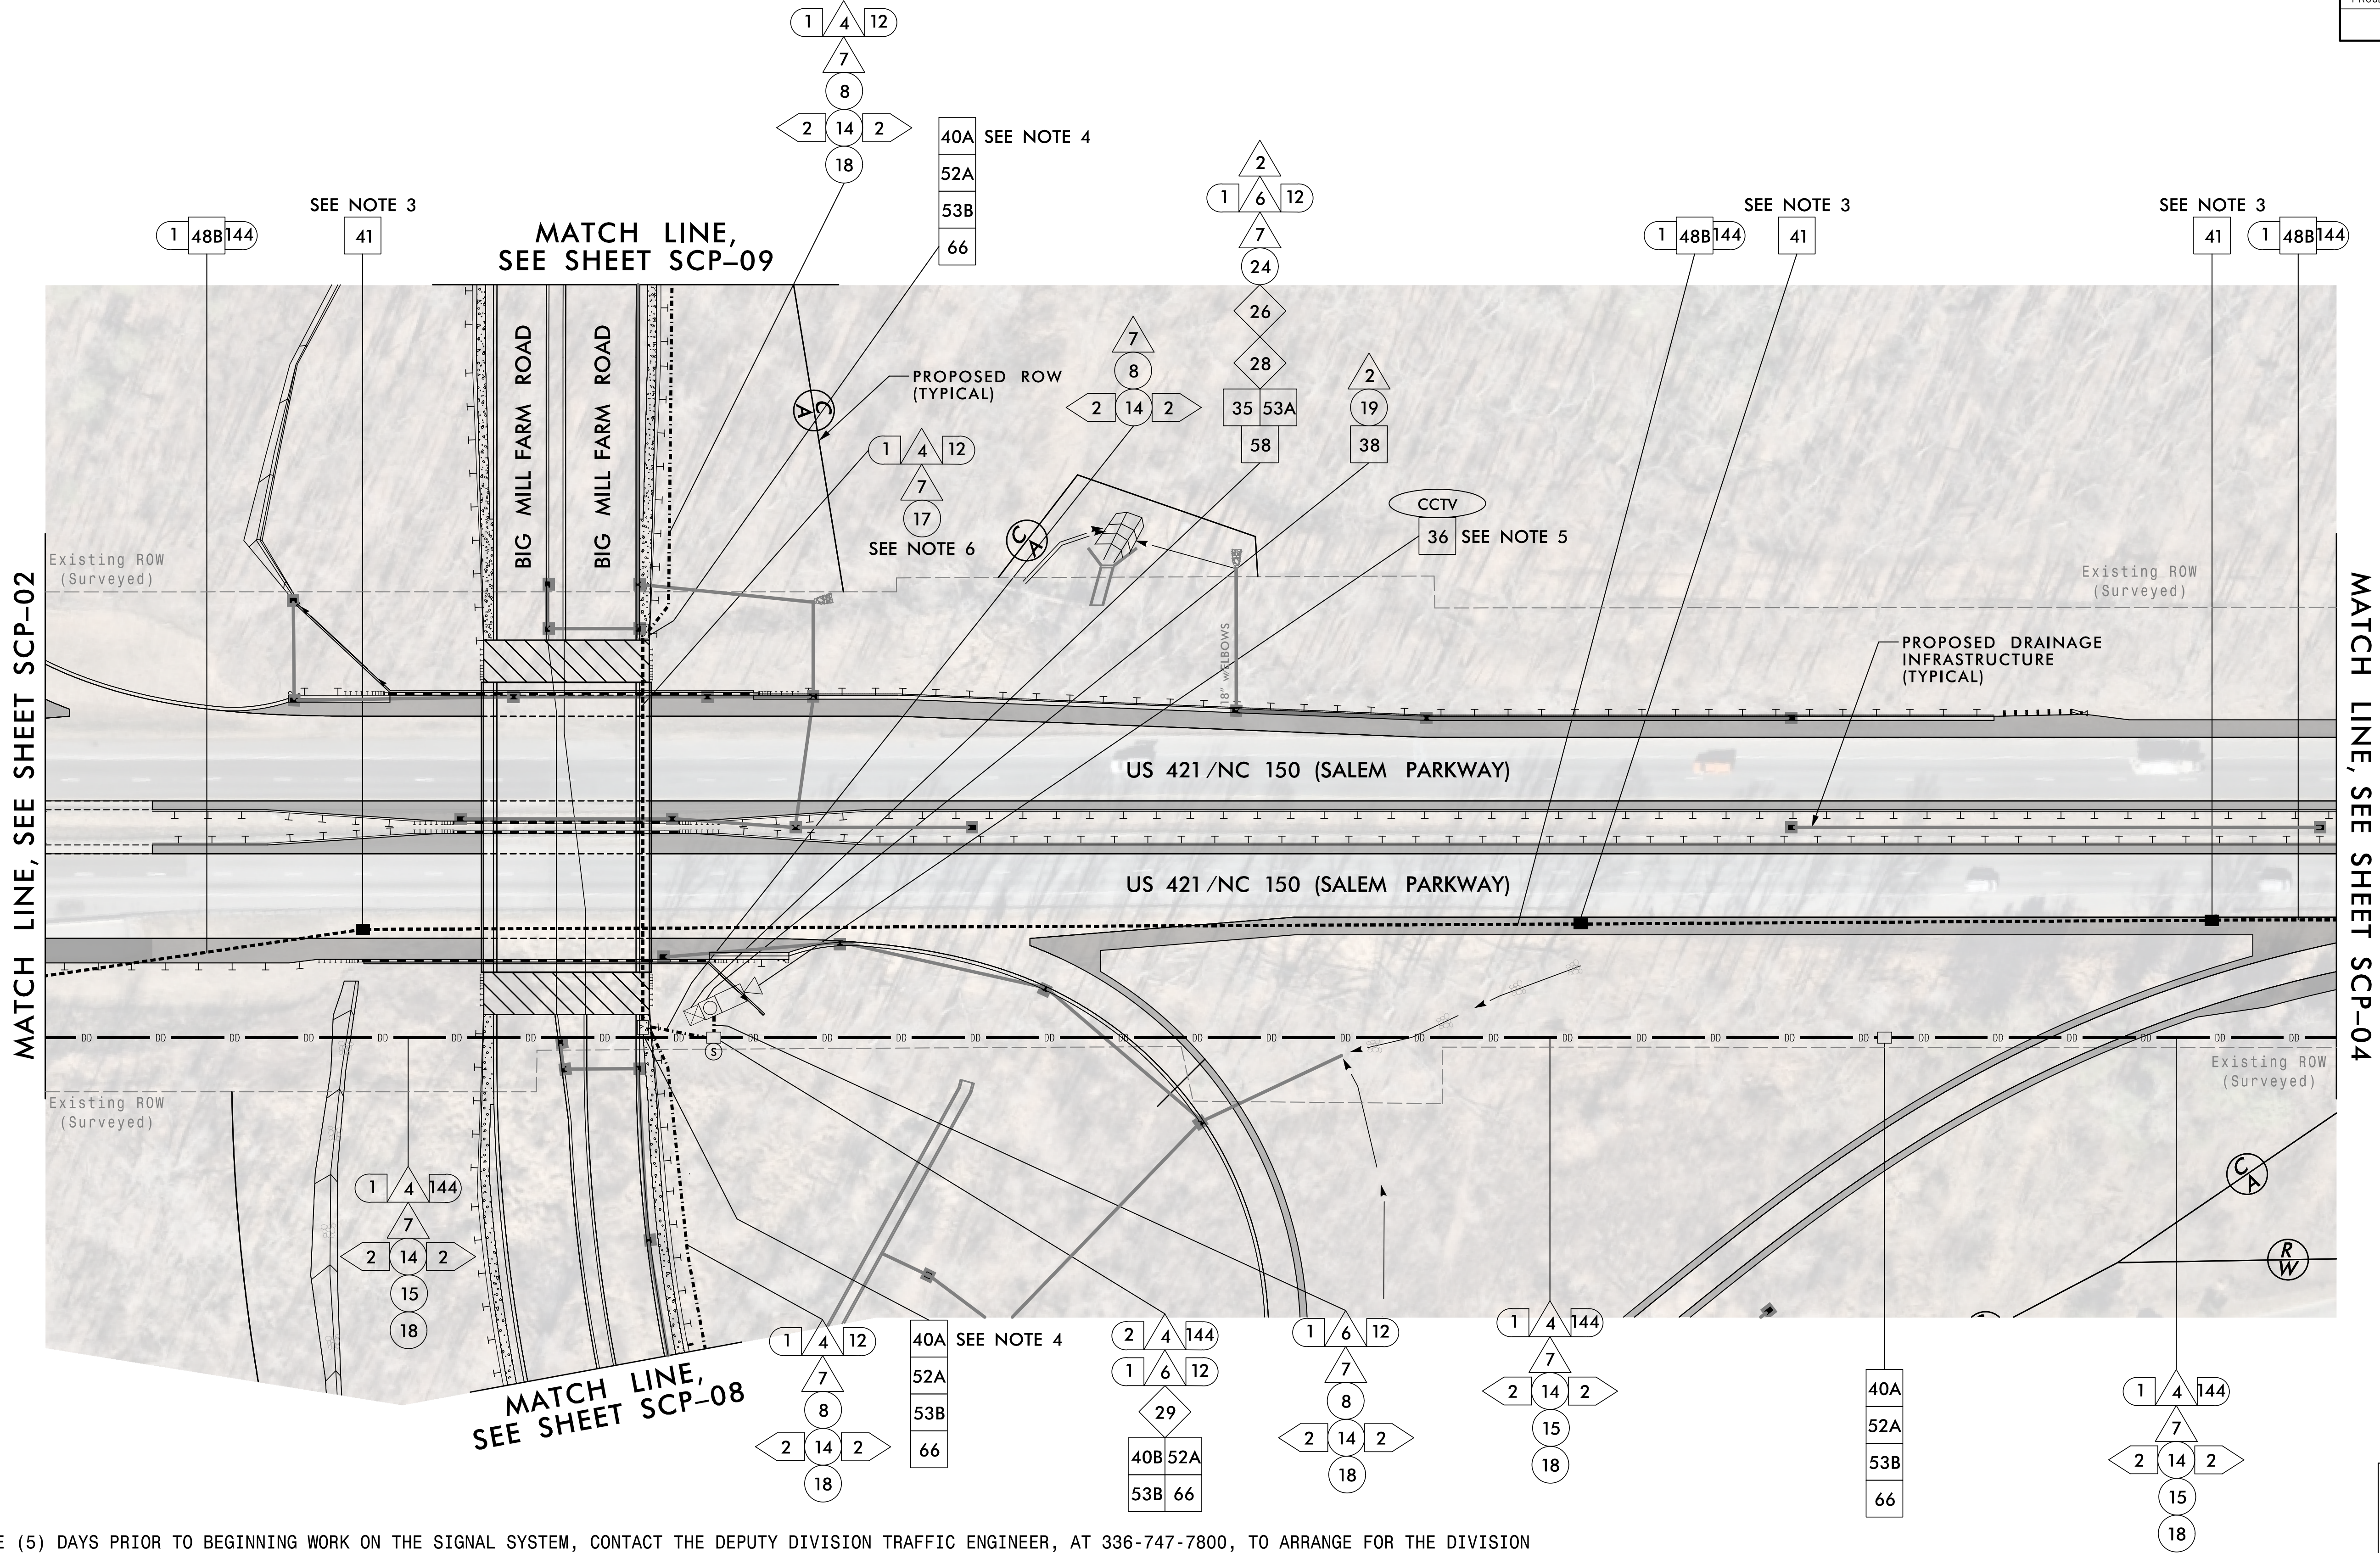

7/14/2025
ks\\RAL_Roadway\\01036392 - U-5760 Big Mill Farm Road\\Traffic Signal\\S6 - Cable Routing\\L\\CADD\\U-5760_scp03.dgn

NOTES:

- FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DEPUTY DIVISION TRAFFIC ENGINEER, AT 336-747-7800, TO ARRANGE FOR THE DIVISION TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
- REMOVE EXISTING JUNCTION BOX AND BACKFILL WITH APPROVED SUBGRADE MATERIAL. CUT CONDUIT OFF 30" BELOW GRADE AND ABANDON.
- INSTALL NEW JUNCTION BOXES IN ADVANCE OF BRIDGE SLABS AND INTEGRATE WITH BRIDGE CONDUIT STUBOUTS.
- MOUNT CCTV CAMERA AT A HEIGHT OF 45' ABOVE FINAL GRADE.
- SEE BRIDGE DETAILS FOR INSTALLATION OF CONDUIT IN BRIDGE STRUCTURE.

	U-5760			
	Communications Cable and Conduit Routing Plan			
	Division 9	Forsyth County Kernersville		
	PLAN DATE: September 2024	REVIEWED BY: KW Smith		
PREPARED BY: MC Burke	REVIEWED BY:	REVISIONS	INIT.	DATE

Kimley»Horn	
NC License #F-0102 421 Fayetteville St., Suite 600 Raleigh, NC 27601 Tel: (919) 677-2000 Fax: (919) 677-2050	
SEAL NORTH CAROLINA PROFESSIONAL SEAL 030472 ENGINEER KEVIN W. SMITH	
DocuSigned by Kevin Smith 00065048580440F... SIGNATURE DATE	
7/14/2025 CADD Filename:	