


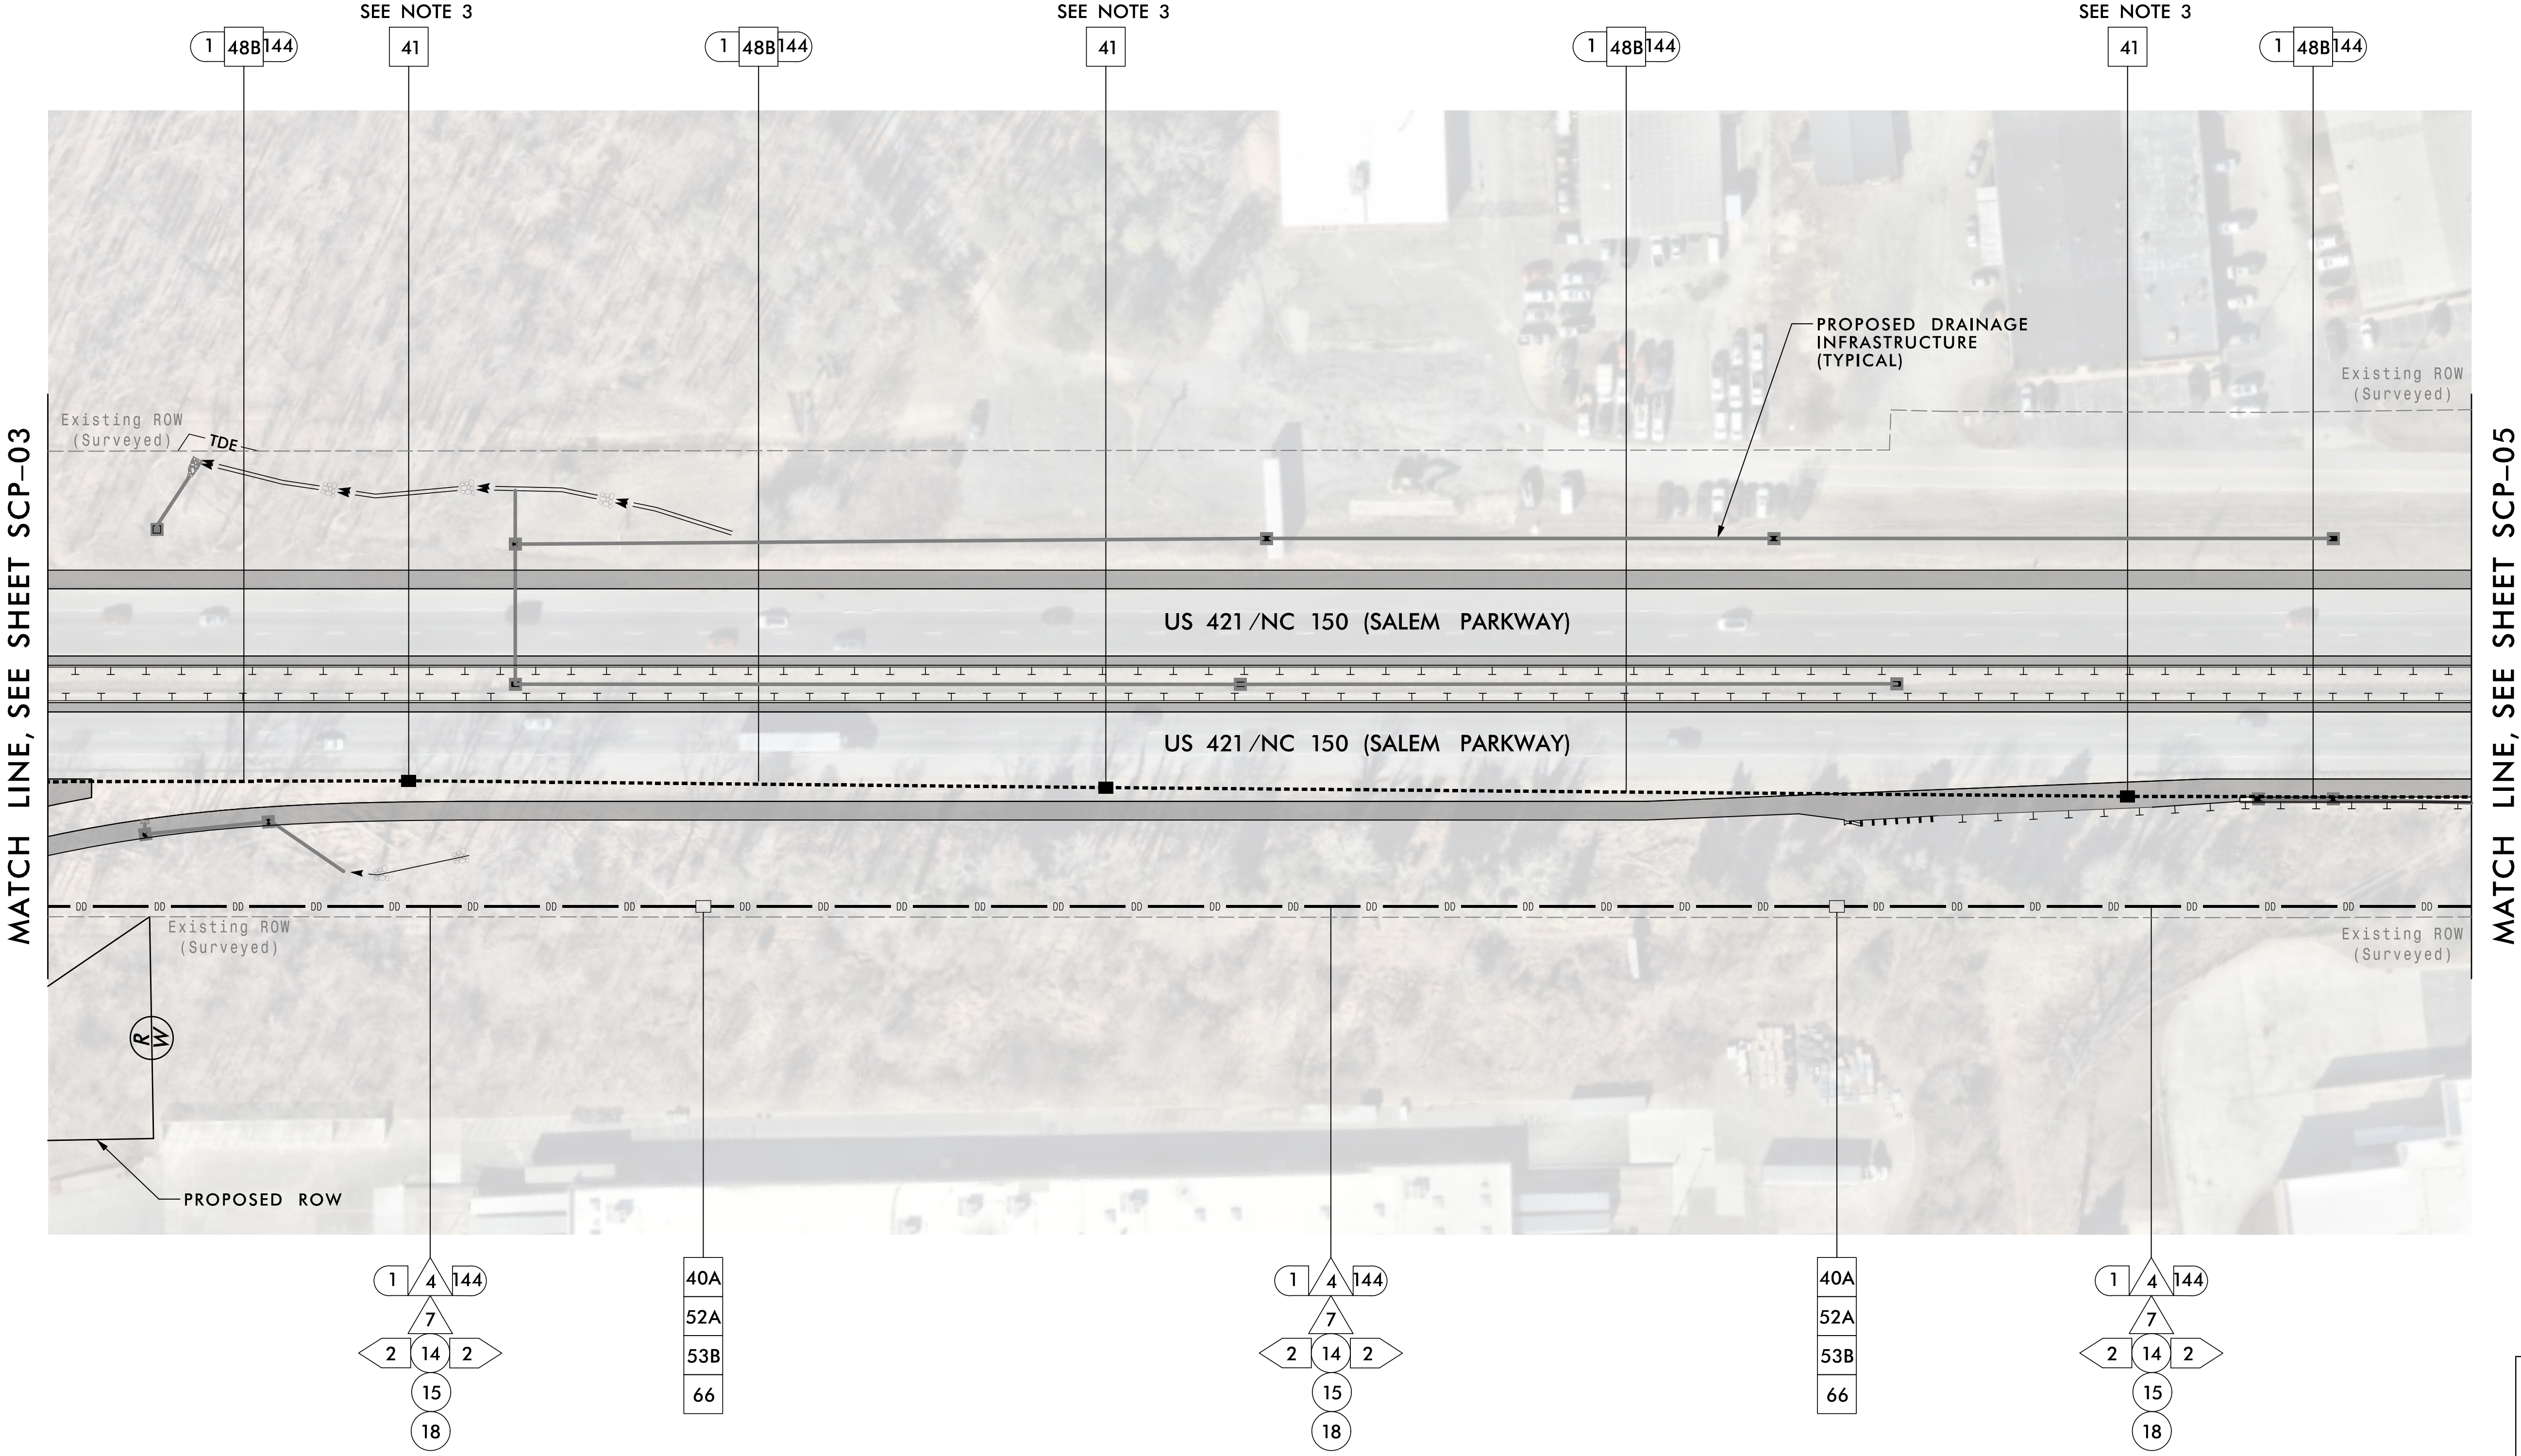

NOTES:

- 1) FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DEPUTY DIVISION TRAFFIC ENGINEER, AT 336-747-7800, TO ARRANGE FOR THE DIVISION TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERAITONAL.
- 2) CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
- 3) REMOVE EXISTING JUNCTION BOX AND BACKFILL WITH APPROVED SUBGRADE MATERIAL. CUT CONDUIT OFF 30" BELOW GRADE AND ABANDON.

	U-5760		
	Communications Cable and Conduit Routing Plan		
	Division 9	Forsyth County Kernersville	
	PLAN DATE: September 2024	REVIEWED BY: KW Smith	
	PREPARED BY: MC Burke	REVIEWED BY:	
	REVISIONS	INIT.	DATE
SCALE 0 N/A			
CADD Filename:		7/14/2025	