
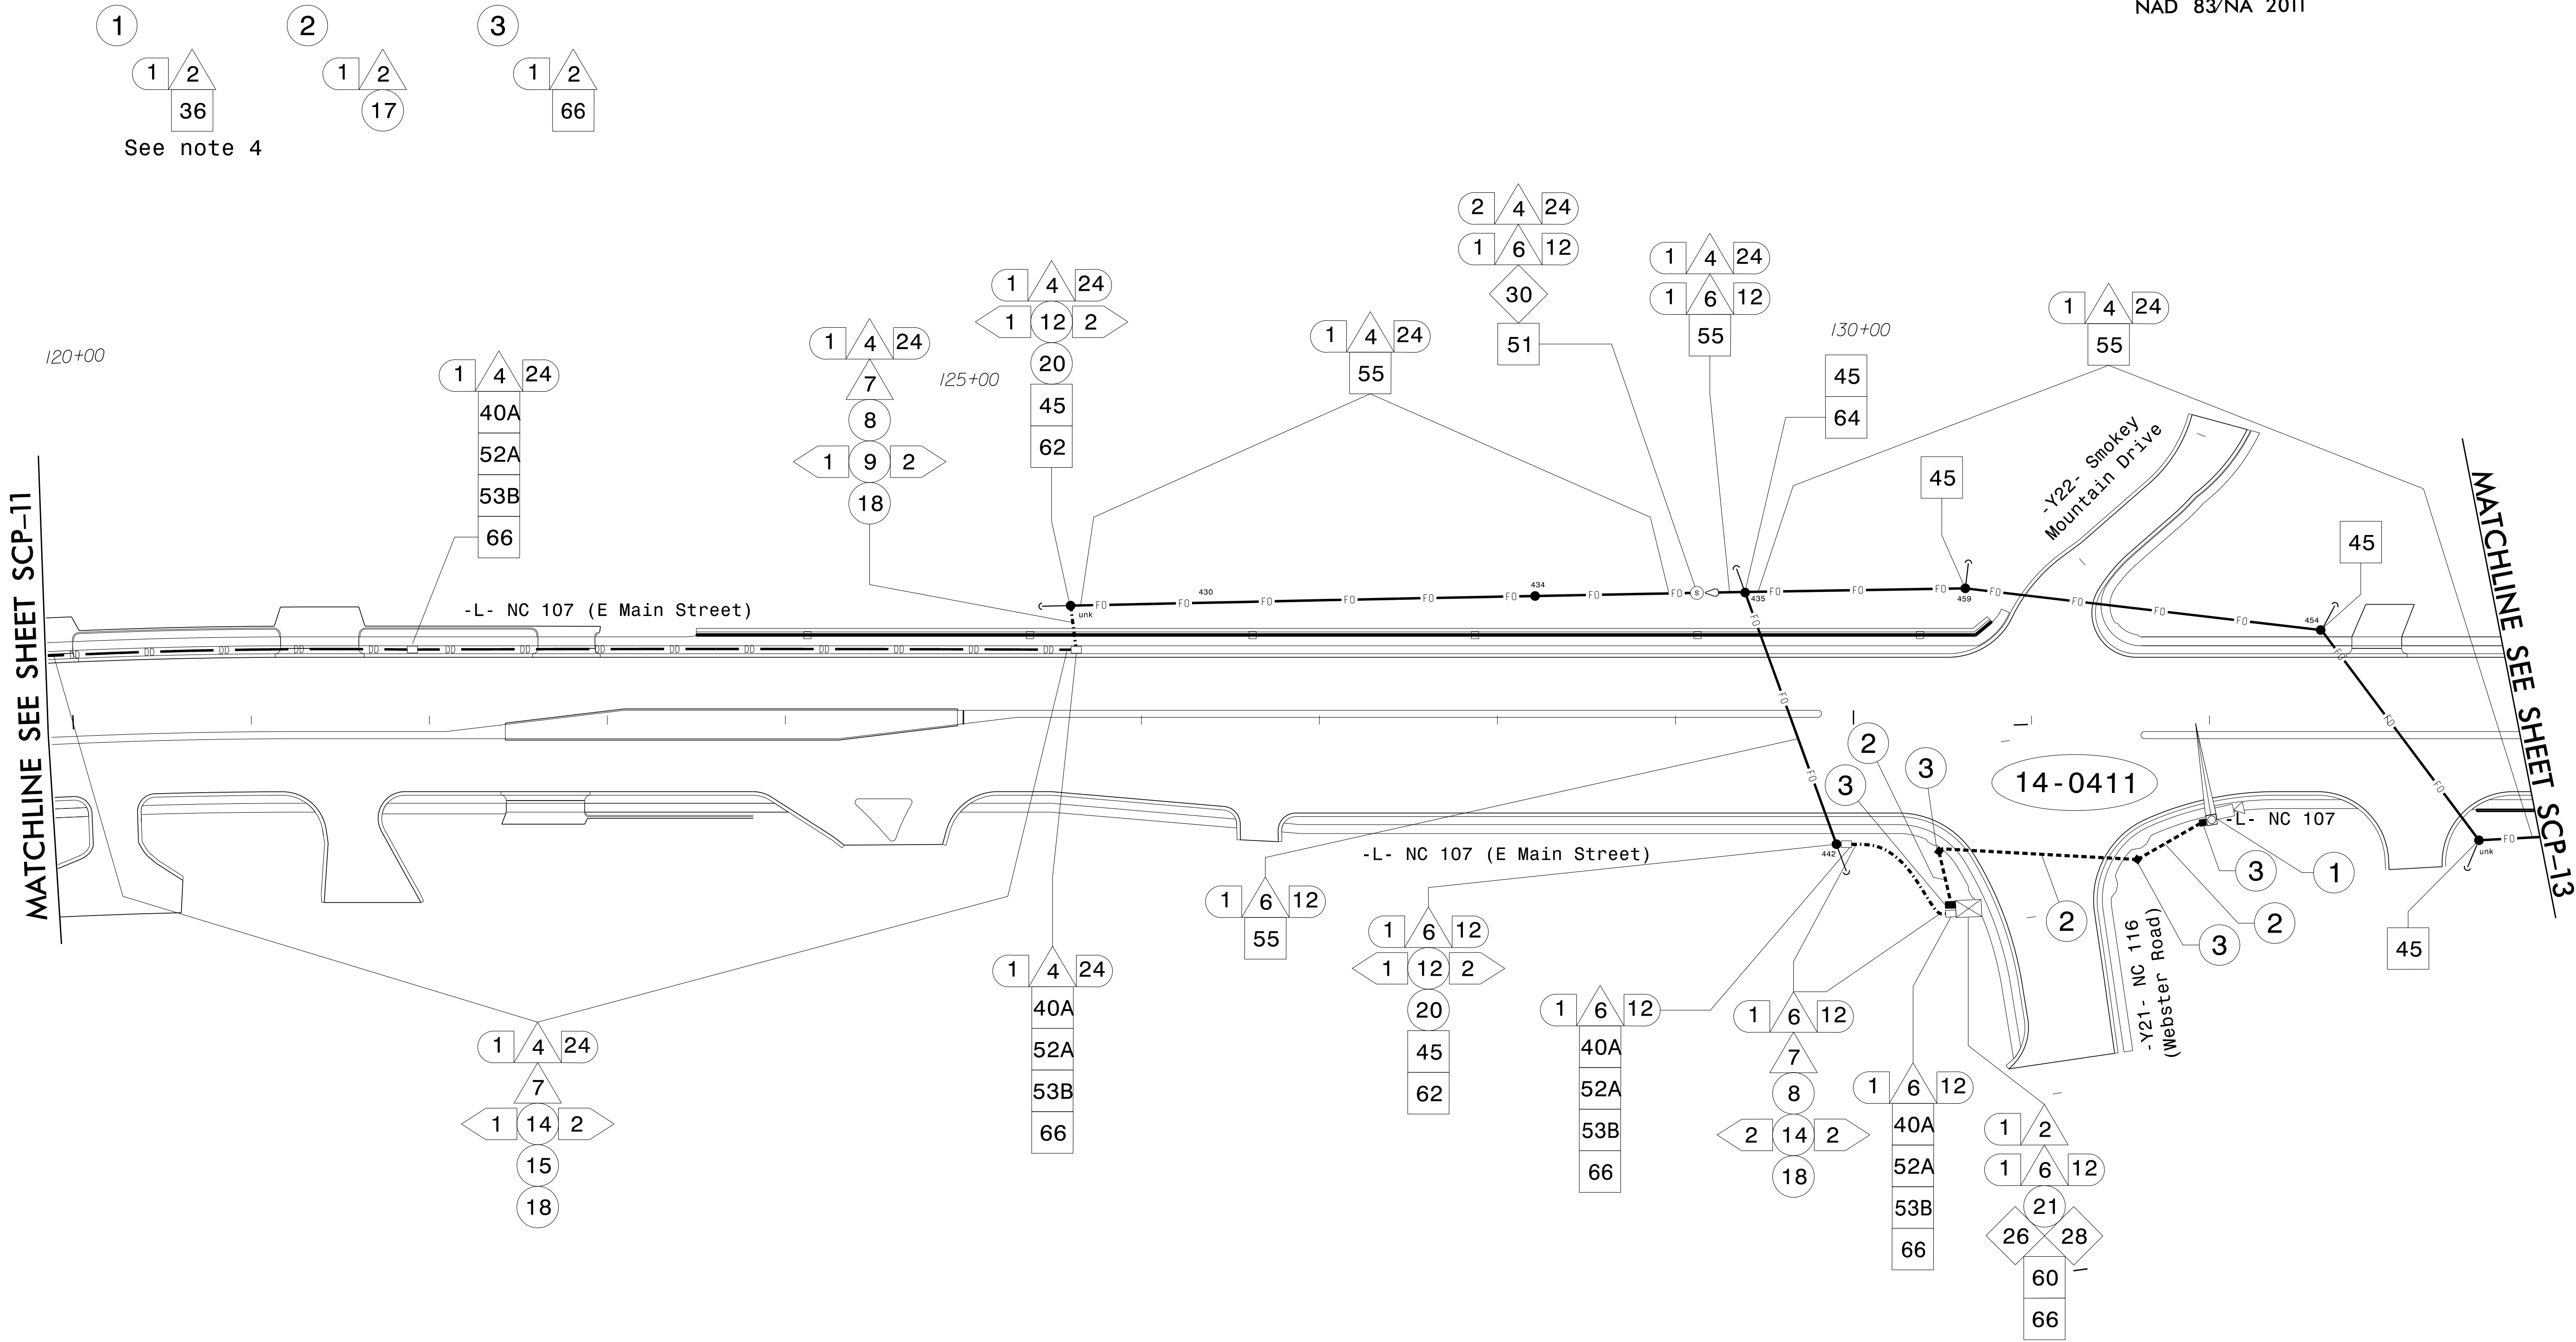




- NOTES:
1. UNLESS OTHERWISE NOTED:
 - OVERLASH NEW FIBER OPTIC CABLE TO EXISTING MESSENGER CABLE.
 2. SEAL ALL CONDUIT ENDS WITH DUCT AND CONDUIT SEALER, AT ALL JUNCTION BOX/CABINET ENTRANCES.
 3. ALTERNATE CONSTRUCTION METHODS MAY BE USED FOR INSALLING CONDUIT WITH ENGINEER'S APPROVAL. CONDUIT WILL BE PAID FOR UNDER INSTALLATION METHODS SHOWN ON THESE PLANS.
 4. WHEN INSTALLAING CCTV CAMERA ASSEMBLY ON METAL POLE WITH MAST ARM, RUN ETHERNET CABLE UP THROUGH POLE AND OUT THE MAST ARM: FIELD DRILL A 1/2" HOLE UP THROUGH THE BOTTOM OF THE MAST ARM FOR INSTALLATION OF THE ETHERNET CABLE TO THE CAMERA.

Plans Prepared By:

DRMP, INC.
8210 UNIVERSITY EXECUTIVE PARK DR.
SUITE 200
CHARLOTTE, NC 28262
NC LICENSE NO. F-1524 (704) 549-4260

Prepared for the Offices of:		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
		SEAL	
Division 14 Jackson County Sylva		NORTH CAROLINA PROFESSIONAL SEAL 052936 ENGINEER BRITTANY N. GROOM	
D14-14 NC 107 Cable Routing Plans		Signed by: <i>Brittany Groom</i> 8/26/2025	
PLAN DATE: June 2025 REVIEWED BY: BN Groom		DATE	
PREPARED BY: DJ White REVIEWED BY: LM Moon		DATE	
REVISIONS		INIT. DATE	