




1. UNLESS OTHERWISE NOTED:
 - OVERLASH NEW FIBER OPTIC CABLE TO EXISTING MESSENGER CABLE.
2. SEAL ALL CONDUIT ENDS WITH DUCT AND CONDUIT SEALER, AT ALL JUNCTION BOX/CABINET ENTRANCES.
3. ALTERNATE CONSTRUCTION METHODS MAY BE USED FOR INSTALLING CONDUIT WITH ENGINEER'S APPROVAL. CONDUIT WILL BE PAID FOR UNDER INSTALLATION METHODS SHOWN ON THESE PLANS.
4. WHEN INSTALLING CCTV CAMERA ASSEMBLY ON METAL POLE WITH MAST ARM, RUN ETHERNET CABLE UP THROUGH POLE AND OUT THE MAST ARM: FIELD DRILL A 1/2" HOLE UP THROUGH THE BOTTOM OF THE MAST ARM FOR INSTALLATION OF THE ETHERNET CABLE TO THE CAMERA.

Prepared for the Offices of:

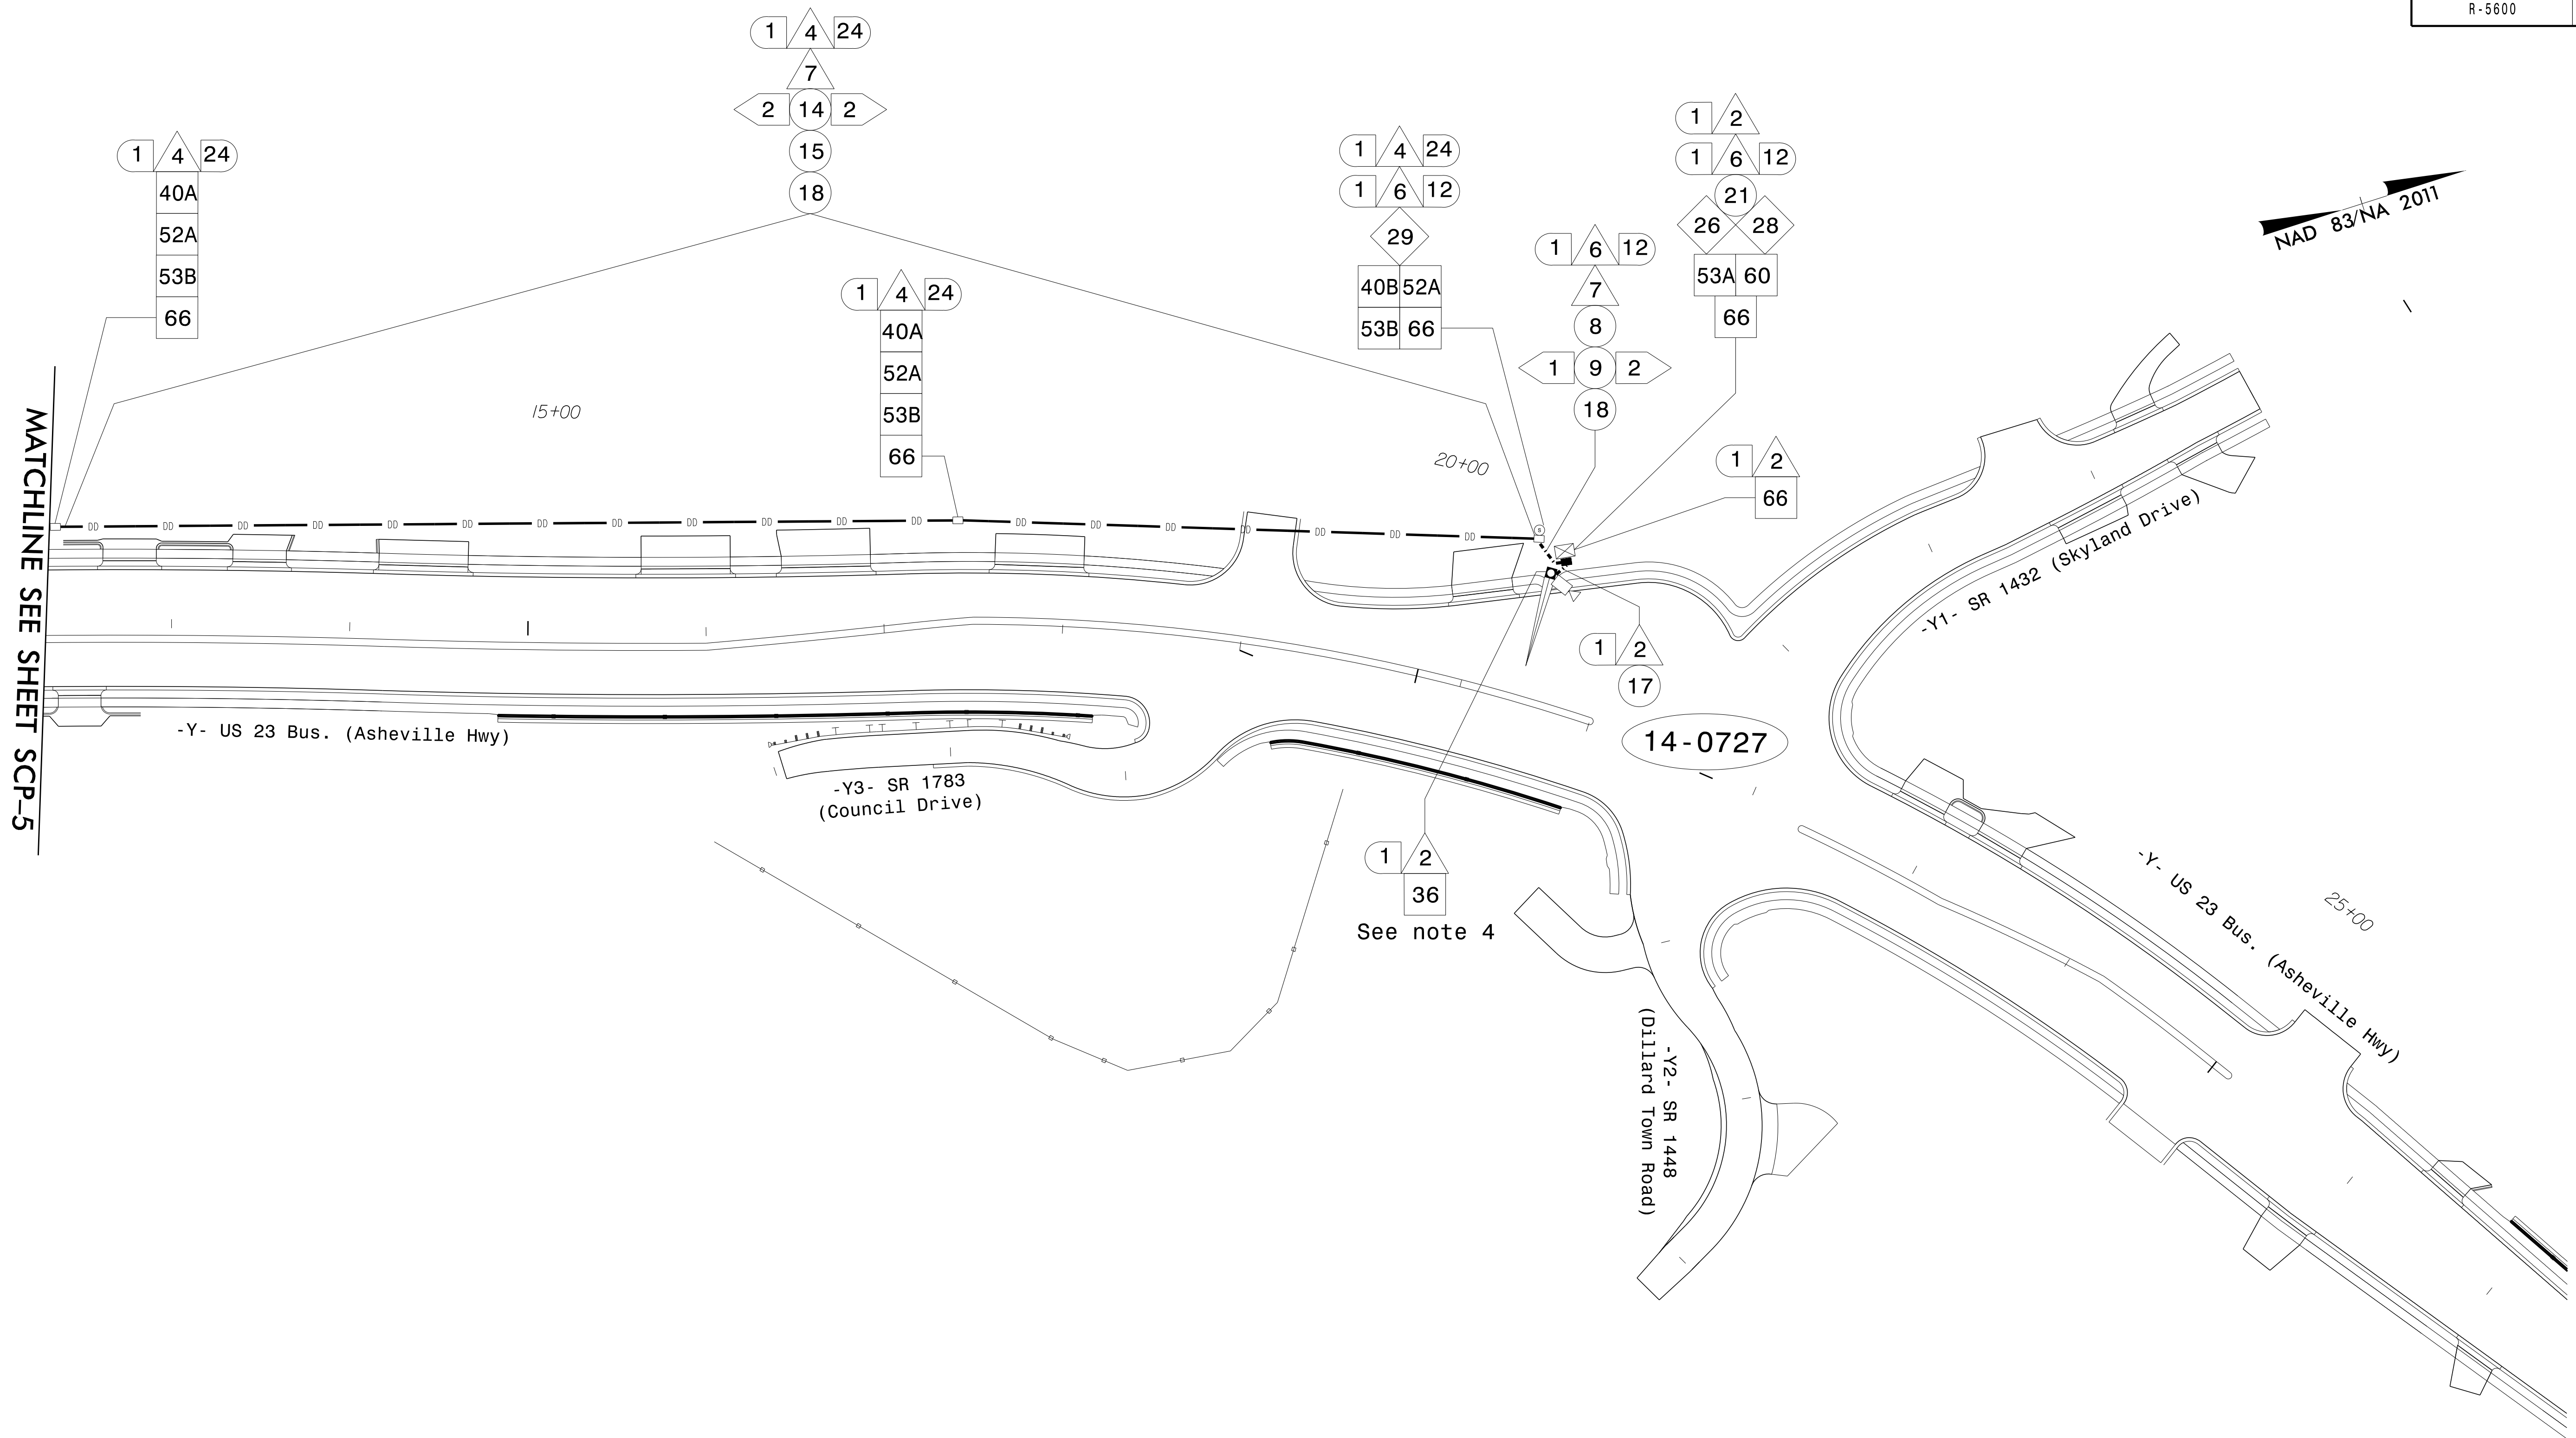

750 N. Greenfield Pkwy, Garner, NC

1/26/2025

/26/2025