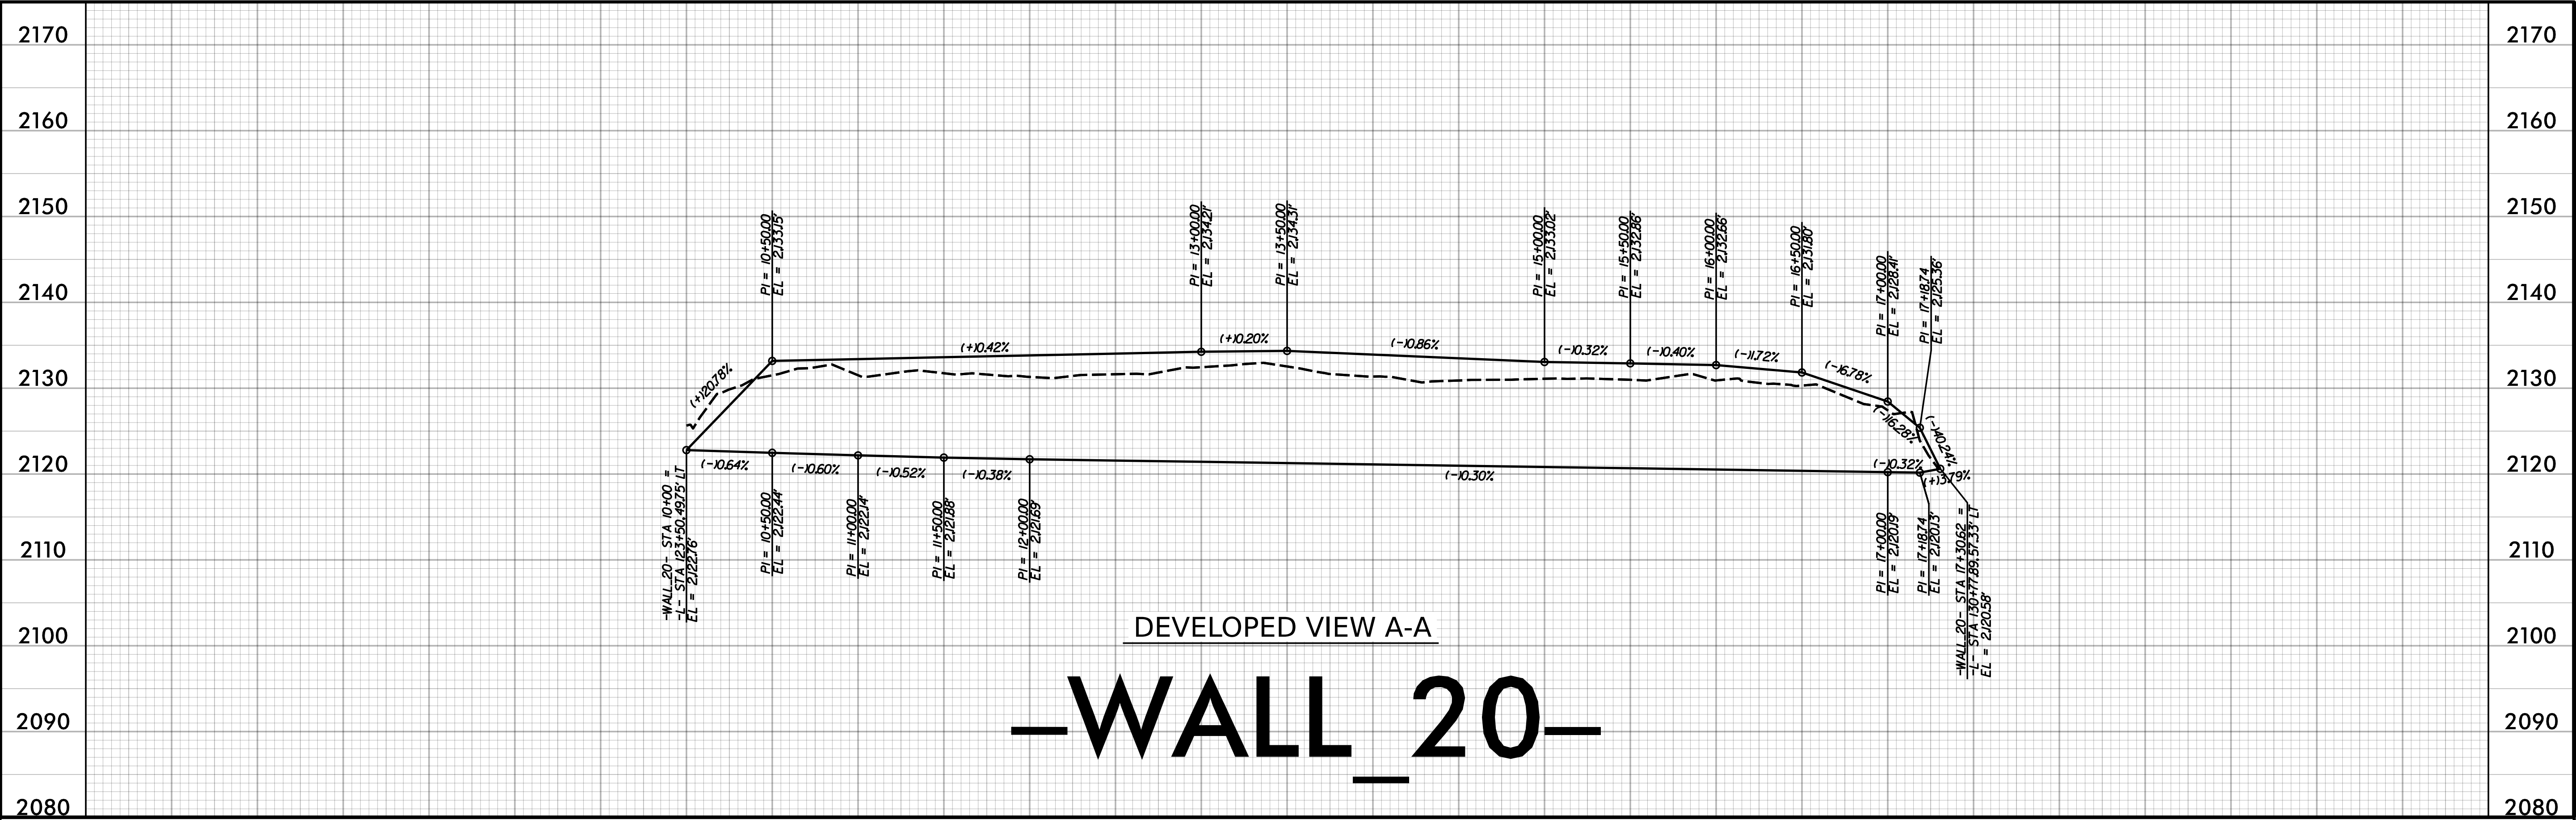


PLAN OF WALL 20

ESTIMATED SCULPTED SHOTCRETE SURFACE TREATMENT QUANTITIES (SQUARE FEET)	
SOIL NAIL WALL NO. 20	8,235 SF

ESTIMATED SOIL NAIL WALL QUANTITIES			
RETAINING WALL NO.	SOIL NAIL RETAINING WALLS (SQUARE FEET)	SOIL NAIL VERIFICATION TESTS	SOIL NAIL PROOF TESTS
20	8,235	2	17

NOTE: WALL ENVELOPE SHOWN IS BASED ON APPROXIMATE TOP OF WALL AND BOTTOM OF WALL ELEVATIONS PER ROADWAY PLANS. THE WALL ENVELOPE DEPICTED SHOWS THE APPROXIMATE EXPOSED FACE OF THIS WALL. SEE STRUCTURAL DESIGN PLANS FOR FINAL WALL DESIGN, INCLUDING TOP OF WALL, BOTTOM OF WALL, AND FOOTING ELEVATIONS. WALL STRUCTURAL DESIGN PLANS SHALL BE PROVIDED BY THE CONTRACTOR PER COORDINATION AND DESIGN FROM THE WALL MANUFACTURER AND/OR SUPPLIER.

WALL STRUCTURE DESIGN NOTE:
-WALL 20- ALIGNMENT IS SET AT THE BACK OF SIDEWALK (OFFSET VARIES; SEE PLANS). WALL STRUCTURE DESIGN SHALL OFFSET THE ALIGNMENT, AS REQUIRED, TO SPECIFY THE ACTUAL FACE OF WALL OFFSET FROM THE -WALL_20- ALIGNMENT TO MAINTAIN THE CLEAR SIDEWALK WIDTH (OFFSET VARIES; SEE PLANS).

PROJECT NO. **R-5600**
JACKSON COUNTY
STATION: **10+00.00 -WALL_20-**

REVISIONS						SHEET NO. W-24
NO.	BY:	DATE:	NO.	BY:	DATE:	
1	--	--	3	--	--	TOTAL SHEETS
2	--	--	4	--	--	46

DES BY: <u>A. SNIDER</u>	DATE : <u>02/25</u>	DWG BY: <u>B. PETERSON</u>	DATE : <u>02/25</u>
DES CHK: <u>E. BROOKS</u>	DATE : <u>05/25</u>	CHK BY: <u>A. SNIDER</u>	DATE : <u>05/25</u>

HDR HDR Engineering, Inc. of the Carolinas
555 Fayetteville St., Suite 900 Raleigh, N.C. 27601
N.C.B.E.L.S. License Number: F-0116

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

