

CONTRACT: C204764

SIGNING PLAN ROBESON COUNTY

LOCATION: BRIDGE NO. 770175 OVER LUMBER RIVER ON SR 1600

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -
PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C.,
DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE
CONSIDERED A PART OF THESE PLANS:

<u>STD. NO.</u>	<u>TITLE</u>
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	212	L.F.
4102000000	904	SIGN ERECTION, TYPE E	10	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED).....	2	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE E (GROUND MOUNTED).....	6	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	2	EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	8	EA.


- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
SIGN-1	TITLE SHEET
SIGN-2	E & F SIGN SHEETS
SIGN-3 & 4	SIGNING PLAN SHEETS

PLAN SUBMITTED TO:

Mitch Eaton, P.E. Signing & Delineation Regional Engineer

Andrew Scott Signing & Delineation Design Engineer

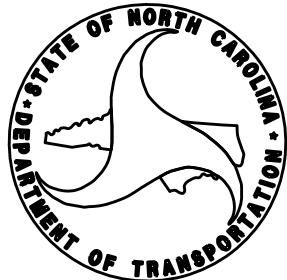

Stantec Consulting Services Inc.
801 Jones Franklin Road
Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

PLAN PREPARED BY: *Stantec Consulting Services, Inc.*

<u>Jay Woolard, PE</u>	Senior Transportation Engineer
<u>Regina Muncey, PE</u>	Senior Transportation Engineer
<u>James Hambright</u>	Senior Transportation Technician



TIP NO.	SHEET NO.
B-5985B	SIG-N 1
Documented by: <i>Kyma M. Muncy</i> CITE518022454FA.	
APPROVED:	
DATE:	2/11/2025
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
 Stantec	

TIP NO.
B-5985B

SHEET NO.
SIGN-3

APPROVED:

Regina M. Muncy
C7FE51B522454FA...


DATE: 2/11/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
43239
ENGINEER
REGINA M. MUNCY

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

Stantec

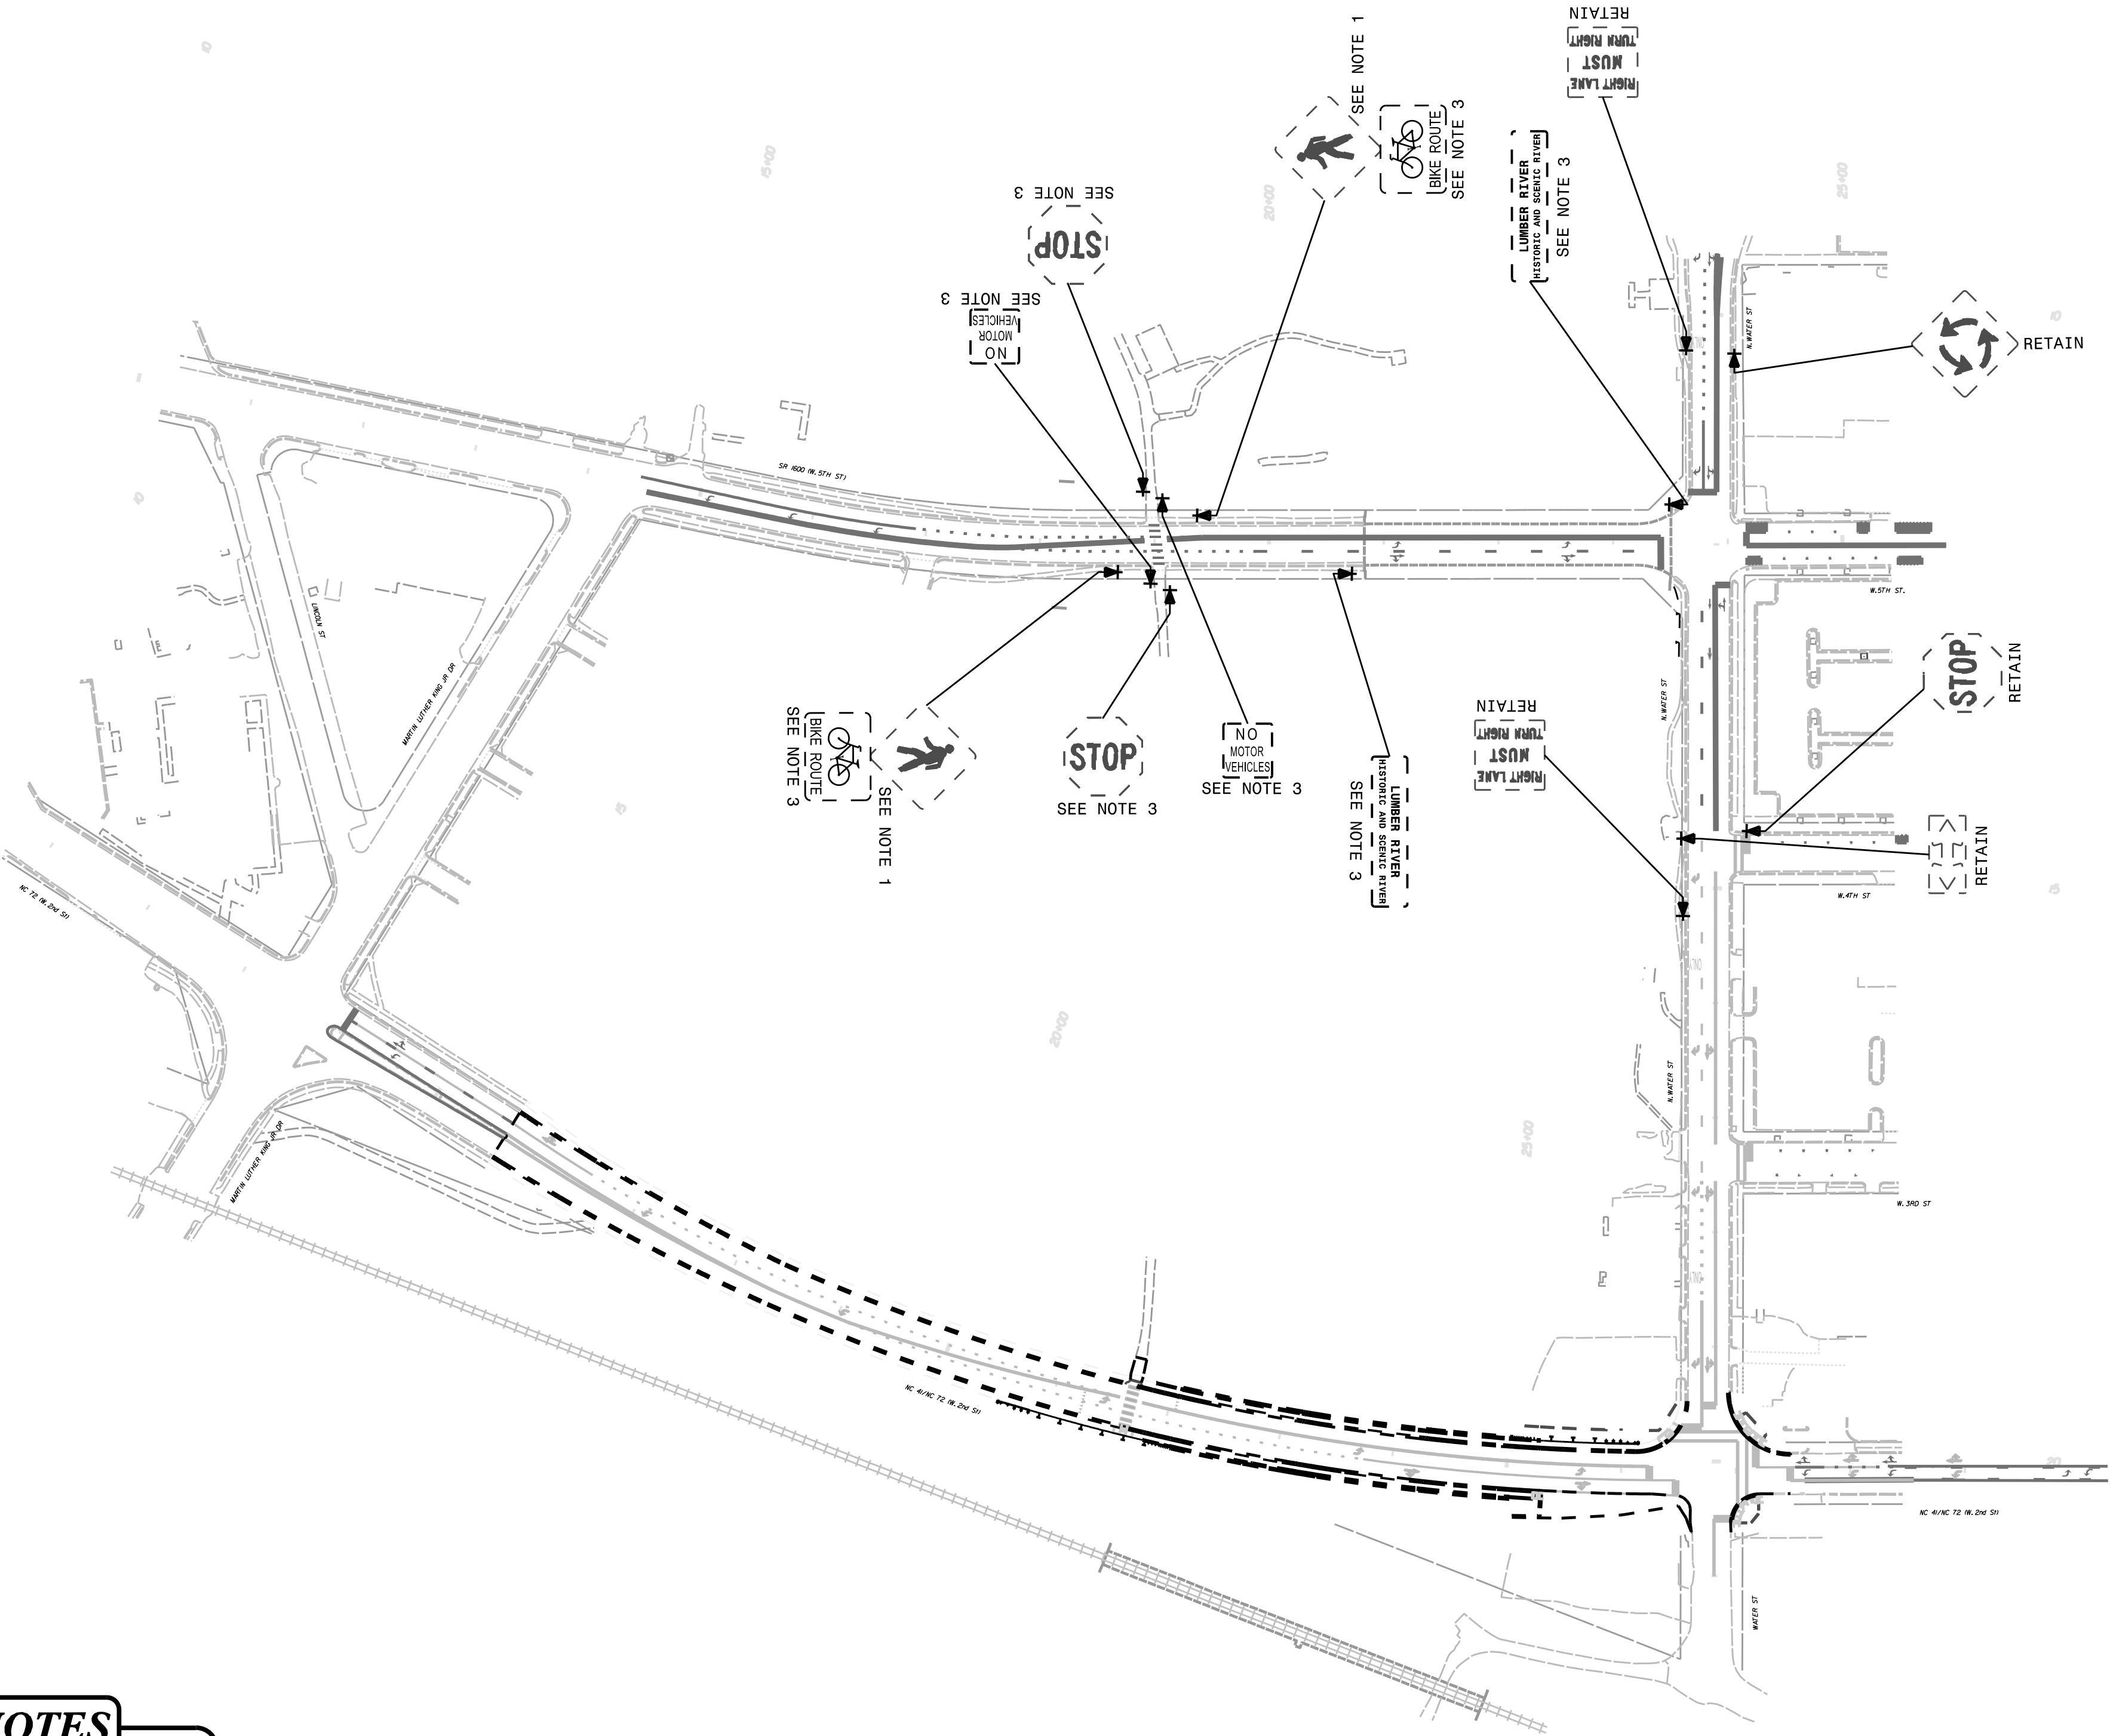

PROJECT NOTES

- 1 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 2 DISPOSAL OF SIGN SYSTEM, WOOD
- 3 DISPOSAL OF SUPPORT, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, WOOD
- 5 SIGN ERECTION, TYPE A (GROUND MOUNTED)
- 6 SIGN ERECTION, TYPE B (GROUND MOUNTED)
- 7 SIGN ERECTION, TYPE D, E, AND F
- 8 SIGN ERECTION, RELOCATE TYPE D (GROUND MOUNTED)
- 9 SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)
- * SIGN ERECTION, RELOCATE EXISTING SIGN AND DECORATIVE SUPPORT

EXISTING SIGNING

TIP NO.
B-5985B

SHEET NO.
SIGN-4

DESIGNED BY:
Regina M. Murrey
G7FE518522454FA...


APPROVED:


DATE:
2/11/2025

SEAL

SEAL
43239
ENGINEER
REGINA M. MURREY

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec

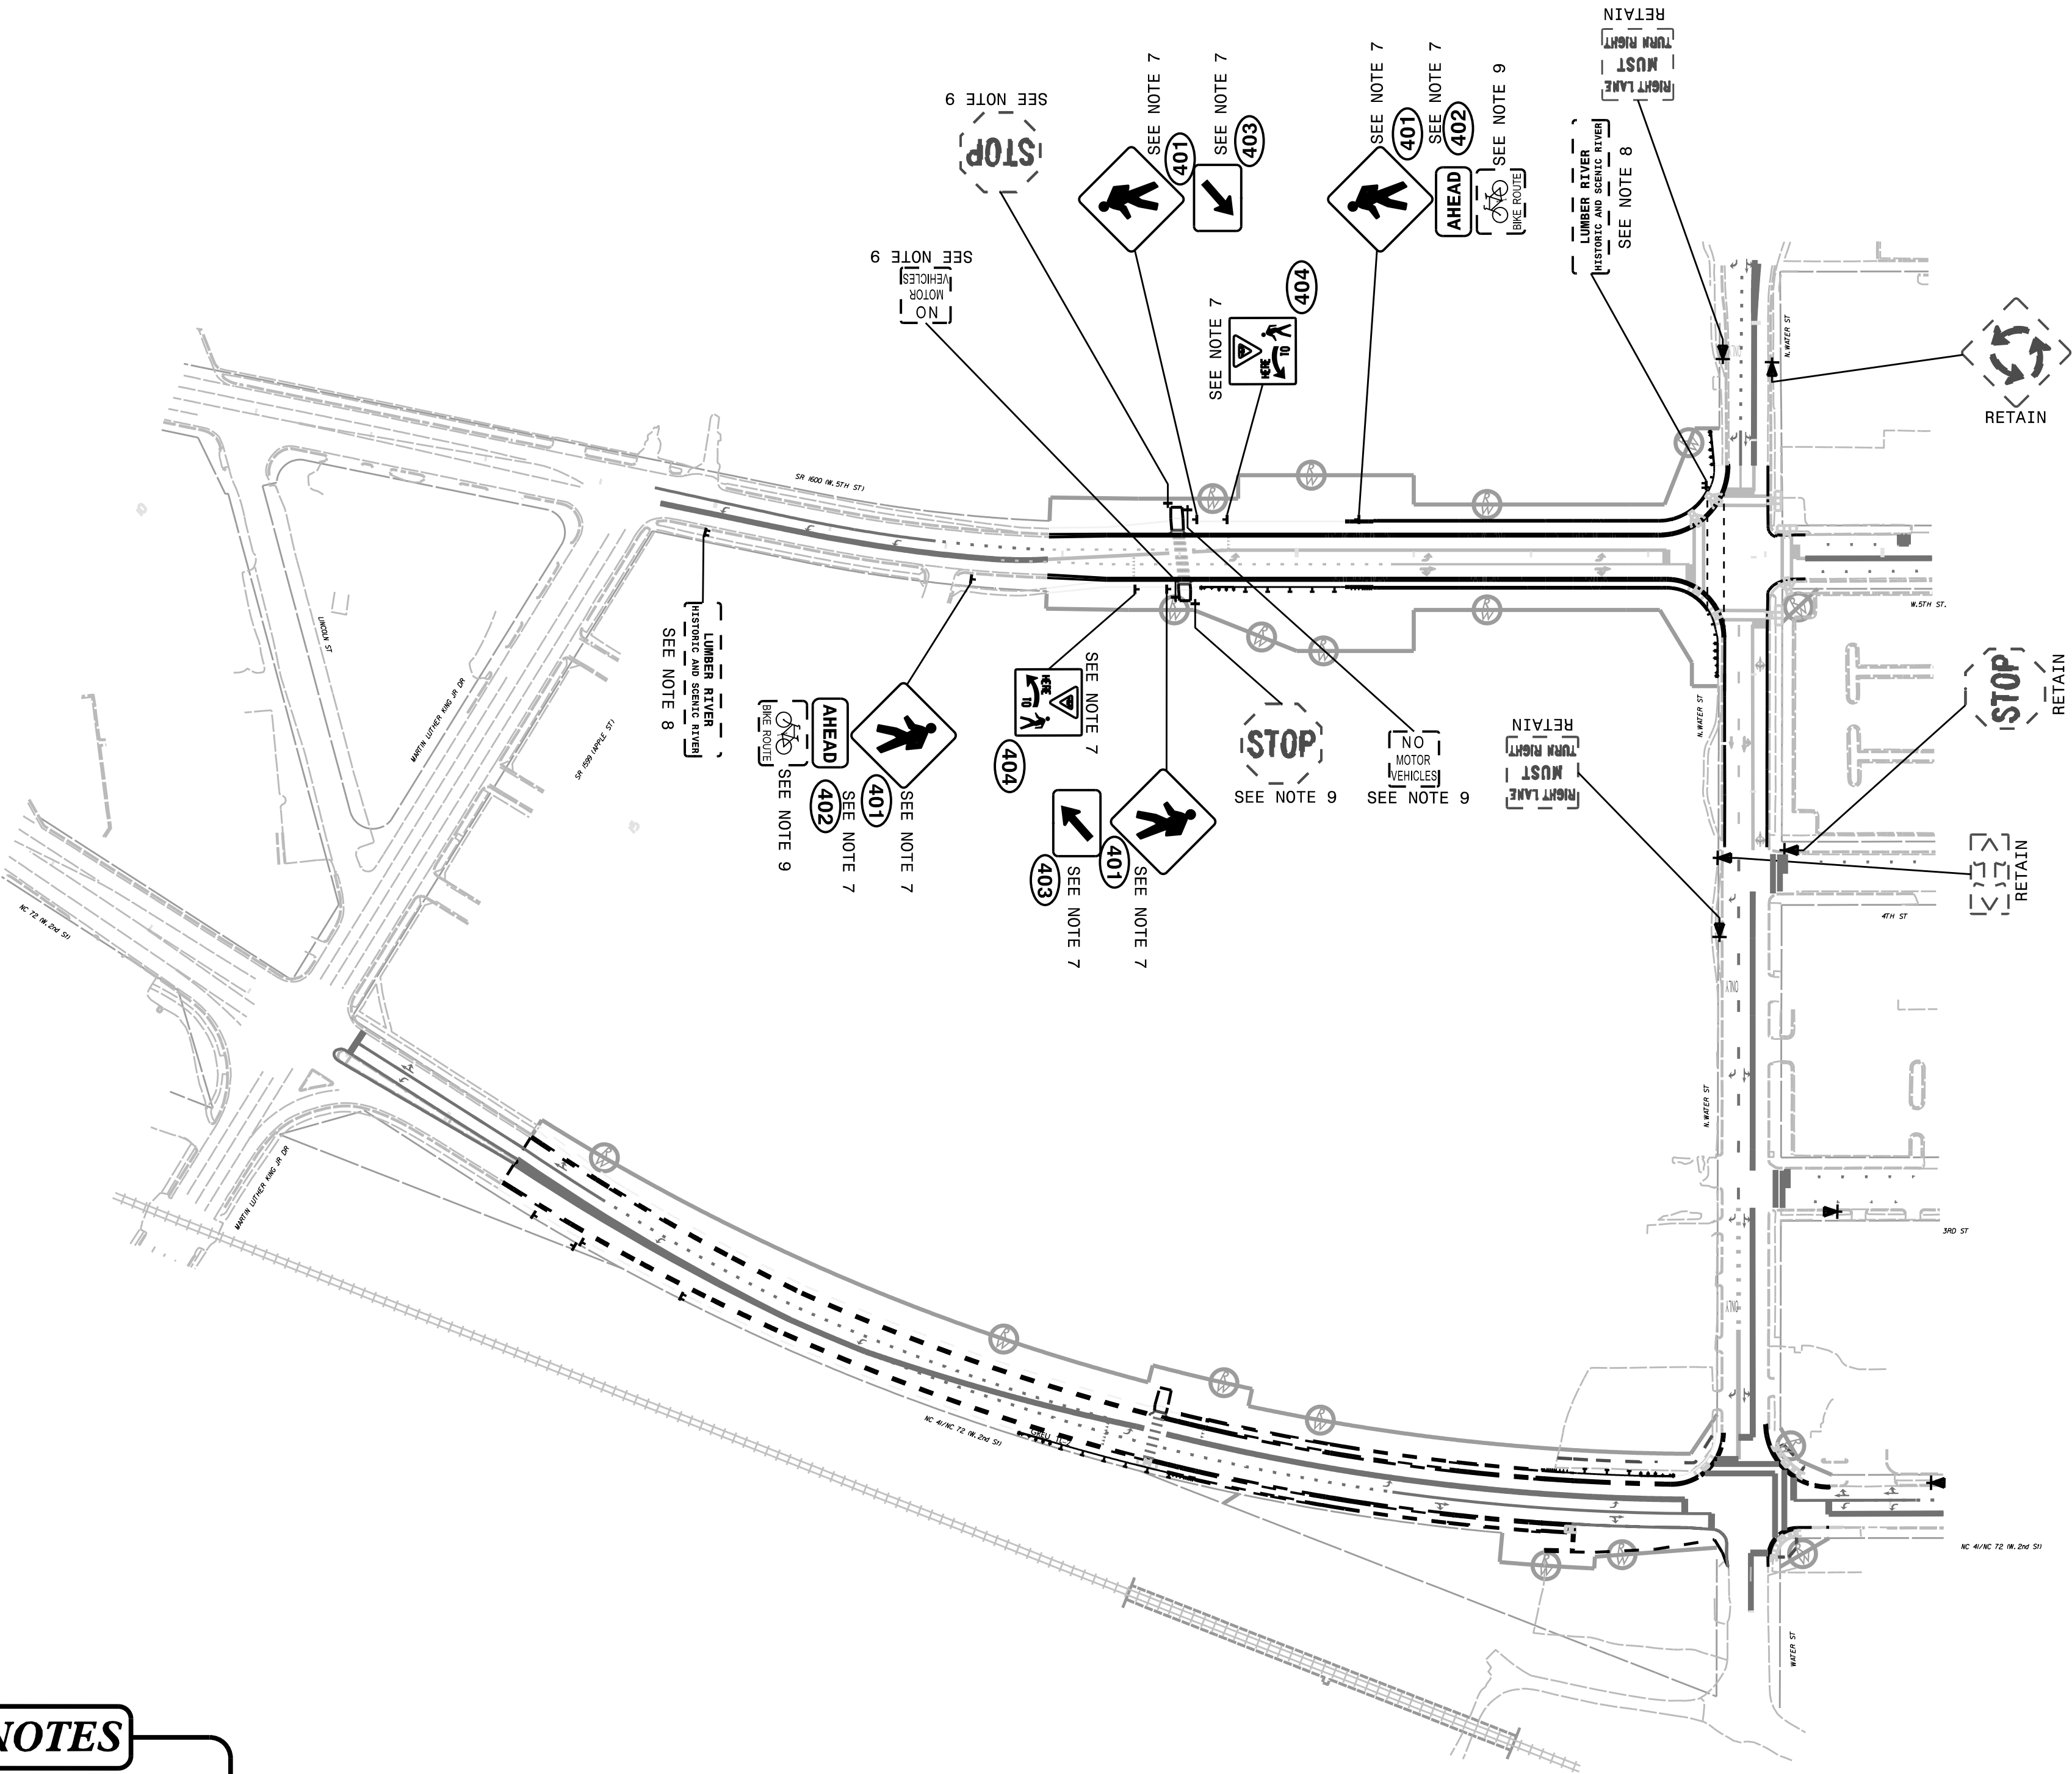

PROJECT NOTES

- DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- DISPOSAL OF SIGN SYSTEM, WOOD
- DISPOSAL OF SUPPORT, U-CHANNEL
- DISPOSAL OF SUPPORT, WOOD
- SIGN ERECTION, TYPE A (GROUND MOUNTED)
- SIGN ERECTION, TYPE B (GROUND MOUNTED)
- SIGN ERECTION, TYPE D, E, AND F
- SIGN ERECTION, RELOCATE TYPE D (GROUND MOUNTED)
- SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)
- SIGN ERECTION, RELOCATE EXISTING SIGN AND DECORATIVE SUPPORT

PROPOSED SIGNING