

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY
TO CLEAR ANCHOR BOLTS.


HOOKS ON "V" BARS MAY BE TURNED AS NECESSARY
FOR PLACING REINFORCING STEEL.

FOR DRILLED PIERS, SEE SECTION 411 OF THE STANDARD
SPECIFICATIONS.

★ INVERT ALTERNATE STIRRUPS.

THE LOCATION OF THE CONSTRUCTION JOINT IN THE DRILLED PIERS IS BASED ON AN APPROXIMATE GROUND LINE ELEVATION. IF THE CONSTRUCTION JOINT IS ABOVE THE ACTUAL GROUND LINE ELEVATION, THE CONTRACTOR SHALL PLACE THE CONSTRUCTION JOINT 1 FOOT BELOW THE GROUND LINE.


THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT THE LONGITUDINAL REINFORCEMENT FOR DRILLED PIERS IS DETAILED WITH 3 FEET OF EXTRA LENGTH.

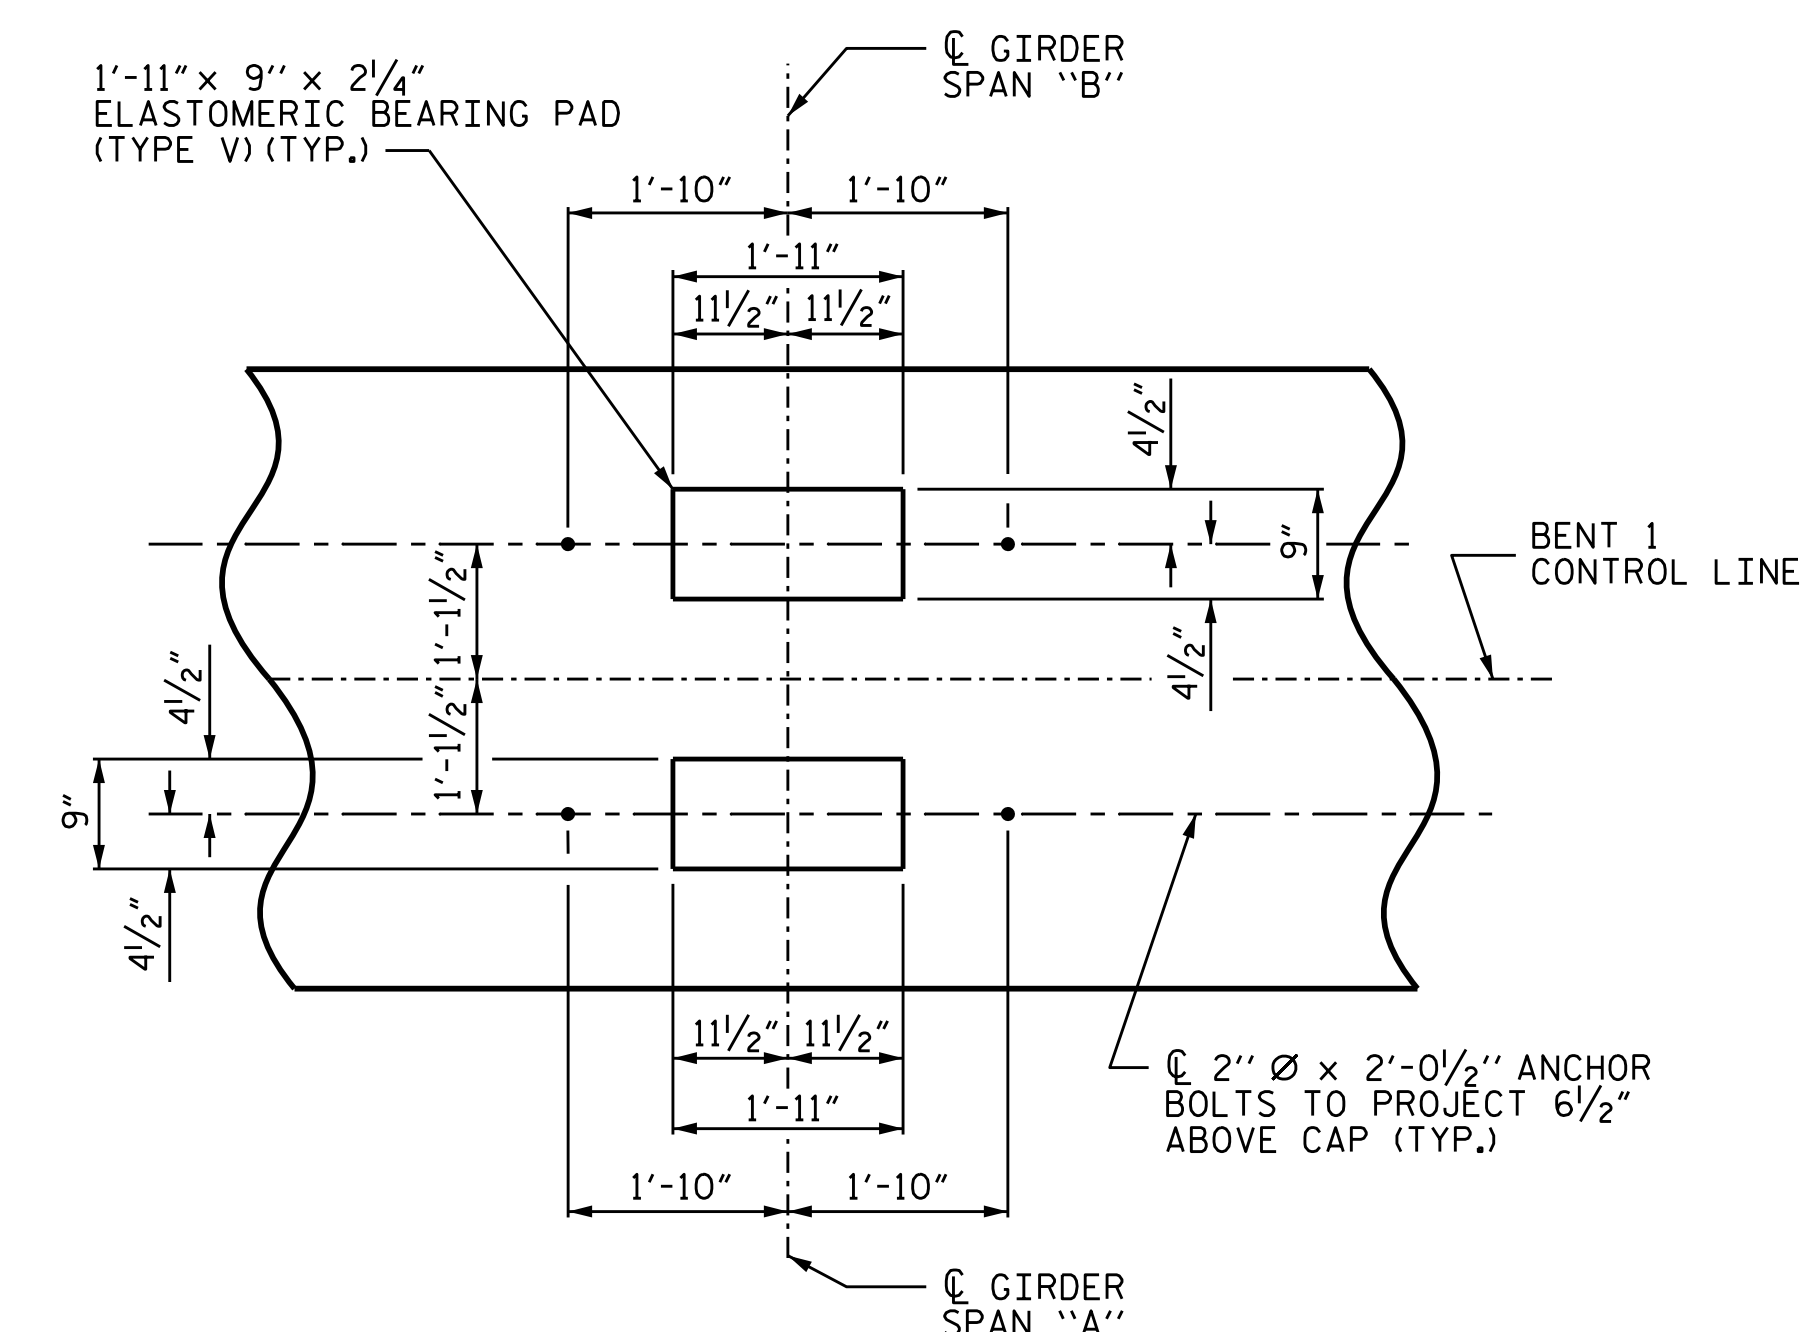

(TYP. EACH GIRDER)

PROJECT NO. B-5831
SURRY/YADKIN COUNTY
 STATION: 32+28.00 -L-

SHEET 1 OF 2

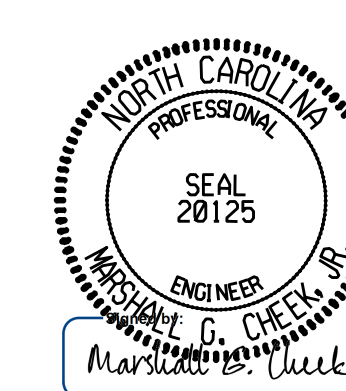

9/23/202

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

TGS ENGINEERS
706 HILLSBOROUGH STREET
SUITE 200
RALEIGH, NC 27603
PH (919) 773-8887
CORP. LICENSE NO.: C-027

REVISONS						SHEET NO. S-43
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS 61
2			4			



DIMENSIONS AND REINFORCING STEEL ARE TYPICAL FOR EACH COLUMN & DRILLED PIER EXCEPT AS NOTED.

DRAWN BY : STM DATE : 06/24
CHECKED BY : MGC DATE : 07/24
DESIGN ENGINEER OF RECORD: STM DATE : 12/24

12/18/2024
c:\workdir\ncdot-pw.bentley.com.ncdot-pw-01\zachary smith\d0166590\B-5831-SMU-B101-850006.dgn
ZSmith