

8/26/24

TOTAL BILL OF MATERIAL											
BRIDGE NO.	INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C	ASPHALT BINDER FOR PLANT MIX	GROOVING BRIDGE FLOORS	CLASS II SURFACE PREPARATION	SHOTCRETE REPAIRS	PEDESTRIAN PROTECTION	FIELD MEASURING	CLEANING AND PAINTING EXISTING WEATHERING STEEL FOR BRIDGE #_	CLEANING AND REPAINTING OF BRIDGE #_	POLLUTION CONTROL
	SQ. YDS.	TONS	TONS	SQ. FT.	SQ. YDS.	CU. FT.	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM
910001	450	51	4	16,754	0.5	1.2	LUMP SUM	-	LUMP SUM	-	LUMP SUM
910538	595	69	5	21,089	2.0	18.1	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM*
TOTAL	1,045	120	9	37,843	2.5	19.3	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM

TOTAL BILL OF MATERIAL												
BRIDGE NO.	PAINTING CONTAINMENT FOR BRIDGE #_	FOAM JOINT SEALS FOR PRESERVATION	LATEX MODIFIED CONCRETE OVERLAY- VERY EARLY STRENGTH	ELASTOMERIC CONCRETE FOR PRESERVATION	BRIDGE JOINT DEMOLITION	EPOXY COATING	BEAM REPAIR CUT-OUT	SCARIFYING BRIDGE DECK	HYDRO-DEMOLITION OF BRIDGE DECK	PLACING & FINISHING OF LATEX MODIFIED CONCRETE OVERLAY- VERY EARLY STRENGTH	TYPE II BRIDGE JACKING BRIDGE NO._	ELASTOMERIC BEARING, MODIFIED
	LUMP SUM	LIN. FT.	CU. YDS.	CU. FT.	SQ. FT.	SQ. FT.	LBS.	SQ. YDS.	SQ. YDS.	SQ. YDS.	EA.	EA.
910001	LUMP SUM	91.0	98.0	21.8	88	320	-	2,015.8	2,015.8	2,015.8	-	-
910538	LUMP SUM *	504.5	121.8	121.4	486	434	515	2,506.6	2,506.6	2,506.6	14	56
TOTAL	LUMP SUM	595.5	219.8	143.2	574	754	515	4,522.4	4,522.4	4,522.4	14	56


NOTE:

* BRIDGE 910358 CONSISTS OF PAINTED STEEL BEAMS AND WEATHERING STEEL BEAMS. REFER TO THE SPECIAL PROVISIONS “PAINTING EXISTING STRUCTURE” AND “PAINTING EXISTING WEATHERING STEEL STRUCTURE” TO DETERMINE THE REQUIREMENTS FOR EACH BEAM TYPE FOR THE BID ITEMS “POLLUTION CONTROL” AND “PAINTING CONTAINMENT FOR BRIDGE #_”.

AT THE TIME OF PREPARATION OF THESE PLANS, IT WAS NOT ANTICIPATED THAT THE ITEM(S) LISTED BELOW WOULD BE REQUIRED. HOWEVER, IT MAY BE DETERMINED IN THE FIELD THAT THE FOLLOWING ITEM(S) LISTED, OR OTHER WORK WILL BE NECESSARY TO PROPERLY COMPLETE THE INTENDED BRIDGE PRESERVATION/REHABILITATION WORK. THE CONTRACTOR SHALL BE PREPARED TO PERFORM SUCH WORK IN A TIMELY MANNER, AS DETERMINED IN THE FIELD. SUCH WORK SHALL BE CONSIDERED EXTRA WORK AND SHALL BE ADDRESSED AS PER ARTICLE 104-7 OF THE STANDARD SPECIFICATIONS. PROJECT SPECIAL PROVISIONS THAT OUTLINE REQUIREMENTS FOR THESE POTENTIAL ADDITIONAL WORK ITEMS HAVE BEEN PROVIDED IN THE PROJECT DOCUMENTS, BUT NO QUANTITIES HAVE BEEN LISTED. ACTUAL PAY ITEMS, QUANTITIES, AND COSTS WILL BE ESTABLISHED, AS REQUIRED, IF EXTRA WORK IS ENCOUNTERED.

UNANTICIPATED ITEMS:
CLASS III SURFACE PREPARATION
VOLUMETRIC MIXER
TYPE I BRIDGE JACKING BRIDGE NO. __

PROJECT NO. **15BPR.144**
WAKE COUNTY
BRIDGE: **910001**
910538

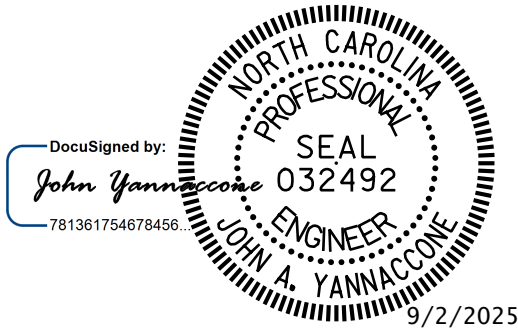

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

TOTAL BILL OF MATERIAL

DRAWN BY : J. MYA DATE : 9/2024
CHECKED BY : J. YANNACCONE DATE : 9/2024



REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			5-1
2			4			TOTAL SHEETS 30

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED