

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
ROCKINGHAM COUNTY

LOCATION: FUTURE I-73 /US 220 AT US 311 /NC 135 INTERCHANGE

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -
PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C.,
DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE
CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.10	TYPE A SIGNS
901.50	ARROWS AND SHIELDS
901.70	SIGN STRINGERS AND SUPPORT SPACING
902.10	FOUNDATIONS FOR GROUND MOUNTED SIGNS
903.10	GROUND MOUNTED SIGN SUPPORTS
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.30	SUPPLEMENTAL SIGN MOUNTING
904.50	MOUNTING OF TYPE 'D', 'E', AND 'F' SIGNS ON 'U' CHANNEL SUPPORTS
910.20	SIGNING SCHOOL ZONE

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . DO NOT BEGIN FABRICATION FOR TYPES A & B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL "S" DIMENSIONS HAVE BEEN FIELD VERIFIED.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE INSTALLATION AND DETAILS.

SUMMARY OF QUANTITIES


ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4054000000-E	902	PLAIN CONCRETE SIGN FOUNDATIONS	1	CY
4072000000-E	903	SUPPORTS, BREAKAWAY STEEL BEAM	1103	LBS
4072000000-E	903	SUPPORTS, 3 LB STEEL U CHANNEL	631	LF
4096000000-N	904	SIGN ERECTION TYPE D	10	EA
4102000000-N	904	SIGN ERECTION TYPE E	35	EA
4108000000-N	904	SIGN ERECTION TYPE F	10	EA
4110000000-N	904	SIGN ERECTION, TYPE A (GROUND MOUNTED)	6	EA
4138000000-N	907	DISPOSAL OF SUPPORT, STEEL BEAM	6	EA
4155000000-N	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	43	EA
4155000000-N	907	DISPOSAL OF SIGN, D, E, OR F	6	EA
4360000000-N	SP	SUPPORTS, OMNI-DIRECTIONAL BREAKAWAY	4	EA

INDEX

SHEET NO.	DESCRIPTION
SIGN-1-1B	TITLE, SPECIAL DETAIL, & SUPPORT INFORMATION
SIGN-2-2B	SIGN DESIGNS
SIGN-3-3A	TYPE E & F SIGNS
SIGN-4-8	EXISTING SIGNS
SIGN-9-13	PROPOSED SIGNS


PLAN SUBMITTED TO: NCDOT SIGNING AND DELINEATION UNIT


Kelvin L. Jordan SIGNING & DELINEATION REGIONAL ENGINEER
Walter R. Johnson SIGNING & DELINEATION PROJECT DESIGN ENGINEER

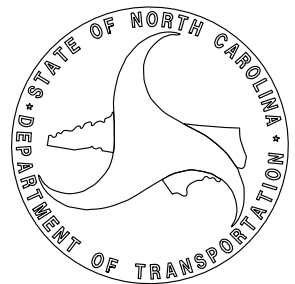

PLAN PREPARED BY: JOHNSON, MIRMIRAN, & THOMPSON, INC.

Charles Young, PE PROJECT ENGINEER
Dane Fredde PROJECT DESIGN ENGINEER

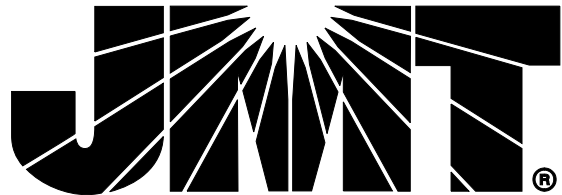

TIP NO.	SHEET NO.
I-5898	SIGN-1
APPROVED:  84880GCF32044421	
DATE: 10/20/2025	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

NOTES:

- DESIGN CONFORMS WITH THE SPECIFICATIONS FOR THE DESIGN AND CONSTRUCTION OF STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS - AASHTO.
- USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
- USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO ASTM A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH ASTM F2329 OR B695 CLASS 55.
- USE BACKING PLATES, SLIP BASE PLATES, FRICTION PLATES, AND HINGE PLATES THAT CONFORM TO ASTM A-36 AND THAT ARE GALVANIZED IN ACCORDANCE WITH ASTM A-123 PRIOR TO GALVANIZING, GRIND SMOOTH ANY METAL PROJECTION BEYOND THE PLATE FACE.
KEEPER PLATES SHALL BE MANUFACTURED FROM 28 GAUGE SHEET STEEL THAT CONFORMS TO ASTM A-36 AND IS GALVANIZED IN ACCORDANCE WITH ASTM A-123
- ASSEMBLE HINGE CONNECTIONS IN THE SHOP. THE SHOP SHALL TIGHTEN BOLTS BY USE OF EITHER A CALIBRATED POWER WRENCH OR A MANUAL TORQUE WRENCH. TIGHTEN EACH HINGE CONNECTION BOLT TO 1/3 PAST SNUG.
- BASE PLATES DETAILS ARE FOR INSTALLATIONS ON THE RIGHT SHOULDER AND IN GORE AREAS.
- ASSEMBLE UPPER SUPPORT TO STUB AS SHOWN IN DETAIL. SLIP BASE PLATES SHALL BE FILLET WELDED ONTO SUPPORTS ALL AROUND THE STRUCTURAL SHAPE SO AS TO INSURE NO LOSS OF STRENGTH. ASSEMBLE IN EITHER SHOP OR FIELD. 28 GAUGE KEEPER PLATE IS PLACED BETWEEN SLIP BASE PLATES TO PREVENT BOLT SLIPPING. TIGHTEN BOLTS TO THE FOLLOWING PRESCRIBED TORQUE:

BOLT DIAMETER	TORQUE (LB. FT.)
1/2"	9
5/8"	22
3/4"	37
1"	48

COMPLETELY ASSEMBLE BREAKAWAY SUPPORTS PRIOR TO ERECTION. BREAKAWAY SUPPORT TO BE SET IN ONE PIECE. AFTER SUPPORT HAS BEEN ERECTED AND THE CONCRETE FOOTINGS HAS CURED AT LEAST 48 HOURS, CLEAN CONCRETE FROM BASE CONNECTION BOLTS THEN LOOSEN AND RE TIGHTEN EACH BOLT IN A SYSTEMATIC ORDER TO THE PRESCRIBED TORQUE.DO NOT OVER TIGHTEN. BURR ALL BOLT THREADS OF BASE CONNECTIONS TO PREVENT LOOSENING.

- ELIMINATE HINGE CONNECTION FOR ALL SINGLE SUPPORT SIGNS.
- DETAIL IS FOR ONE DIRECTION BREAKAWAY. WHEN PLANS REQUIRE A TWO DIRECTION BREAKAWAY, TWO FRICTION PLATES SHALL BE USED IN LIEU OF ONE FRICTION PLATE AND ONE HINGE PLATE.

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
GROUND MOUNTED SIGN SUPPORTS

SHEET 3 OF 3
903D1003



10/20/2025

**CONTRACTS STANDARDS
AND DEVELOPMENT UNIT**
Office 919-707-8950 FAX 919-250-4119


SEE TITLE BLOCK

ORIGINAL BY: **R.S. GALLO** DATE: **05-22-2025**
MODIFIED BY: DATE:
CHECKED BY: DATE:
FILE SPEC.:

TIP NO.
I-5898

SHEET NO.
SIGN-1B

APPROVED:


I-5898/CF-32044421...

DATE:

10/20/2025

SEAL




DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

Version: 3.2 Posted: 7/5/2023

SIGN					ROADWAY STATION	NUMBER OF SUPPORTS	BEAM SECTION	SUPPORT TYPE BA or S	OMNI COUPLER	ATTACHMENT METHOD	MOUNTING METHOD	HORIZONTAL CLEARANCE* (ft.)	SUPPORT SPACING	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			SUPPORT WEIGHTS		FOOTINGS				FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)					
														SNS HT	MTG HT	EMBED- MENT												DIAMETER	DEPTH	REINFORCED	PLAIN						
NUMBER	TYPE	SIZE (in.)												w	x	h	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	B/A (lbs.)	SIMPLE (lbs.)	(ft.)	(ft.)	(c.y.)	(c.y.)						
901	B	72	x	48	RP A 10+47	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	4.00	7.00	2.5	4.37	15.37	17.87	0.00	0.00	0.00	2.22	13.22	15.72	227.46	0	1.0	3	0.00	0.17						
902	A	72	x	60	RP A 11+47	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	5.00	7.00	2.5	1.72	13.72	16.22	0.00	0.00	0.00	2.30	14.30	16.80	224.21	0	1.0	3	0.00	0.17						
903	B	72	x	48	RP A 12+47	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	4.00	7.00	2.0	1.72	12.72	14.72	0.00	0.00	0.00	2.30	13.30	15.30	207.11	0	1.0	2.5	0.00	0.15						
904	B	72	x	48	RP C 12+46	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	4.00	7.00	2.0	2.22	13.22	15.22	0.00	0.00	0.00	2.65	13.65	15.65	211.96	0	1.0	2.5	0.00	0.15						
905	A	72	x	60	RP C 13+46	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	5.00	7.00	2.5	2.22	14.22	16.72	0.00	0.00	0.00	3.13	15.13	17.63	231.80	0	1.0	3	0.00	0.17						
906	B	72	x	48	RP C 14+96	2	S3x5.7	BA	N/A	N/A	N/A	18.00	3.52	4.00	7.00	2.5	2.22	13.22	15.72	0.00	0.00	0.00	3.13	14.13	16.63	220.39	0	1.0	3	0.00	0.17						
																										TOTAL	TOTAL					TOTAL	TOTAL				
																										1102.55	0.00					0.00	0.81				
USE:																										1103.00	0.00					0.00	1.00				

NOTES

1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
2. FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

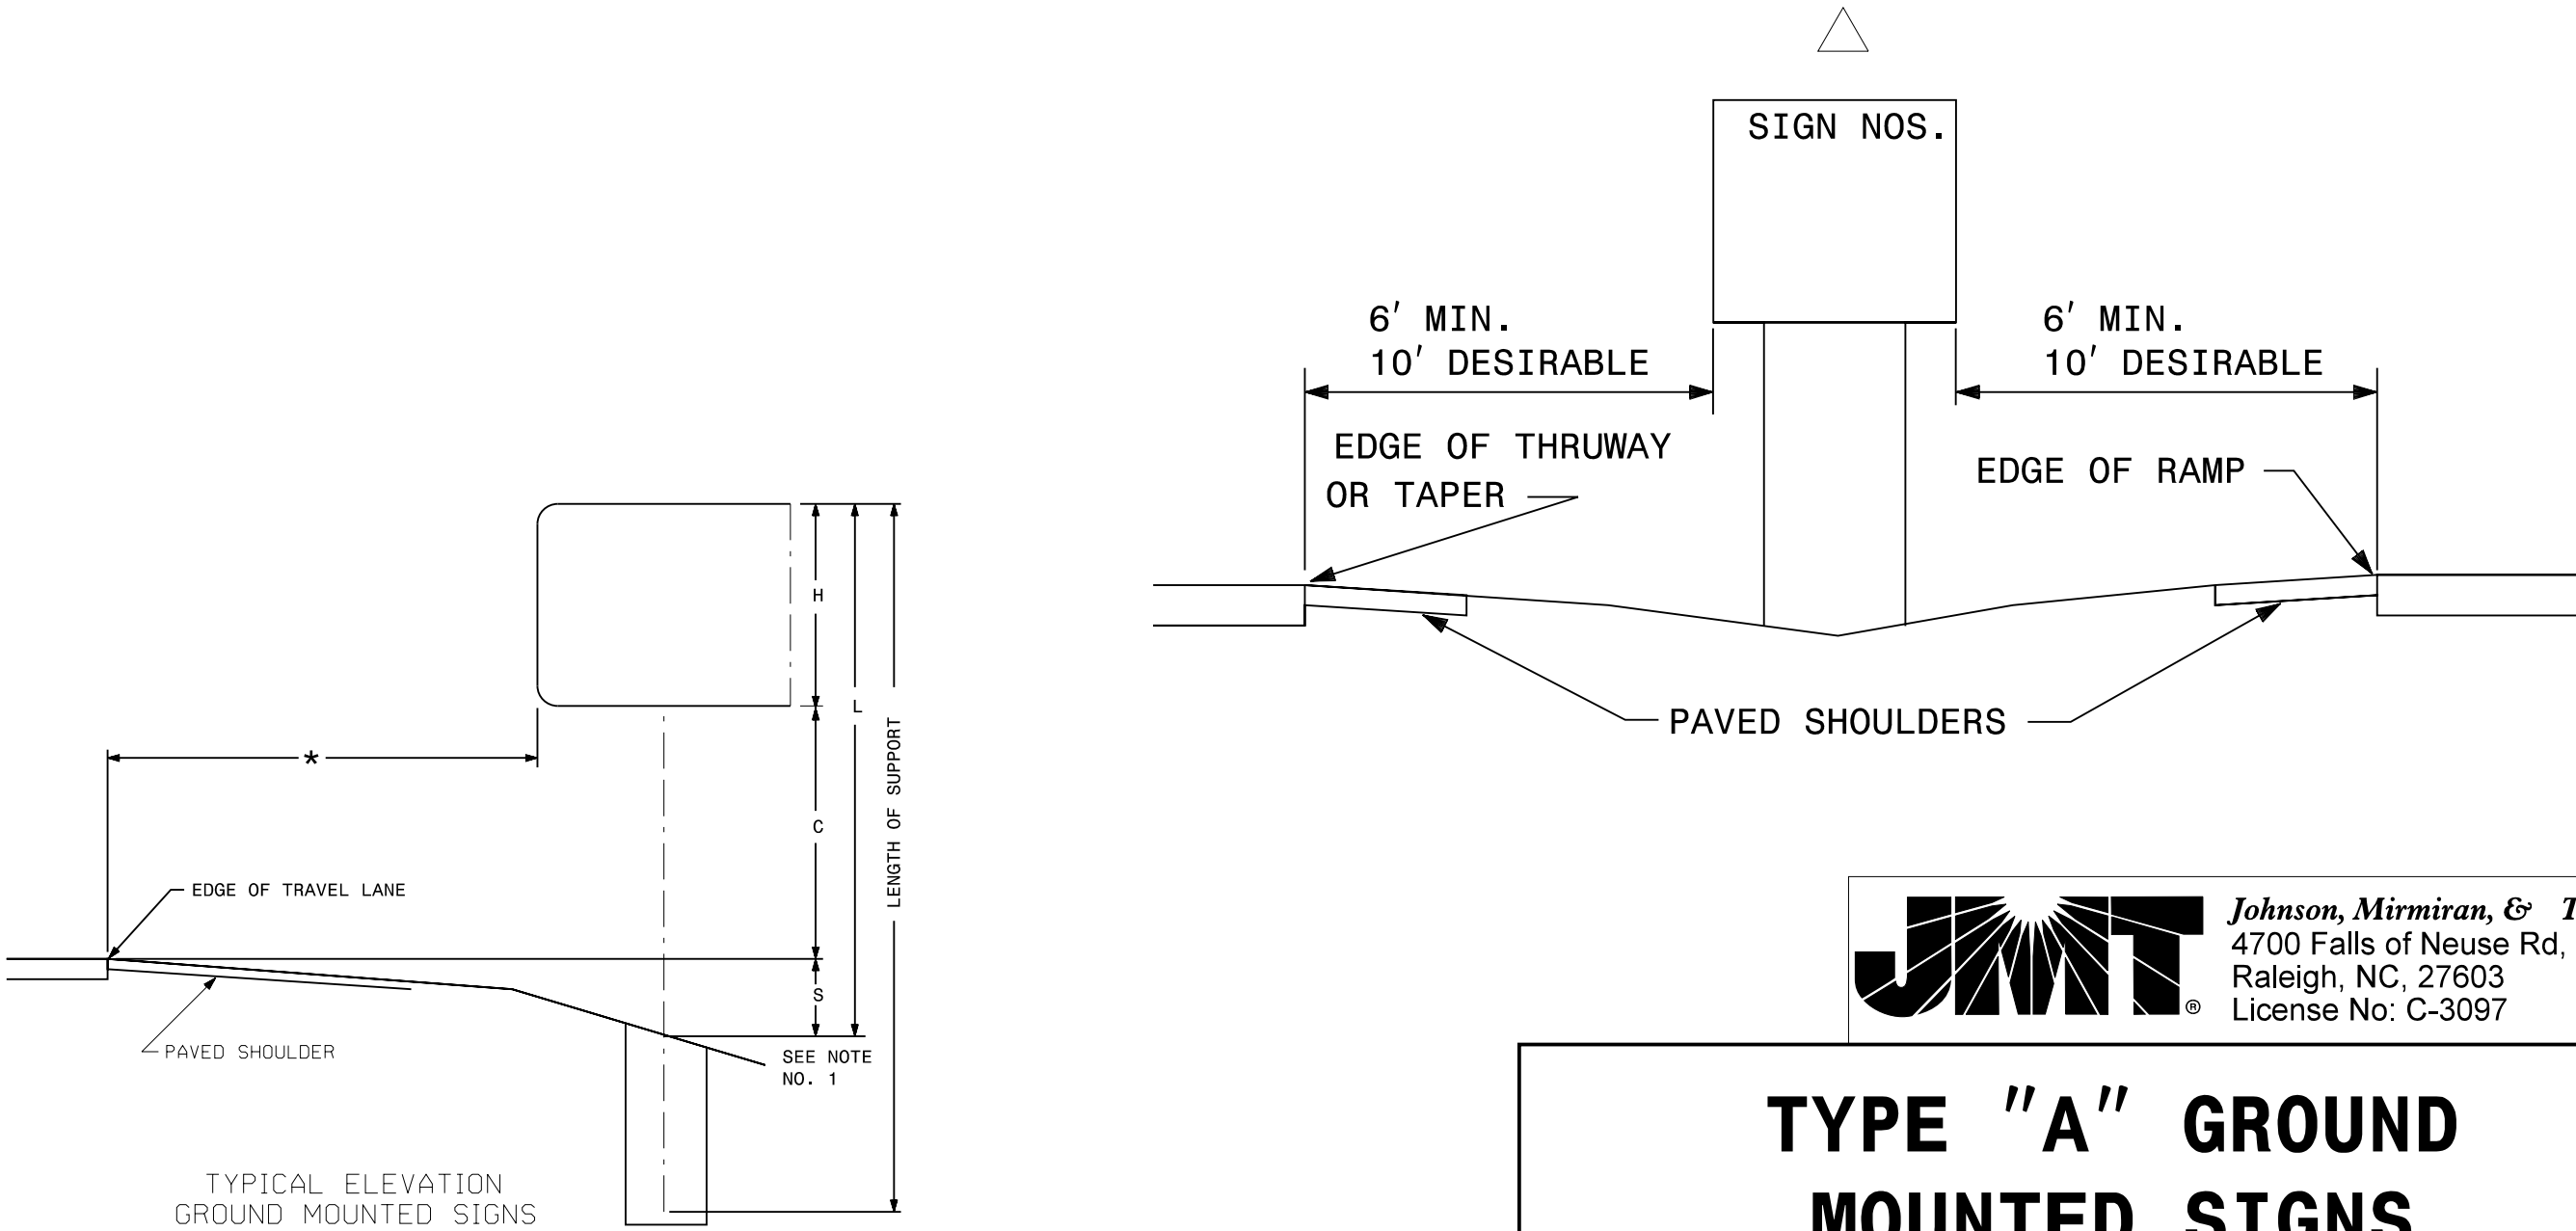

SIGN NUMBER:301
TYPE:D
QUANTITY:1
SIGN WIDTH:5'-0"
HEIGHT:2'-6"
TOTAL AREA:12.5 Sq.Ft.
BORDER TYPE:FLUSH
RECESS:0"
WIDTH:0.75"
RADII:2.25"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White
SYMBOLX Y WID HT
AR_Type D6.619.369
AR_Type D44.44.869
MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DAF
PROJECT ID: I-5898
CHECKED BY: CJY
Sep 10, 2021
DIV: 7

LETTER POSITIONS
Letter locations are panel edge to lower left corner
Series/Size Text Length
D 2000 16.9
D 2000 31.7
NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER:303
TYPE:D
QUANTITY:1
SIGN WIDTH:4'-6"
HEIGHT:2'-6"
TOTAL AREA:11.3 Sq.Ft.
BORDER TYPE:FLUSH
RECESS:0"
WIDTH:0.75"
RADII:3"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White
SYMBOLX Y WID HT
AR_Type D23.2457.5
MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DAF
PROJECT ID: I-5898
CHECKED BY: CJY
Sep 10, 2021
DIV: 7

LETTER POSITIONS
Letter locations are panel edge to lower left corner
Series/Size Text Length
D 2000 36.2
D 2000 44.9
NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER:302
TYPE:D
QUANTITY:1
SIGN WIDTH:5'-0"
HEIGHT:2'-6"
TOTAL AREA:12.5 Sq.Ft.
BORDER TYPE:FLUSH
RECESS:0"
WIDTH:0.75"
RADII:2.25"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White
SYMBOLX Y WID HT
AR_Type D6.619.369
AR_Type D44.44.869
MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DAF
PROJECT ID: I-5898
CHECKED BY: CJY
Sep 10, 2021
DIV: 7

LETTER POSITIONS
Letter locations are panel edge to lower left corner
Series/Size Text Length
D 2000 31.7
D 2000 16.9
NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER:304
TYPE:D
QUANTITY:1
SIGN WIDTH:4'-6"
HEIGHT:2'-6"
TOTAL AREA:11.3 Sq.Ft.
BORDER TYPE:FLUSH
RECESS:0"
WIDTH:0.75"
RADII:3"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White
SYMBOLX Y WID HT
AR_Type D23.2457.5
MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DAF
PROJECT ID: I-5898
CHECKED BY: CJY
Sep 10, 2021
DIV: 7

LETTER POSITIONS
Letter locations are panel edge to lower left corner
Series/Size Text Length
D 2000 36.2
D 2000 44.9
NORTH CAROLINA D.O.T. SIGN DETAIL



TIP NO.
I-5898
SIGNED BY: [Signature]
APPROVED:
DATE: 10/20/2025

SHEET NO.
SIGN-2

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 046062 ENGINEER CHARLES J. YOUNG

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

[illegible][illegible][illegible][illegible]

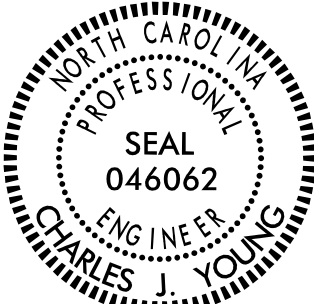TIP NO. I-5898	SHEET NO. SIGN-2A
Signed by: 	
APPROVED: _____ SARADOC-F3204842.1	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

[illegible]


Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097



SIGN DESIGNS


401 QUANTITY REQ'D 1 SPEED LIMIT 35 24" X 30" R2-1 ONE "U" POST PER SIGN	406 QUANTITY REQ'D 2 ←ONE WAY 48" X 18" R6-1 L MOUNT BACK TO BACK WITH SIGN 405 IN 2 INSTALLATIONS	411 QUANTITY REQ'D 1 ↙ 21" X 15" W16-7P MOUNT BELOW SIGN 410 IN 1 INSTALLATION	416 QUANTITY REQ'D 1 ↘ 21" X 15" W16-7P MOUNT BELOW SIGN 410 IN 1 INSTALLATION	TIP NO. I-5898 SHEET NO. SIGN-3 APPROVED: Signature 8480D6F82D44421 DATE: 10/20/2025 SEAL Seal 046062 ENGINEER CHARLES J. YOUNG DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED
402 QUANTITY REQ'D 4 ↗ 24" X 30" R4-7 ONE "U" POST PER SIGN NOTE: SIGN R4-7 WILL BE INSTALLED AT A MINIMUM OF 10 FT FROM THE NOSE OF AN ISLAND.	407 QUANTITY REQ'D 4 WRONG WAY 36" X 24" R5-1a ONE "U" POST PER SIGN	412 QUANTITY REQ'D 2 → 21" x 15" M6-1 R MOUNT BELOW SIGNS 408 & 409 IN 2 INSTALLATIONS	417 QUANTITY REQ'D 1 RIGHT LANE MUST TURN RIGHT 30" X 30" R3-7 ONE "U" POST PER SIGN	
403 QUANTITY REQ'D 2 STOP 36" X 36" R1-1 ONE "U" POST PER SIGN	408 QUANTITY REQ'D 2 ⚠ 24" X 24" RS-117 MOUNT BELOW SIGNS 303 & 304 IN 2 INSTALLATIONS	413 QUANTITY REQ'D 2 ← 21" x 15" M6-1 L MOUNT BELOW SIGNS 408 & 409 IN 2 INSTALLATIONS	418 QUANTITY REQ'D 1 END SCHOOL ZONE 24" X 30" S5-2 ONE "U" POST PER SIGN	
404 QUANTITY REQ'D 4 DO NOT ENTER 30" X 30" R5-1 ONE "U" POST PER SIGN	409 QUANTITY REQ'D 2 ✈ 24" X 24" I3-5 MOUNT BELOW SIGNS 303 & 304 IN 2 INSTALLATIONS	414 QUANTITY REQ'D 1 SCHOOL 24" x 9" S4-3P MOUNT BELOW SIGN 415 IN 1 INSTALLATION		
405 QUANTITY REQ'D 2 ONE WAY 48" X 18" R6-1 R TWO "U" POST PER SIGN	410 QUANTITY REQ'D 2 ⚠ 30" X 30" W11-2 ONE "U" POST PER SIGN	415 QUANTITY REQ'D 1 ⚠ 36" X 36" S1-1 ONE "U" POST PER SIGN		

9/3/2025 3:59:32 PM
I:\15898-sgn-ps-h-3.dgn
User:dlredda


501 JCT JCT 220 311 2 – M2-1P 21" x 15" 2 – M1-4 30" x 24" TWO "U" POST PER SIGN	505 SOUTH SOUTH 220 311 ← ← 2 – M3-2P 24" x 12" 2 – M1-4 30" x 24" 2 – M6-1 L 21" x 15" TWO "U" POST PER SIGN	509 JCT 220 1 – M2-1P 21" x 15" 1 – M1-4 30" x 24" ONE "U" POST PER SIGN
502 SOUTH 311 ← SOUTH NORTH 220 220 ↙ → 1 – M3-2P 24" x 12" 1 – M1-4 30" x 24" 1 – M5-1 L 21" x 15" 2 – M3-2P 24" x 12" 2 – M1-4 30" x 24" 1 – M5-1 L 21" x 15" 1 – M6-1 R 21" x 15" TWO "U" POST PER SIGN	506 NORTH 220 ← 1 – M3-2P 24" x 12" 1 – M1-4 30" x 24" 1 – M6-1 L 21" x 15" ONE "U" POST PER SIGN	510 WEST 135 1 – M3-2P 24" x 12" 1 – M1-5 24" x 24" ONE "U" POST PER SIGN
503 NORTH SOUTH 220 220 ↙ → NORTH SOUTH 311 311 ↑ → 2 – M3-2P 24" x 12" 2 – M1-4 30" x 24" 1 – M5-1 L 21" x 15" 1 – M6-1 R 21" x 15" 2 – M3-2P 24" x 12" 2 – M1-4 30" x 24" 1 – M6-3 21" x 15" 1 – M6-1 R 21" x 15" TWO "U" POST PER SIGN	507 NORTH EAST 311 135 2 – M3-2P 24" x 12" 1 – M1-4 24" x 24" 1 – M1-5 30" x 24" TWO "U" POST PER SIGN	
504 NORTH 311 ← EAST WEST 135 135 ← → 1 – M3-2P 24" x 12" 1 – M1-4 30" x 24" 1 – M6-1 L 21" x 15" 2 – M3-2P 24" x 12" 2 – M1-5 24" x 24" 1 – M6-1 L 21" x 15" 1 – M6-1 R 21" x 15" TWO "U" POST PER SIGN	508 NORTH 311 → WEST EAST 135 135 ← → 1 – M3-2P 24" x 12" 1 – M1-4 30" x 24" 1 – M6-1 R 21" x 15" 2 – M3-2P 24" x 12" 2 – M1-5 24" x 24" 1 – M6-1 L 21" x 15" 1 – M6-1 R 21" x 15" TWO "U" POST PER SIGN	

TIP NO.	SHEET NO.
I-5898	SIGN-3A
APPROVED:  Signed by: 0460620P2004021...	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

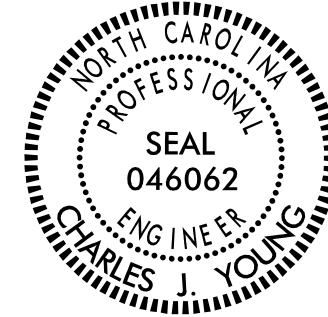TIP NO.	SHEET NO.
I-5898	SIGN-4
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

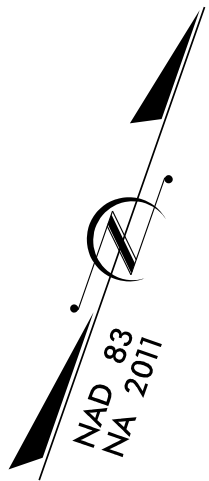

BEGIN PROJECT TIP I-5898
-Y- NC 135 STA. 106+00.00

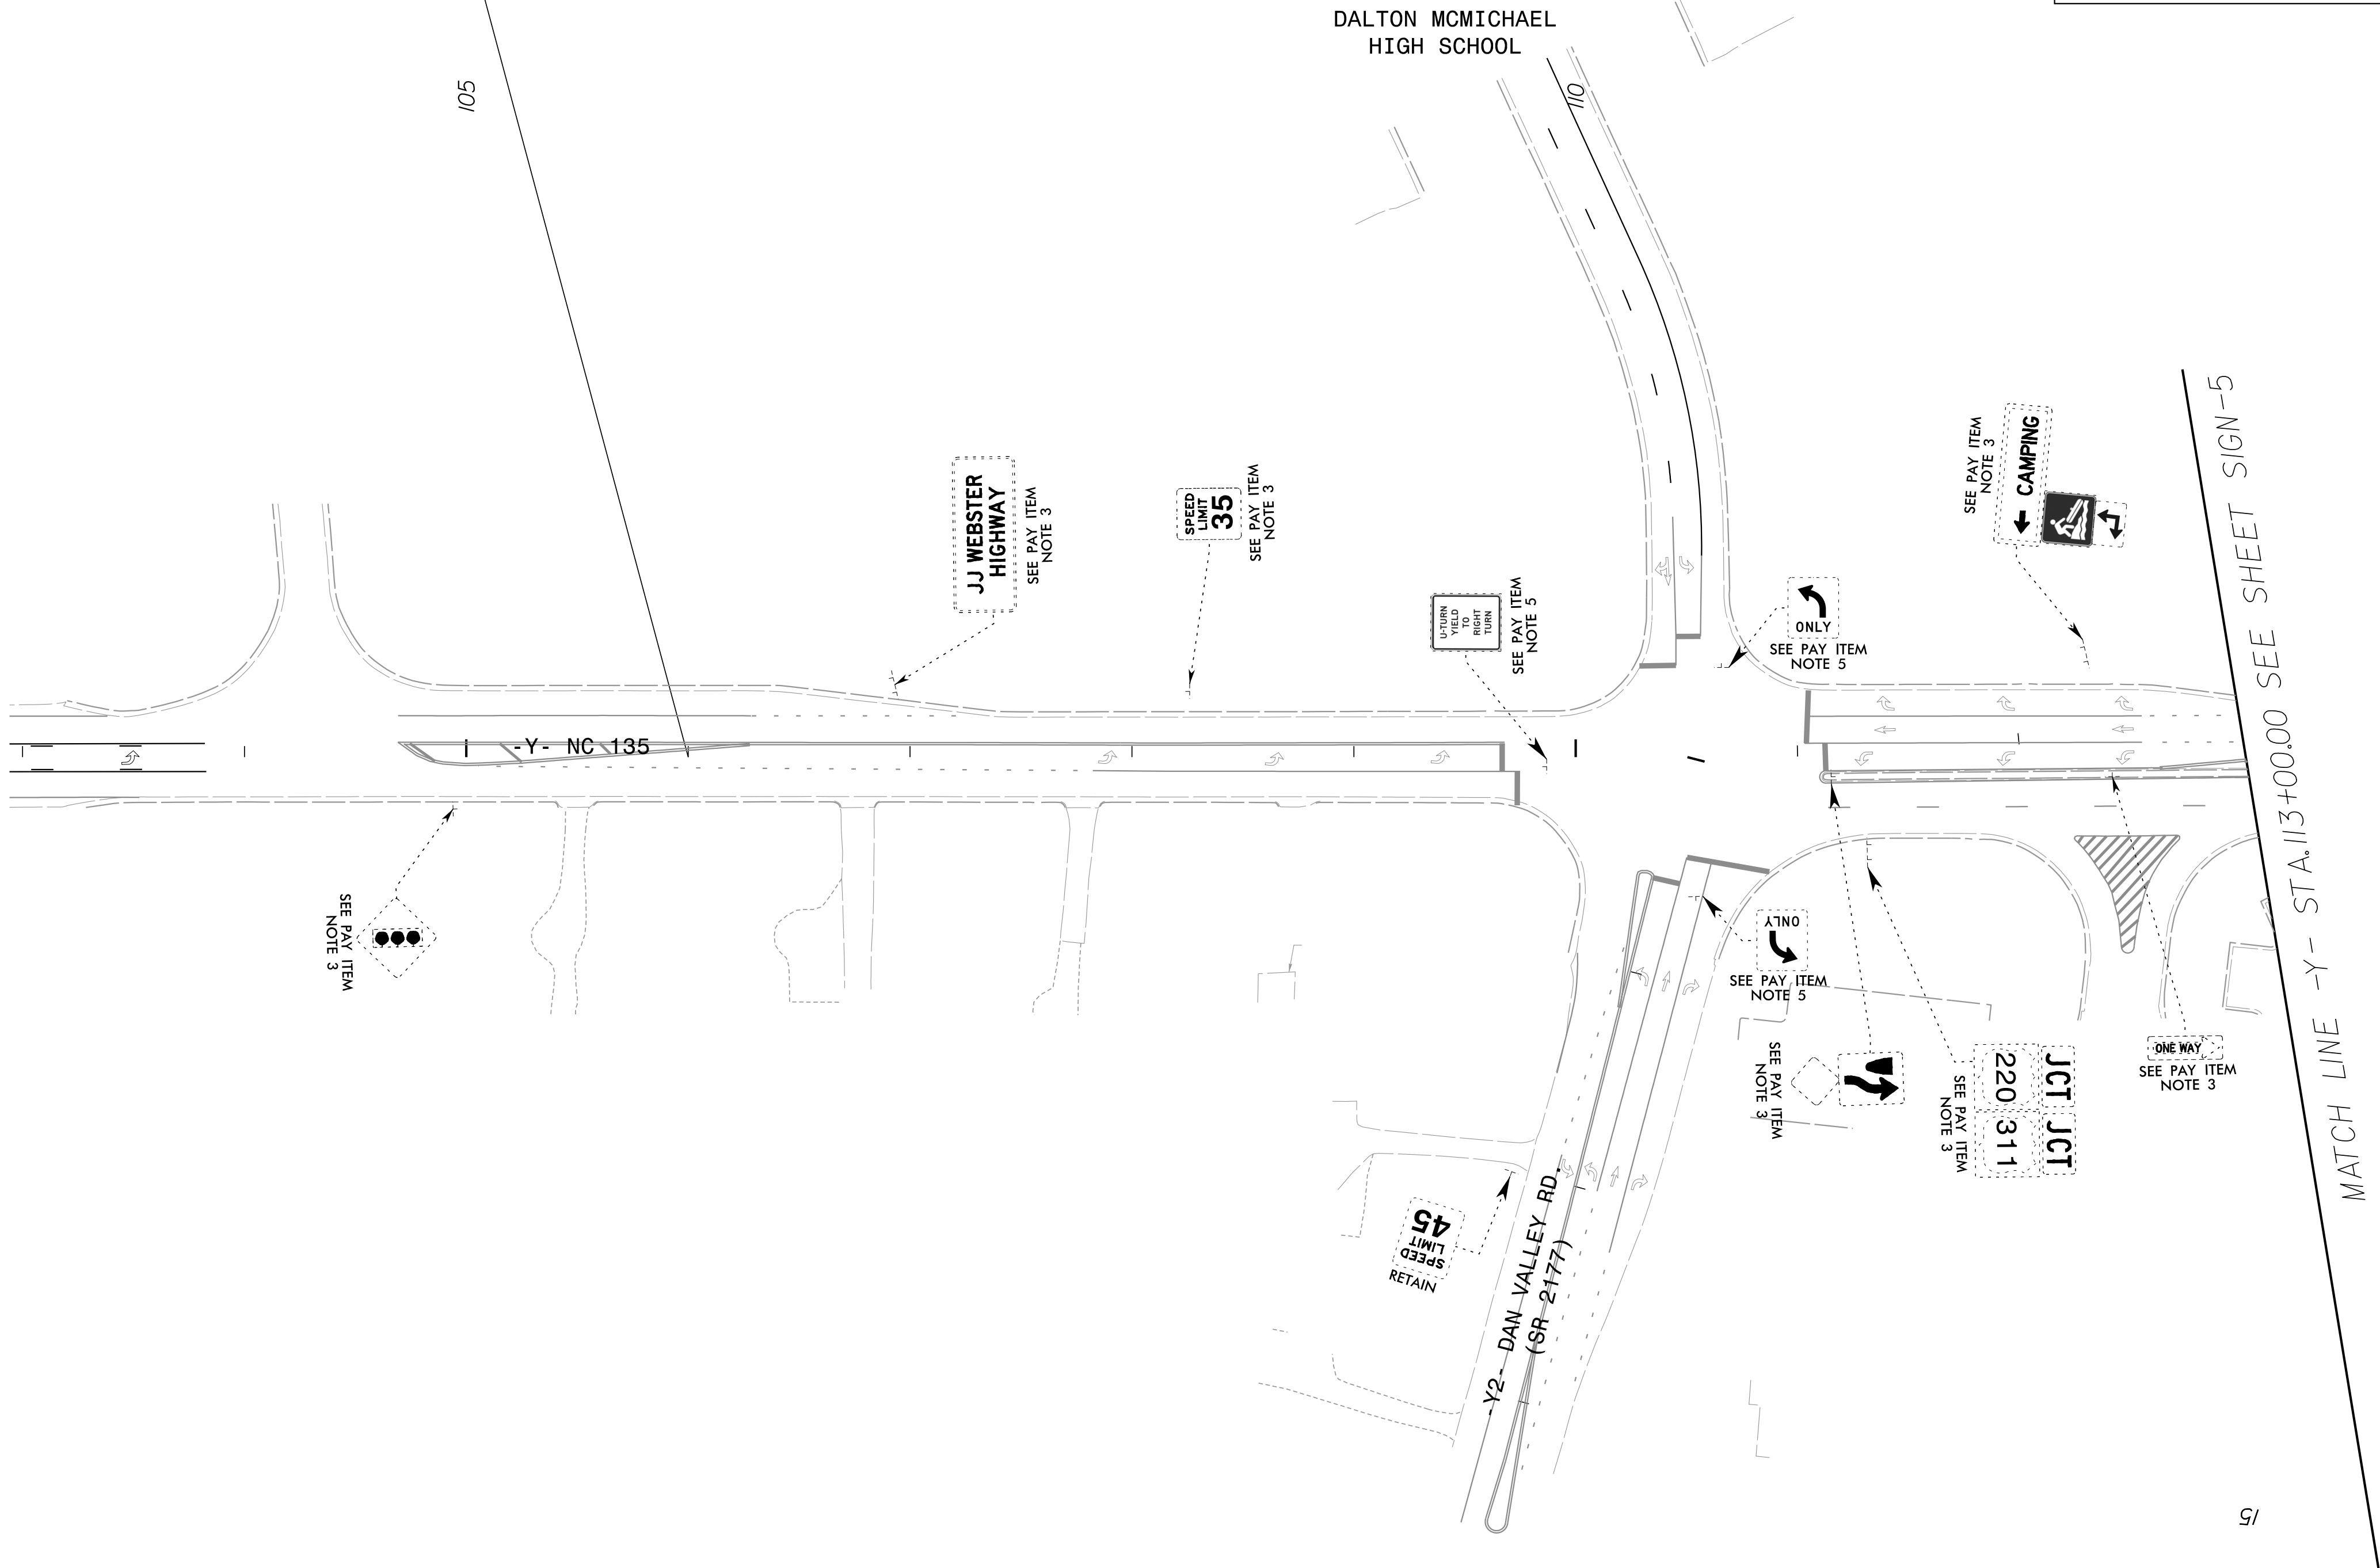



PAY ITEM NOTES


- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F




Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

EXISTING SIGNS

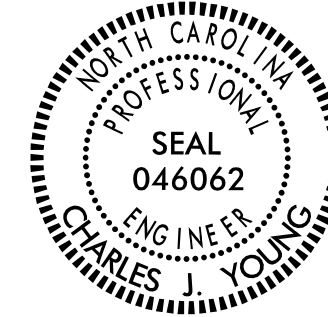
TIP NO.	SHEET NO.
I-5898	SIGN-5
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

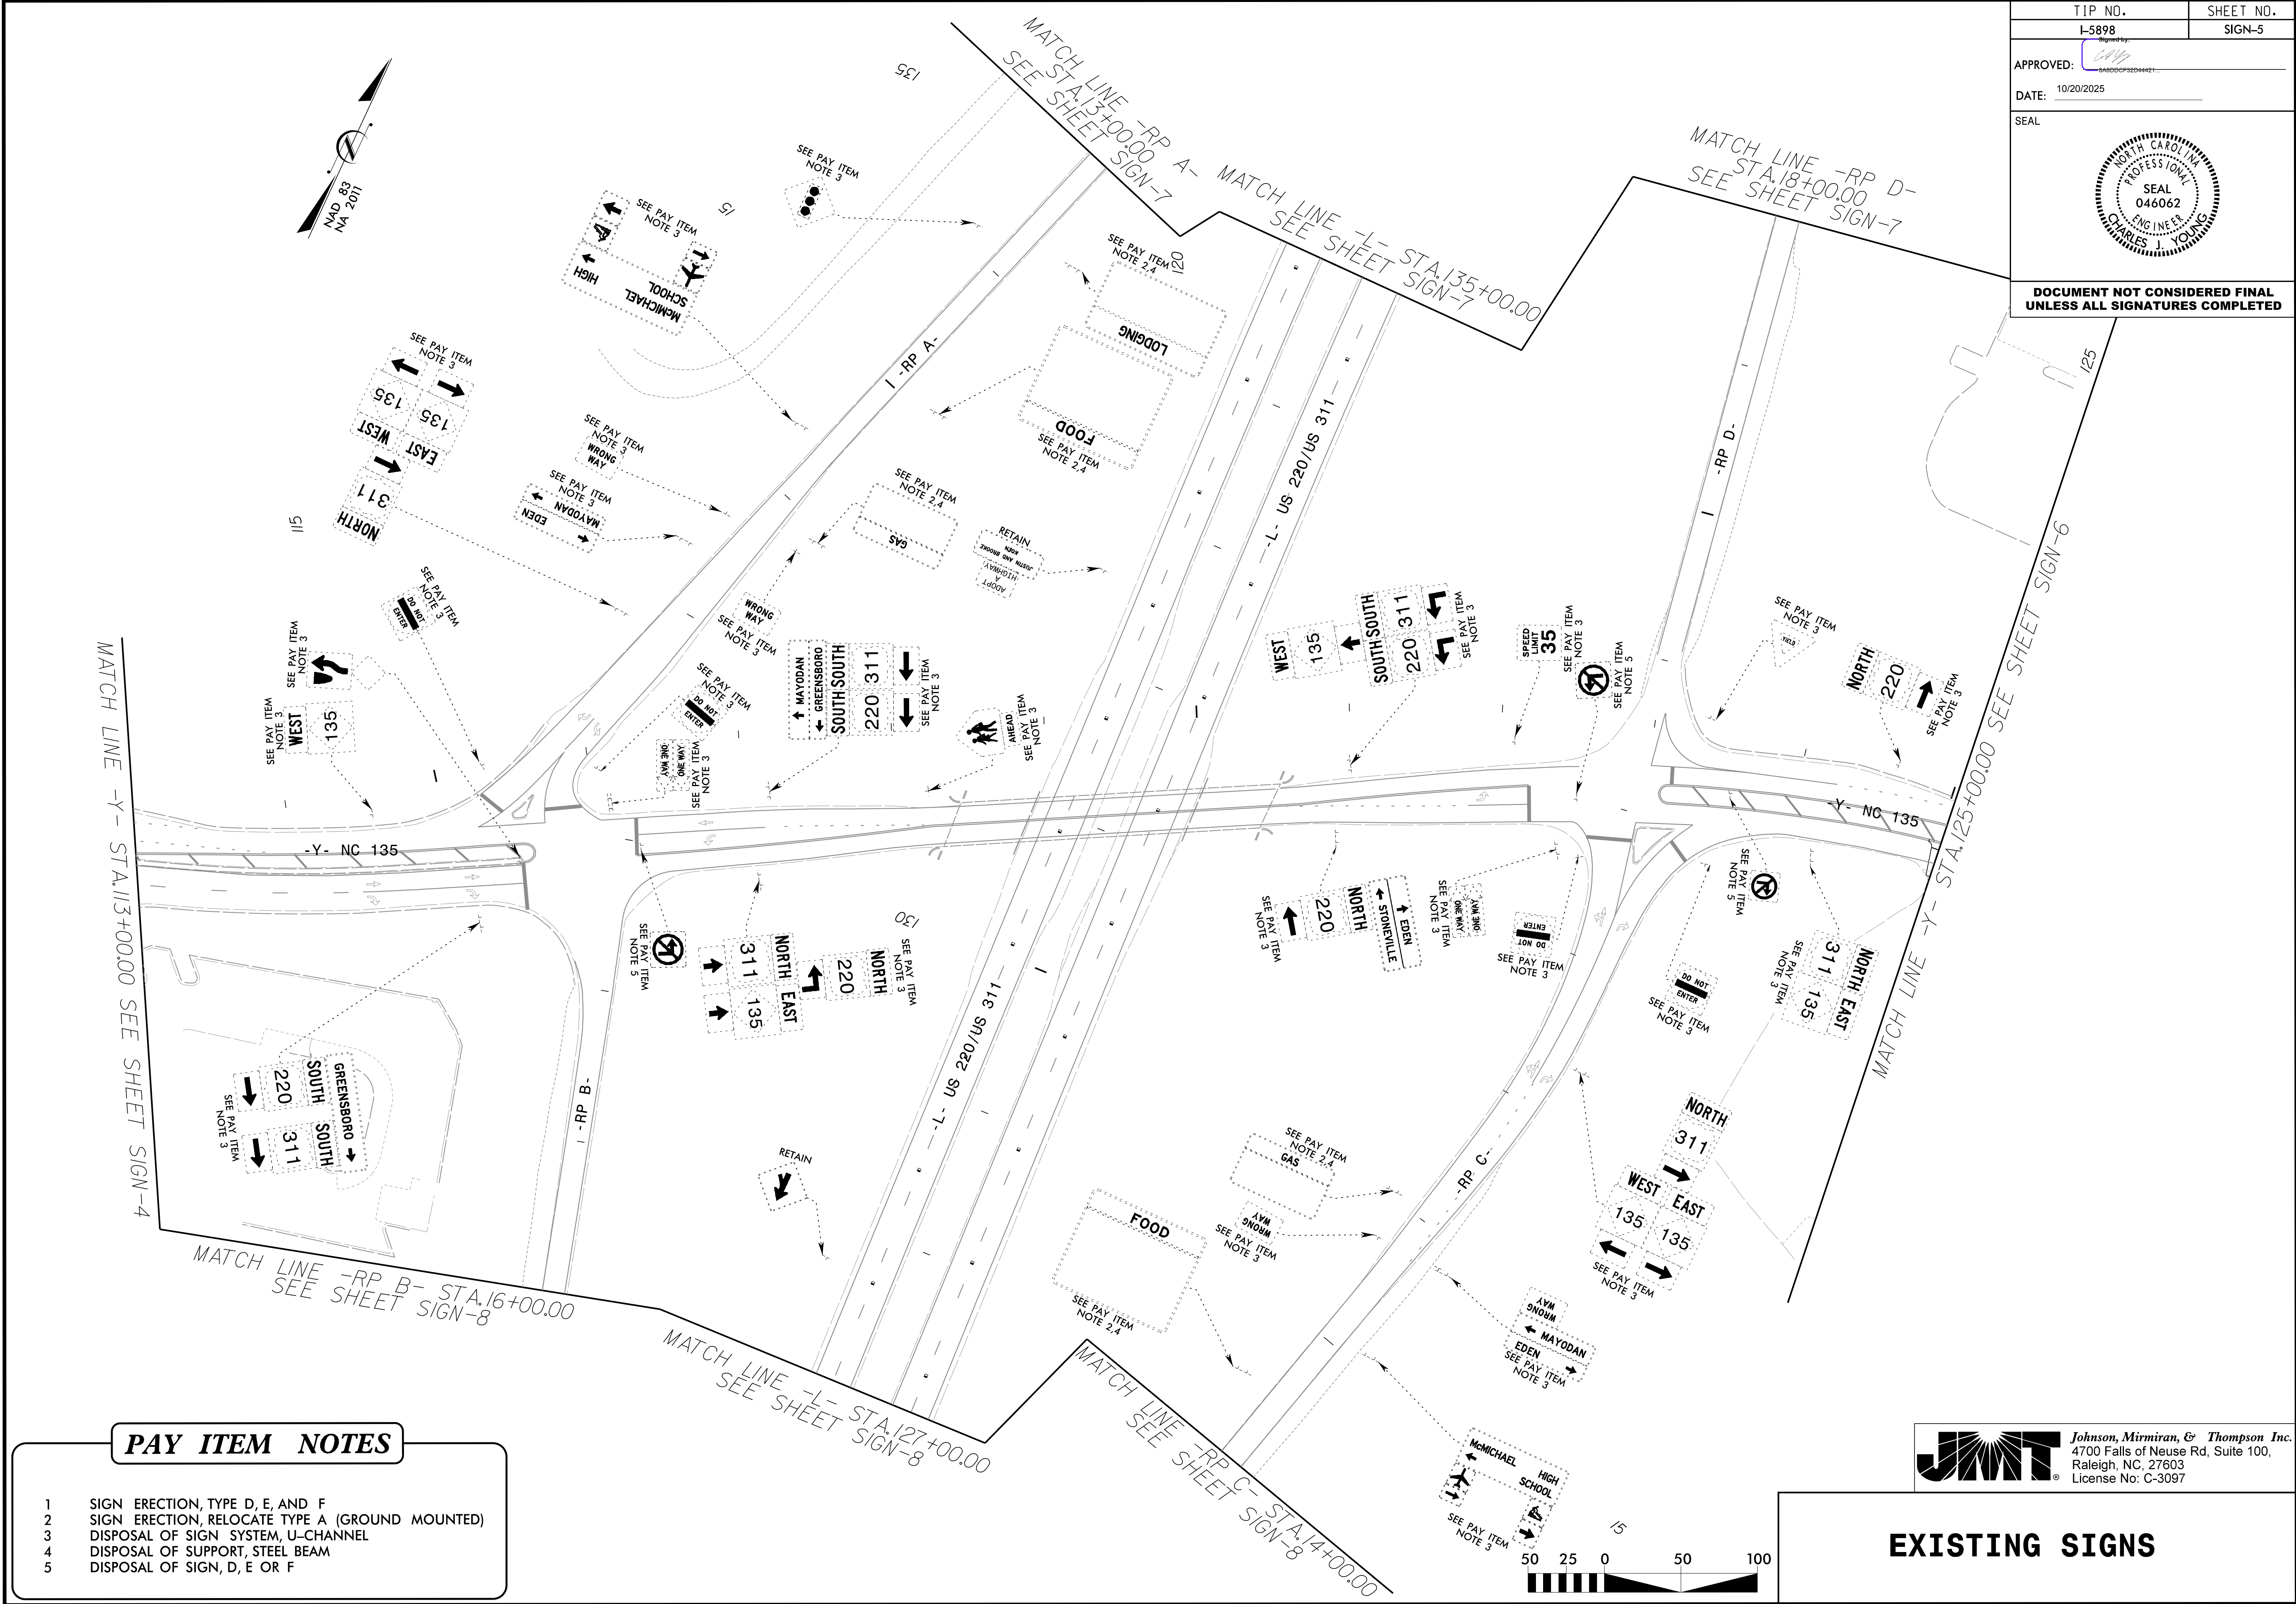

TIP NO.	SHEET NO.
I-5898	SIGN-6
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




MATCH LINE STA. 125+00.00 SEE SHEET SIGN-5

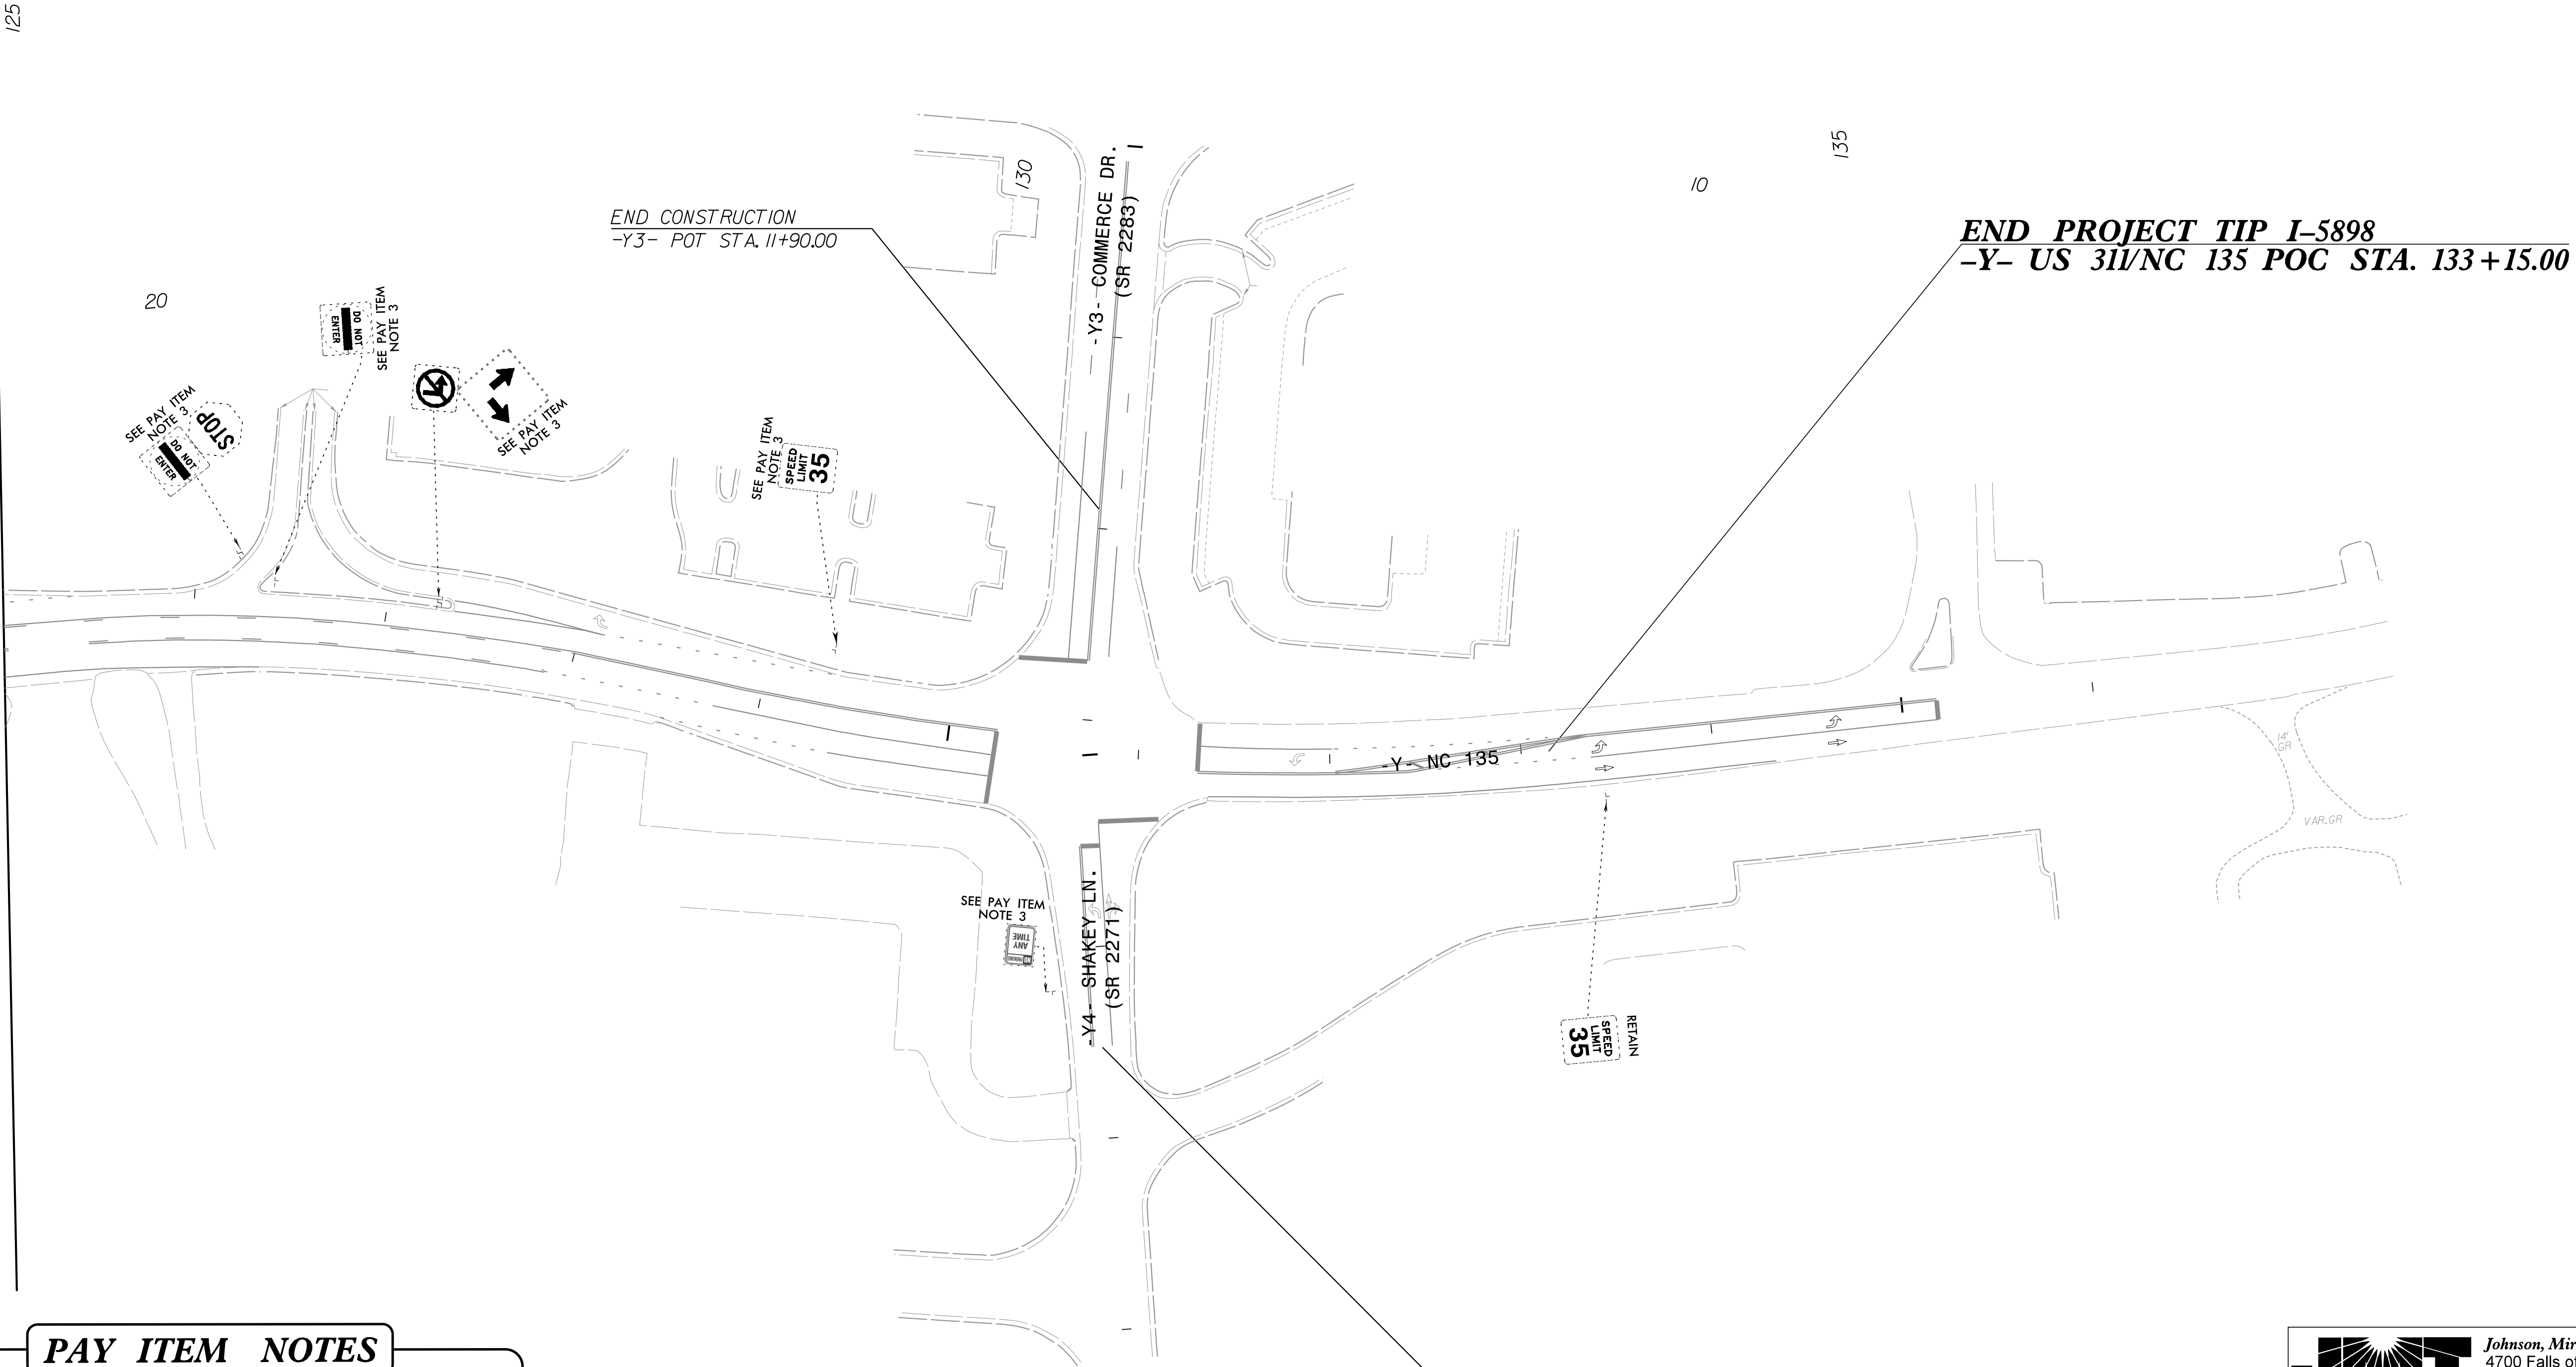

PAY ITEM NOTES


- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F

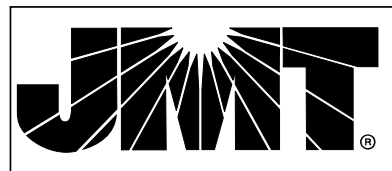


Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

EXISTING SIGNS



TIP NO.	SHEET NO.
I-5898	SIGN-7
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	


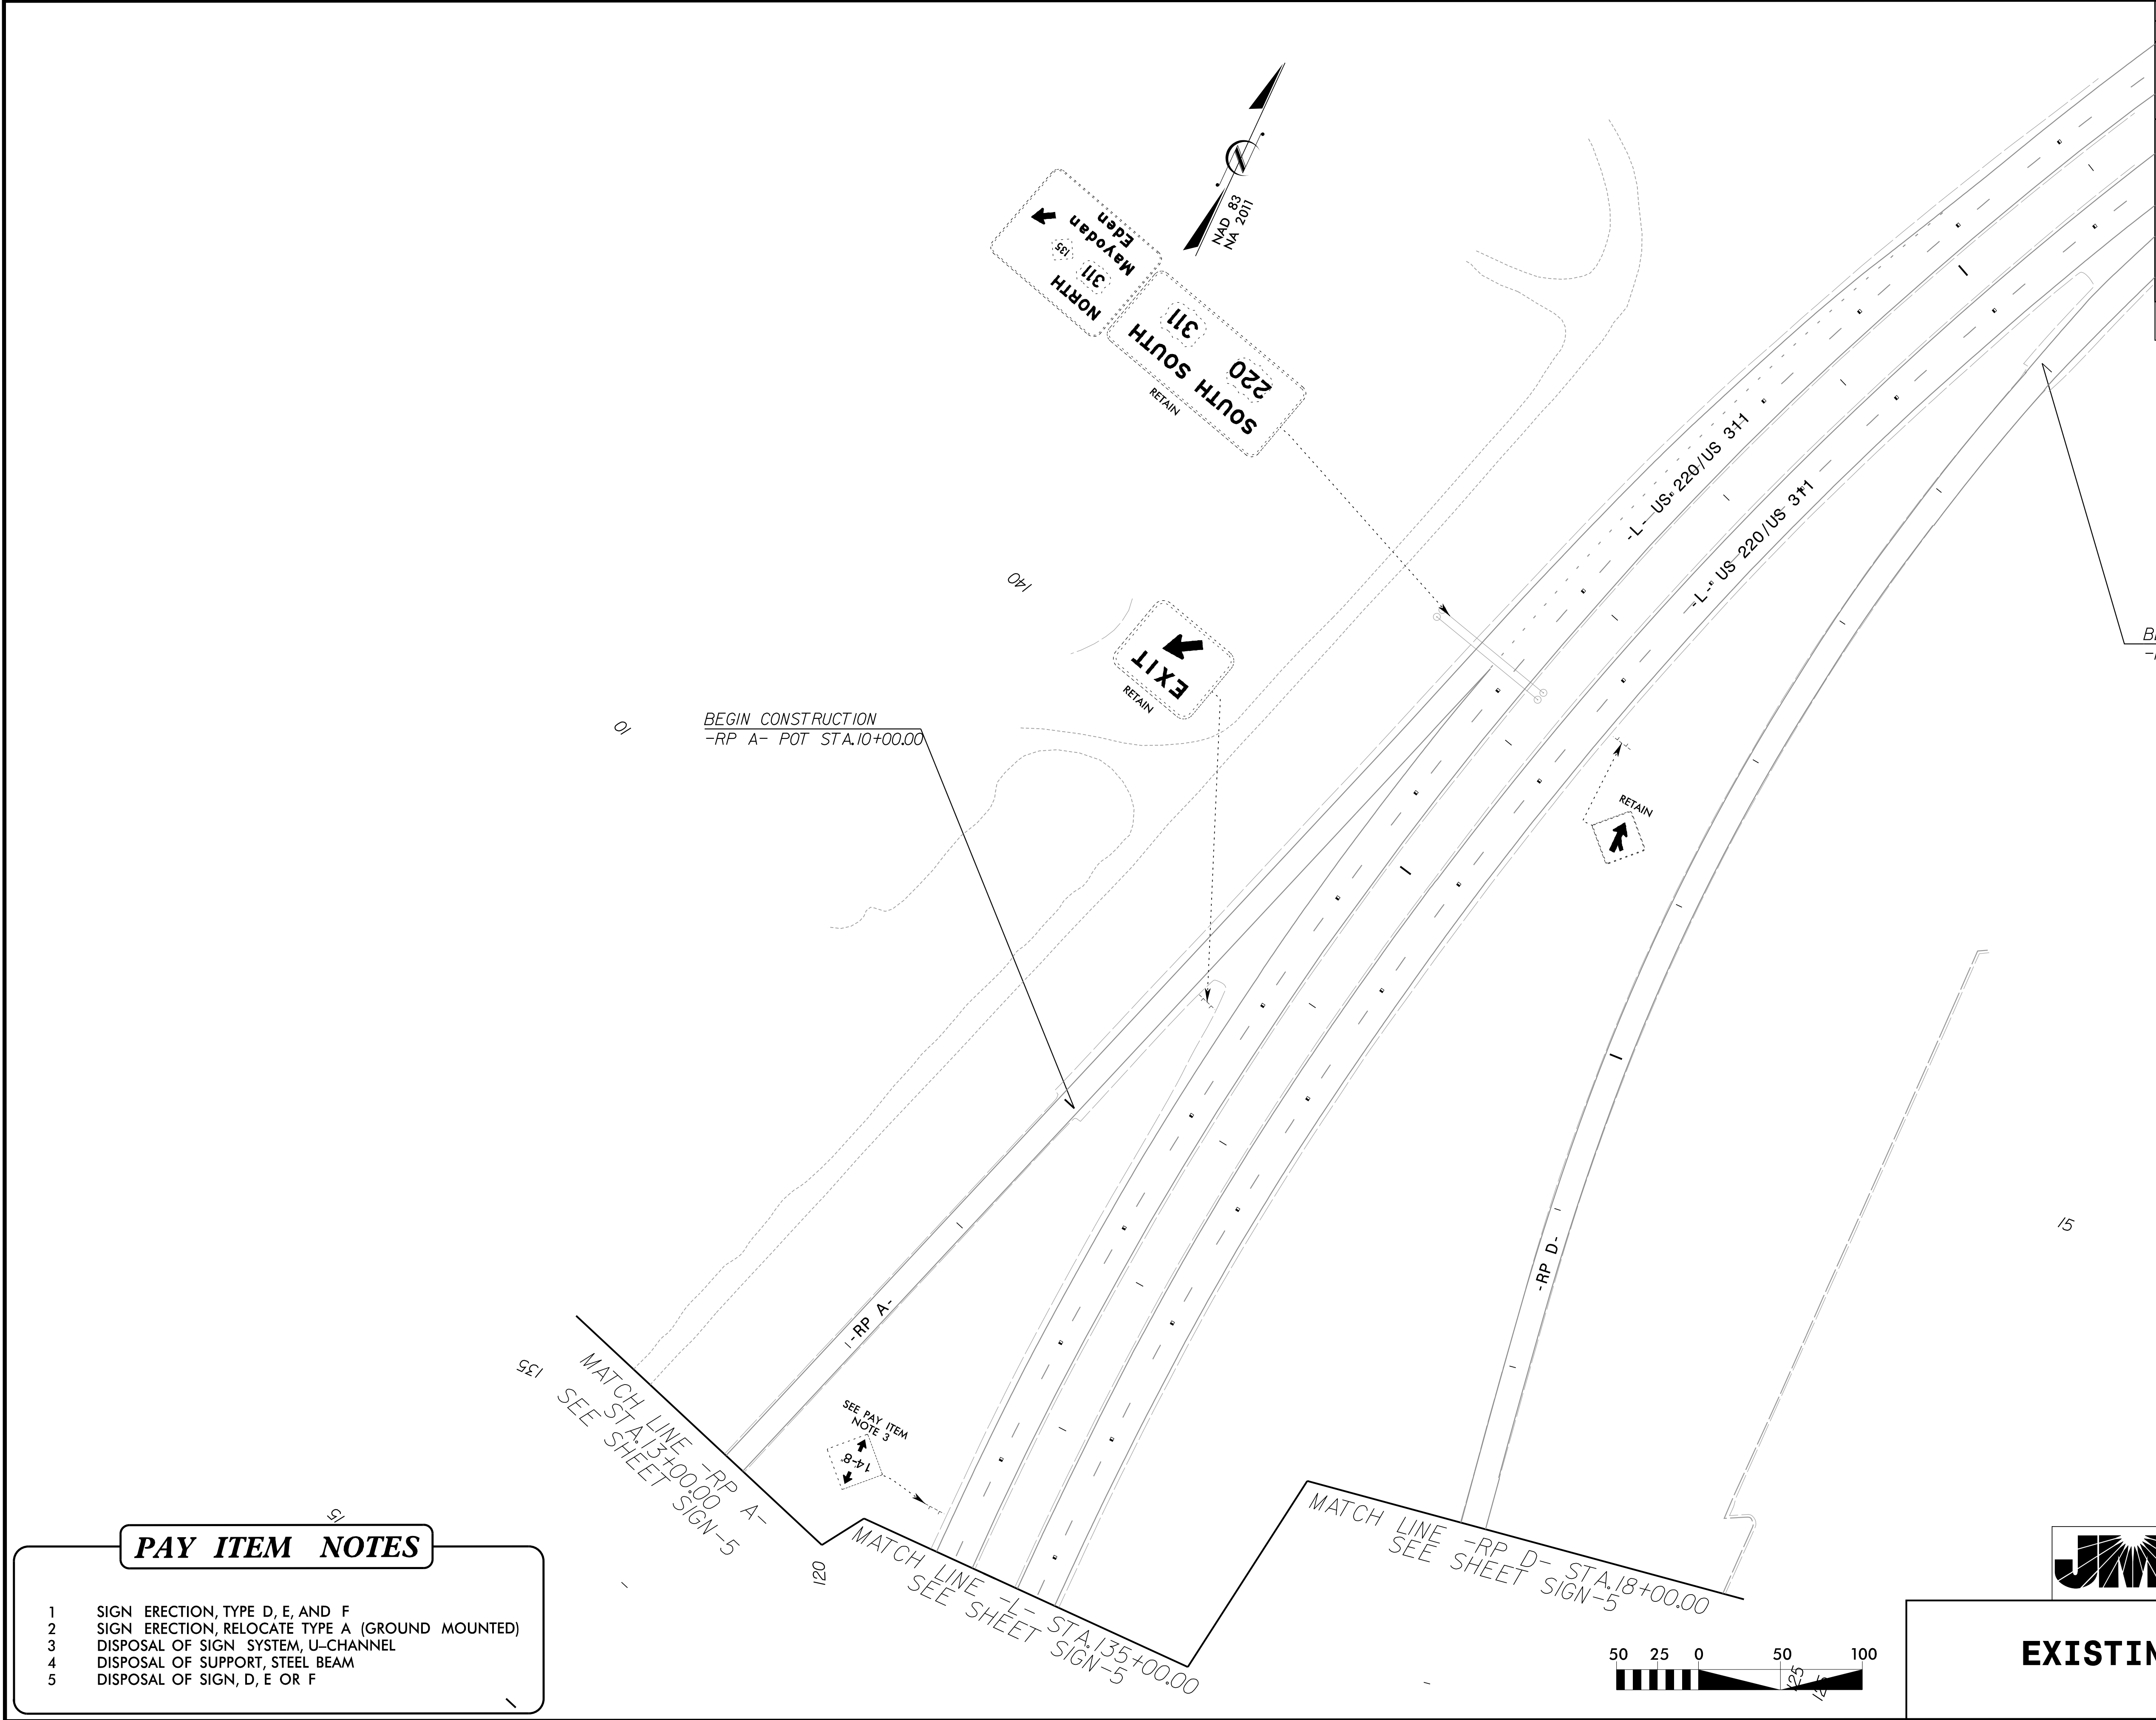



PAY ITEM NOTES

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F

 **Johnson, Mirmiran, & Thompson Inc.**
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

EXISTING SIGNS

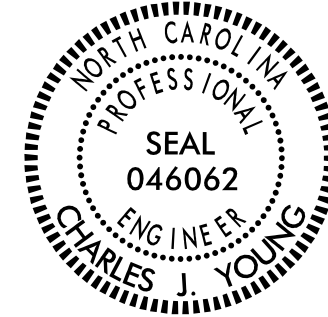TIP NO.	SHEET NO.
I-5898	SIGN-8
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

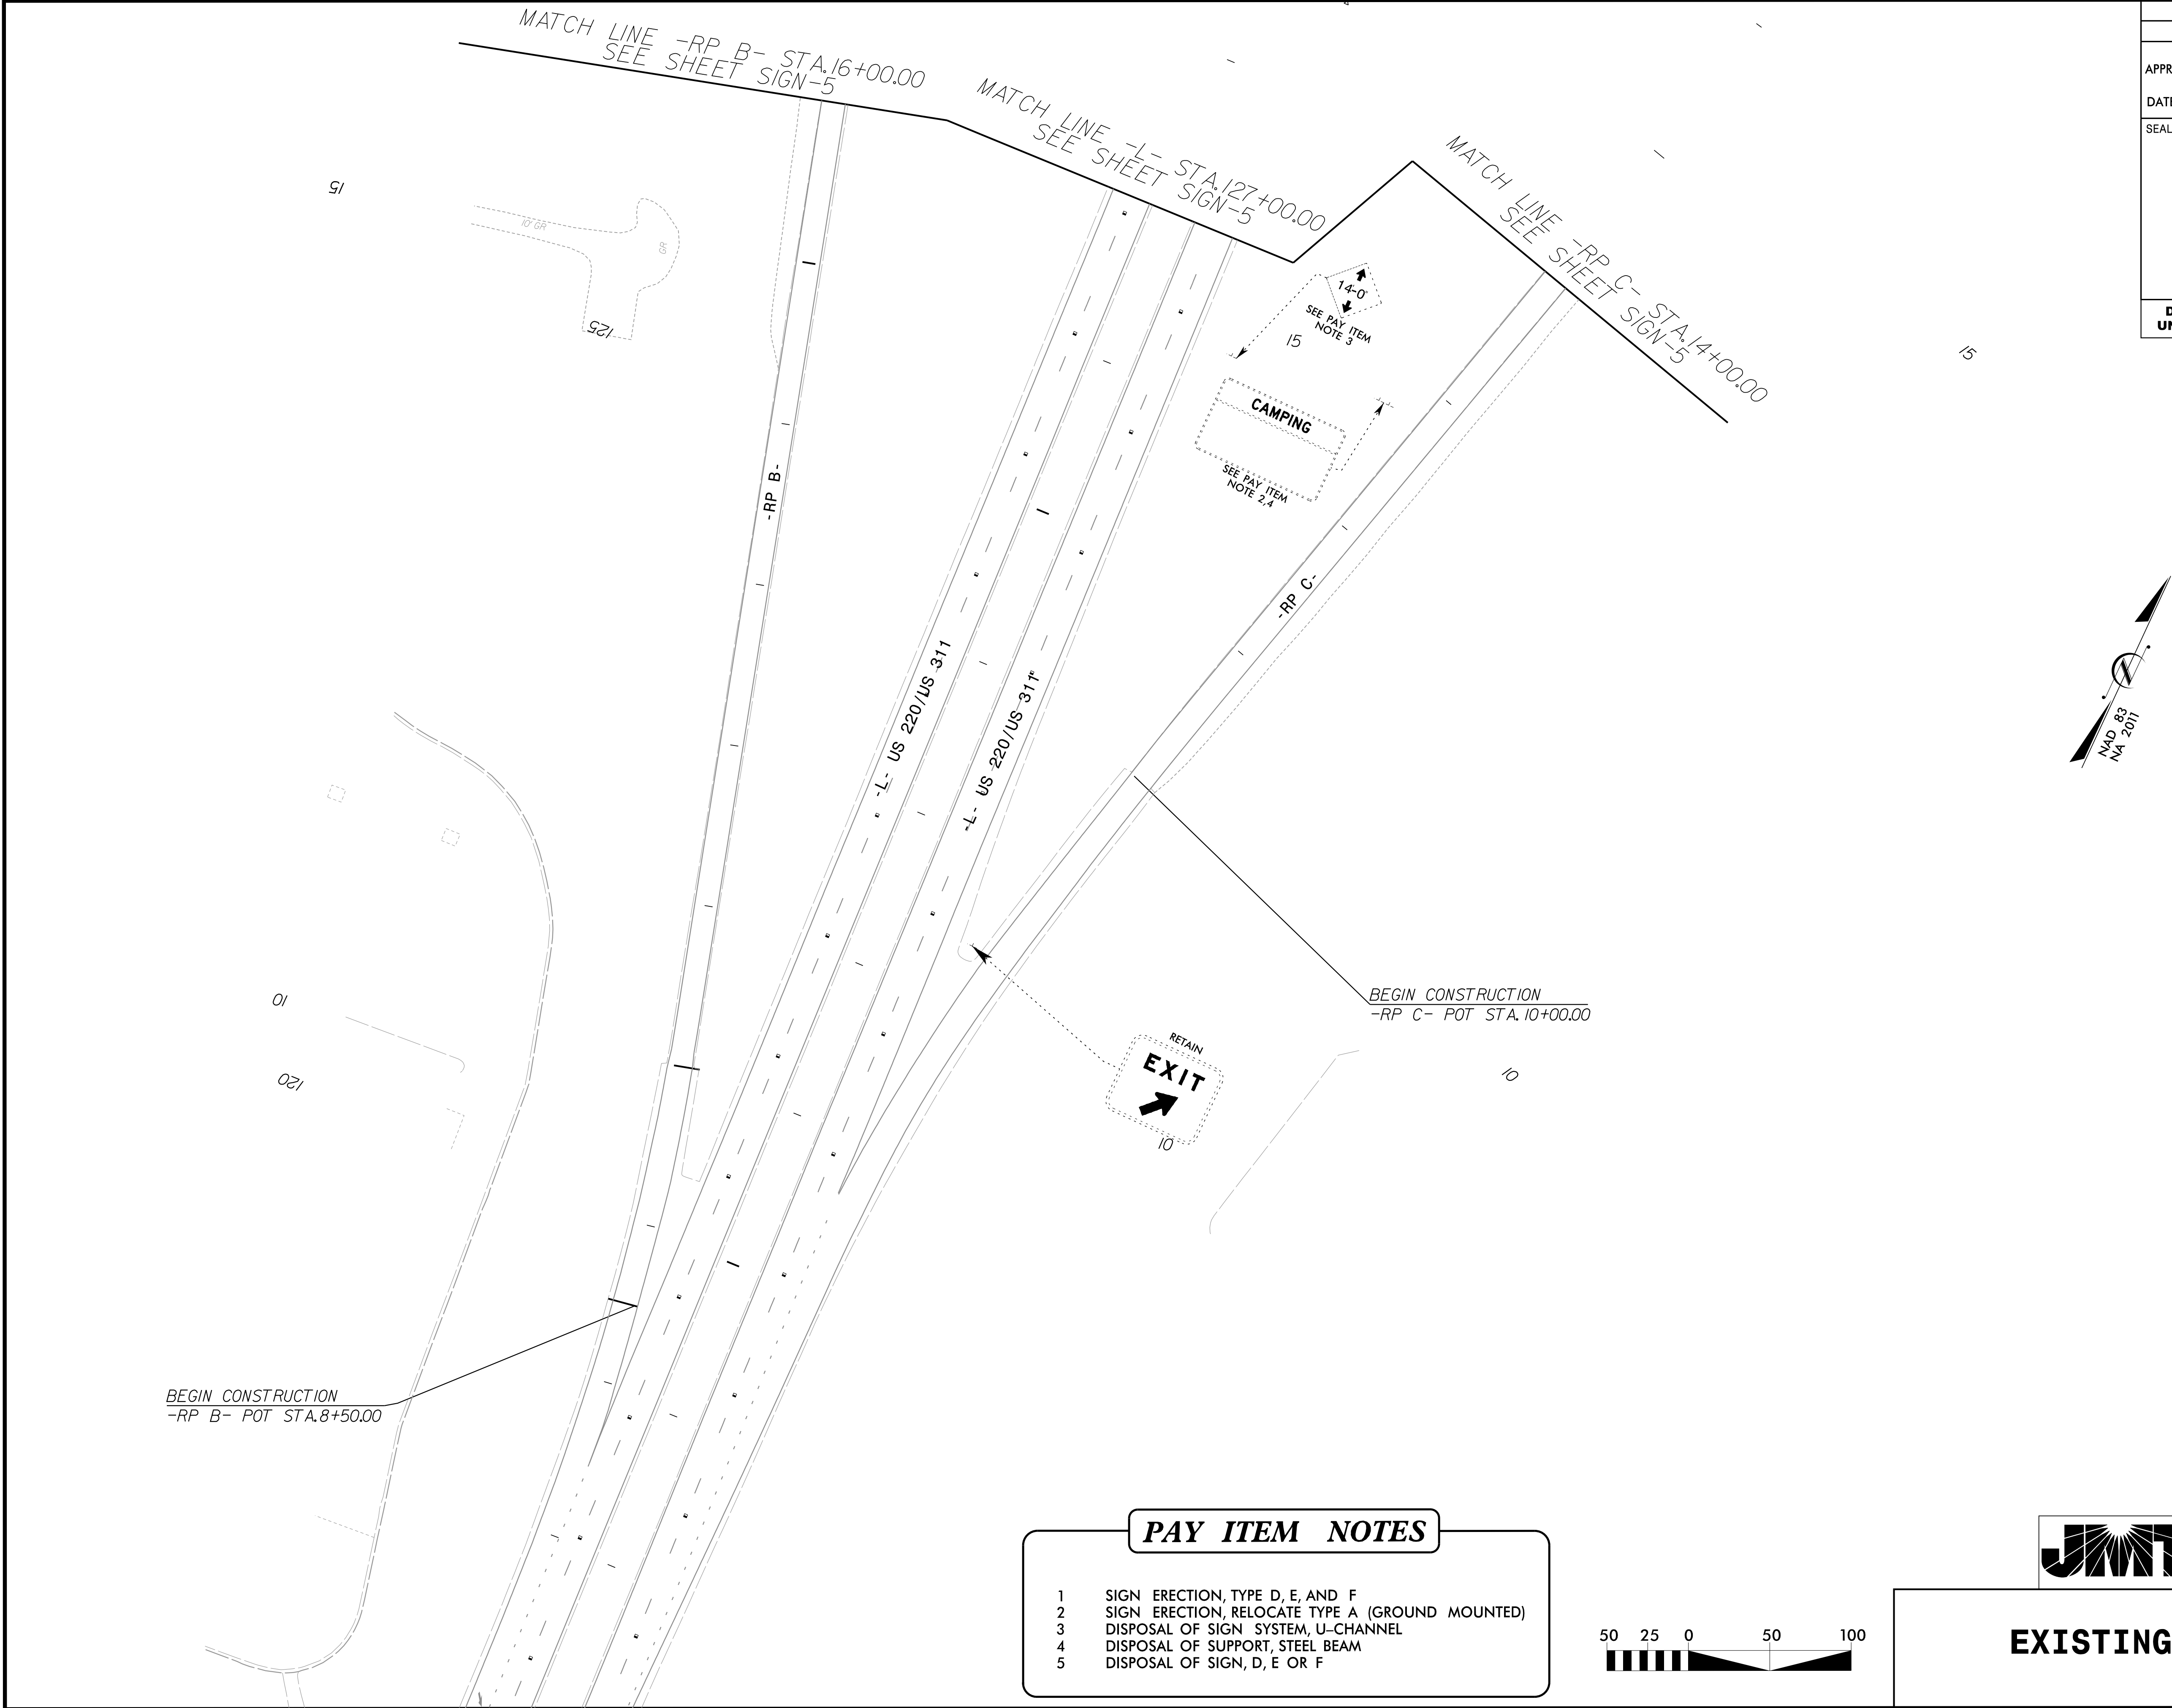

9/3/2025 3:03:29 PM
I:\5898-sgn-psn_08.dgn
User: jredde

PAY ITEM NOTES	
1	SIGN ERECTION, TYPE D, E, AND F
2	SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
3	DISPOSAL OF SIGN SYSTEM, U-CHANNEL
4	DISPOSAL OF SUPPORT, STEEL BEAM
5	DISPOSAL OF SIGN, D, E OR F






	Johnson, Mirmiran, & Thompson Inc. 4700 Falls of Neuse Rd, Suite 100, Raleigh, NC, 27603 License No: C-3097
---	--


EXISTING SIGNS



PROPOSED SIGNALIZED INTERSECTION

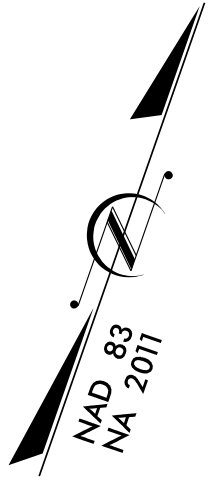

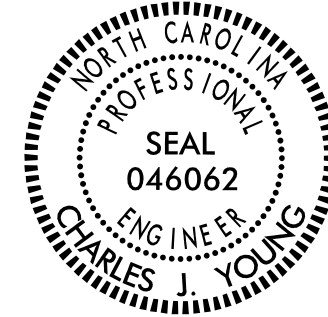TIP NO.	SHEET NO.
I-5898	SIGN-9
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

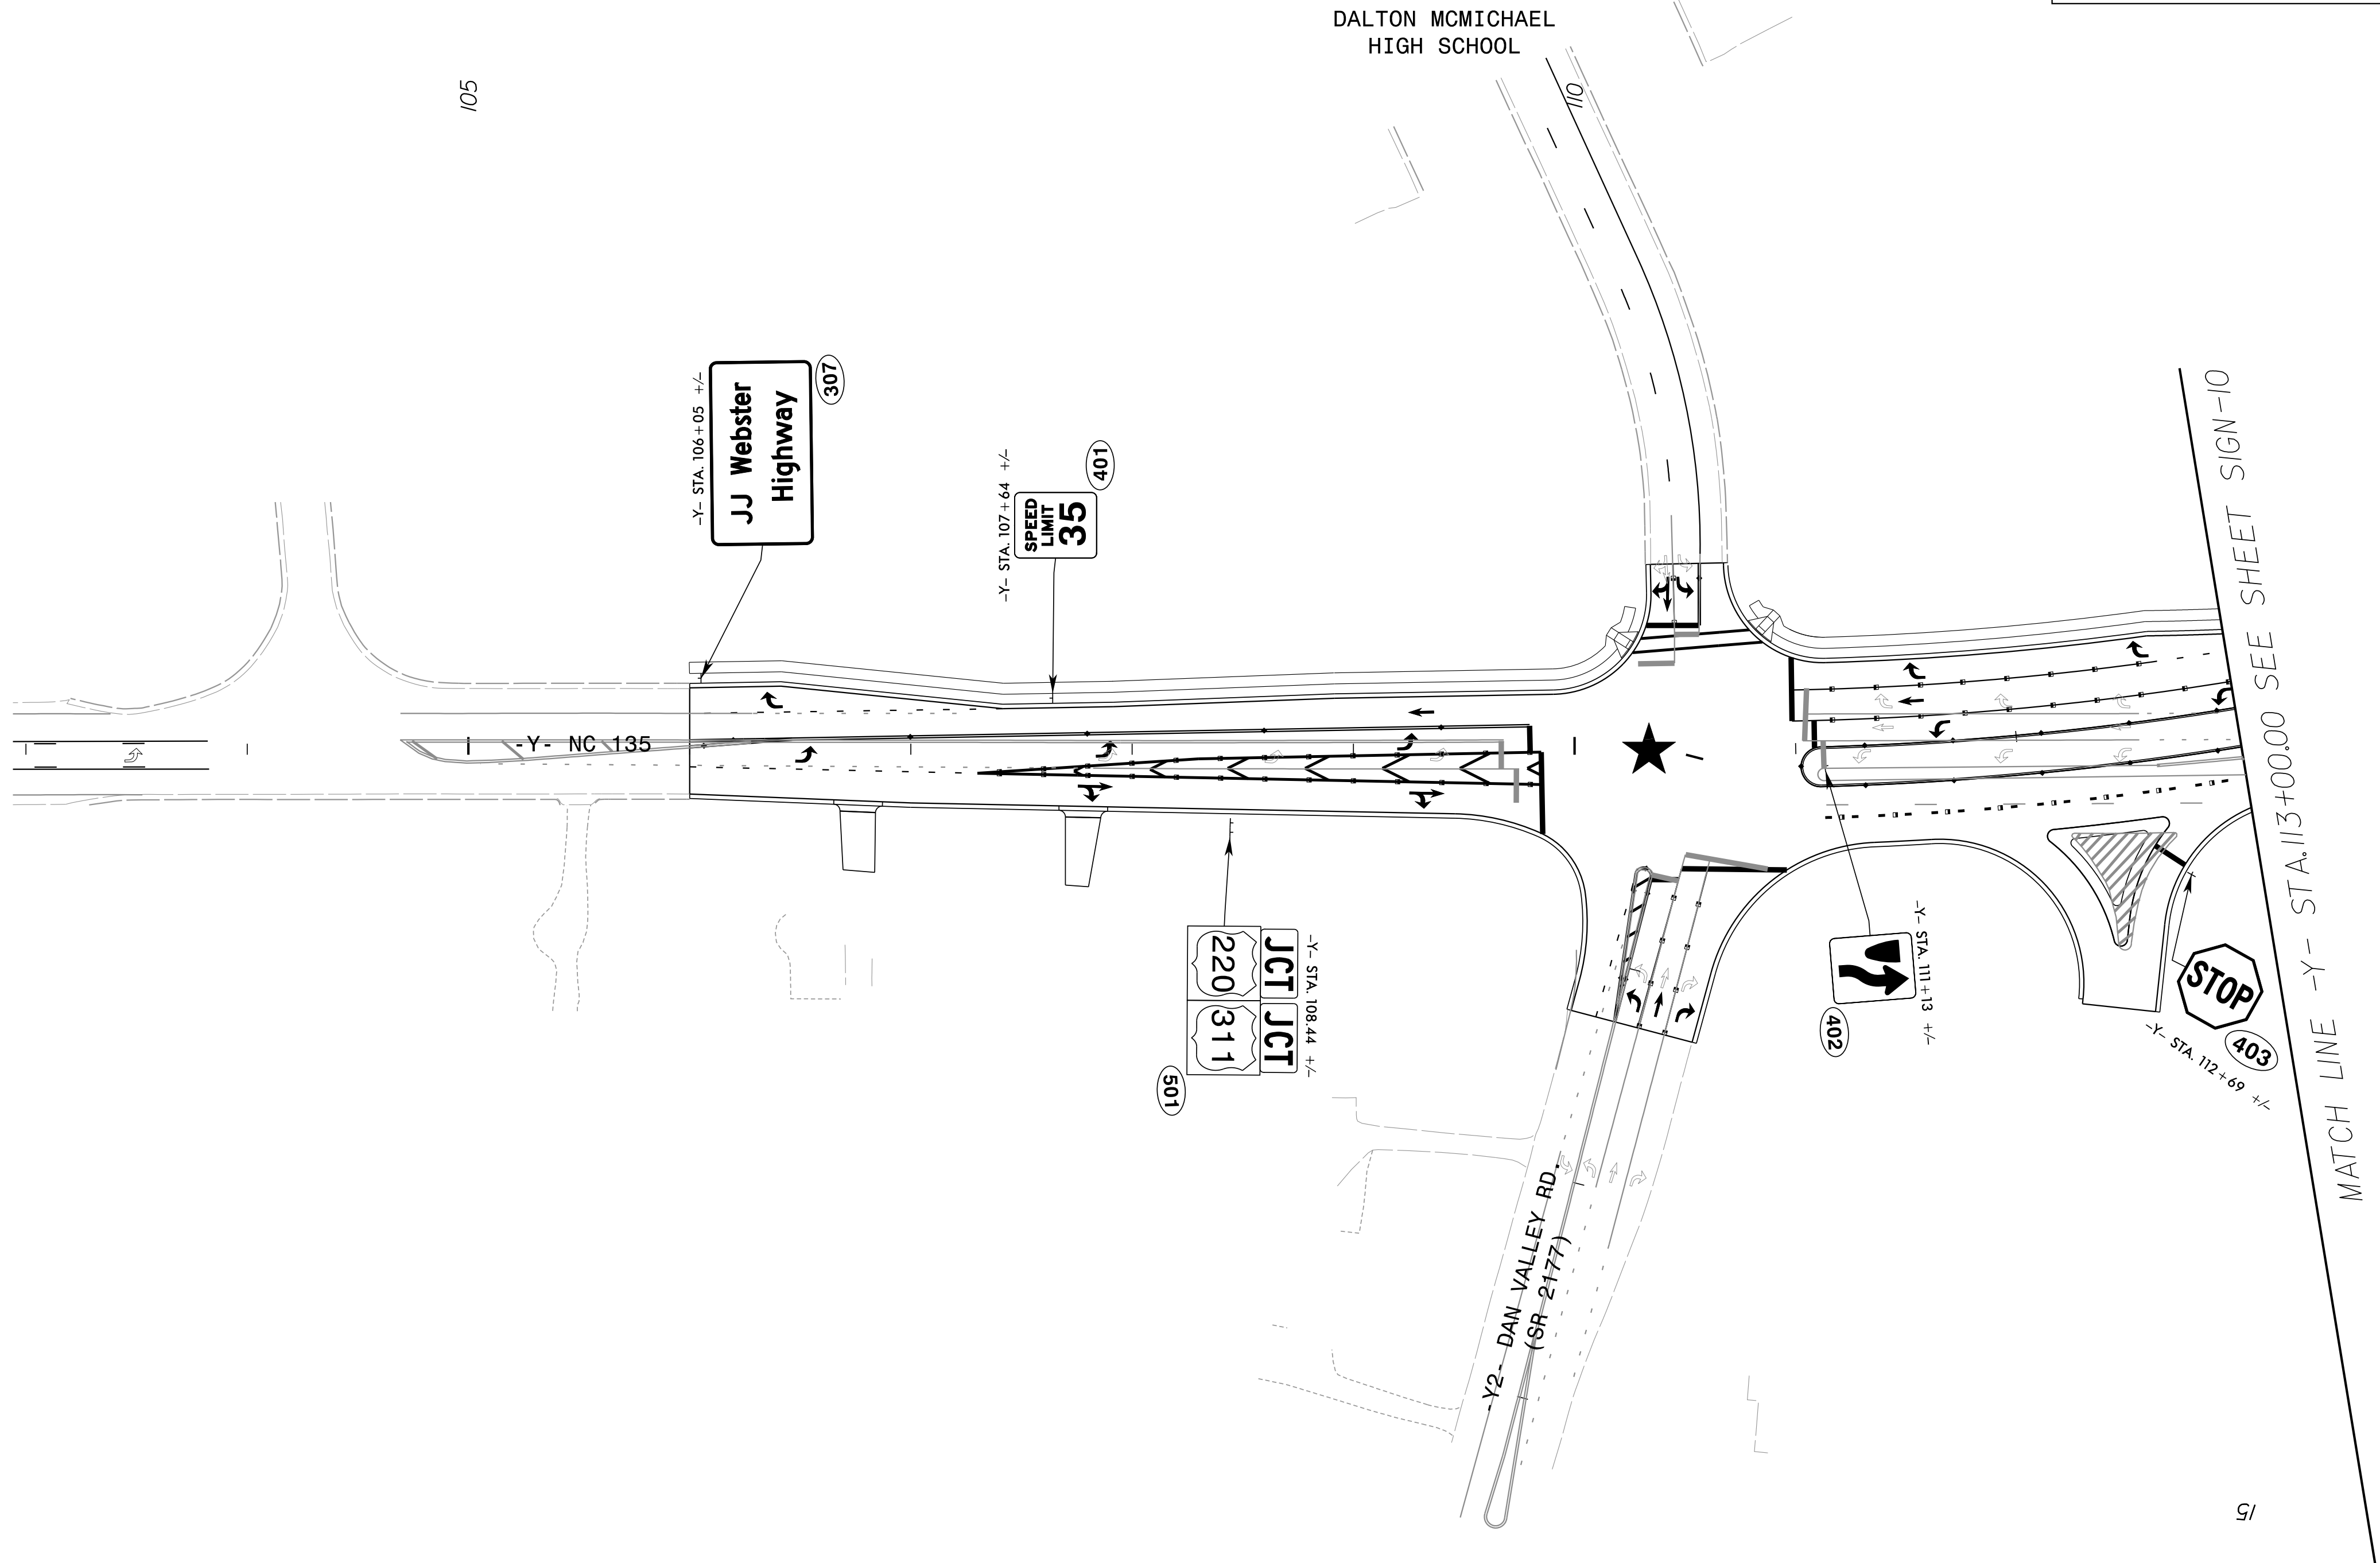

PAY ITEM NOTES

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F

REFER TO PAY ITEM NOTE 1 FOR ALL SIGNAGE ON PLAN SHEET, UNLESS OTHERWISE SPECIFIED.

PAY ITEM NOTE 2 SPECIFIES THE PROPOSED SIGN LOCATION.




Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

PROPOSED SIGNS

TIP NO.
I-5898


SHEET NO.
SIGN-10

APPROVED: 

DATE: 10/20/2025

SEAL




DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

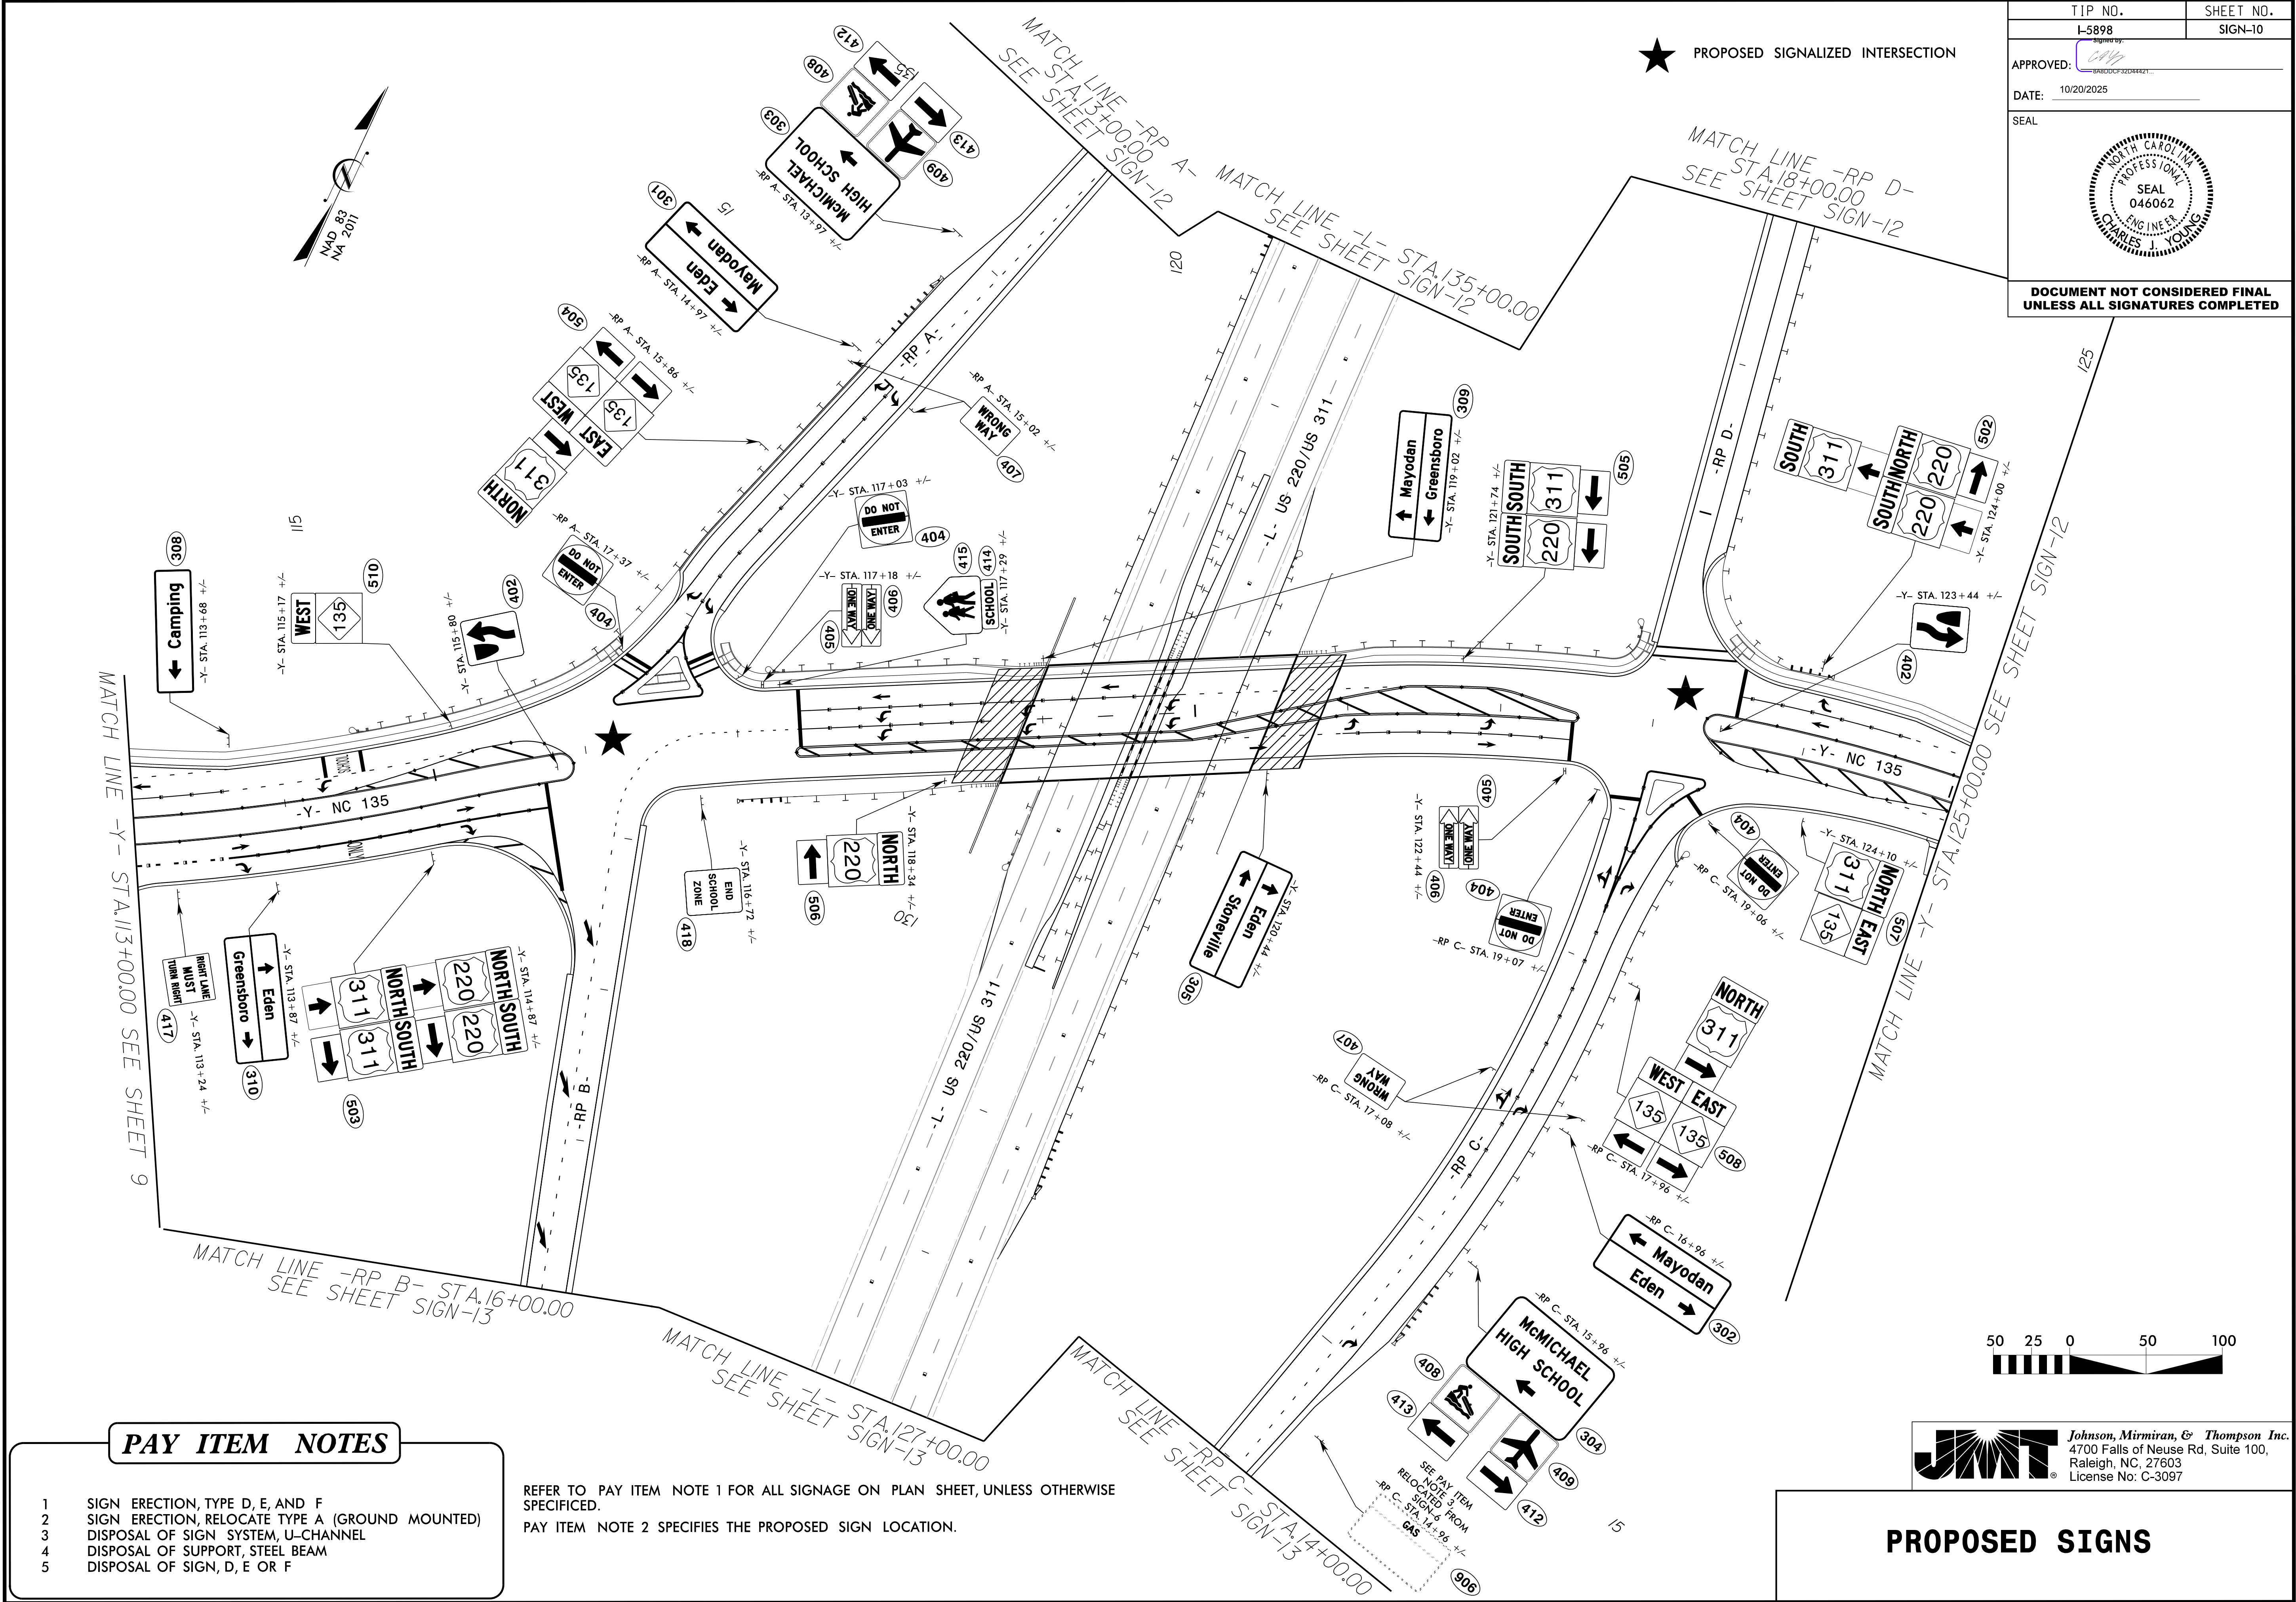




PROPOSED SIGNALIZED INTERSECTION

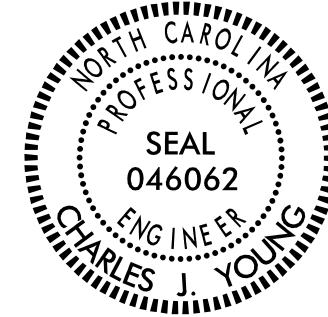

TIP NO.	SHEET NO.
I-5898	SIGN-11
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

MATCH LINE STA. 125+00.00 SEE SHEET SIGN-10

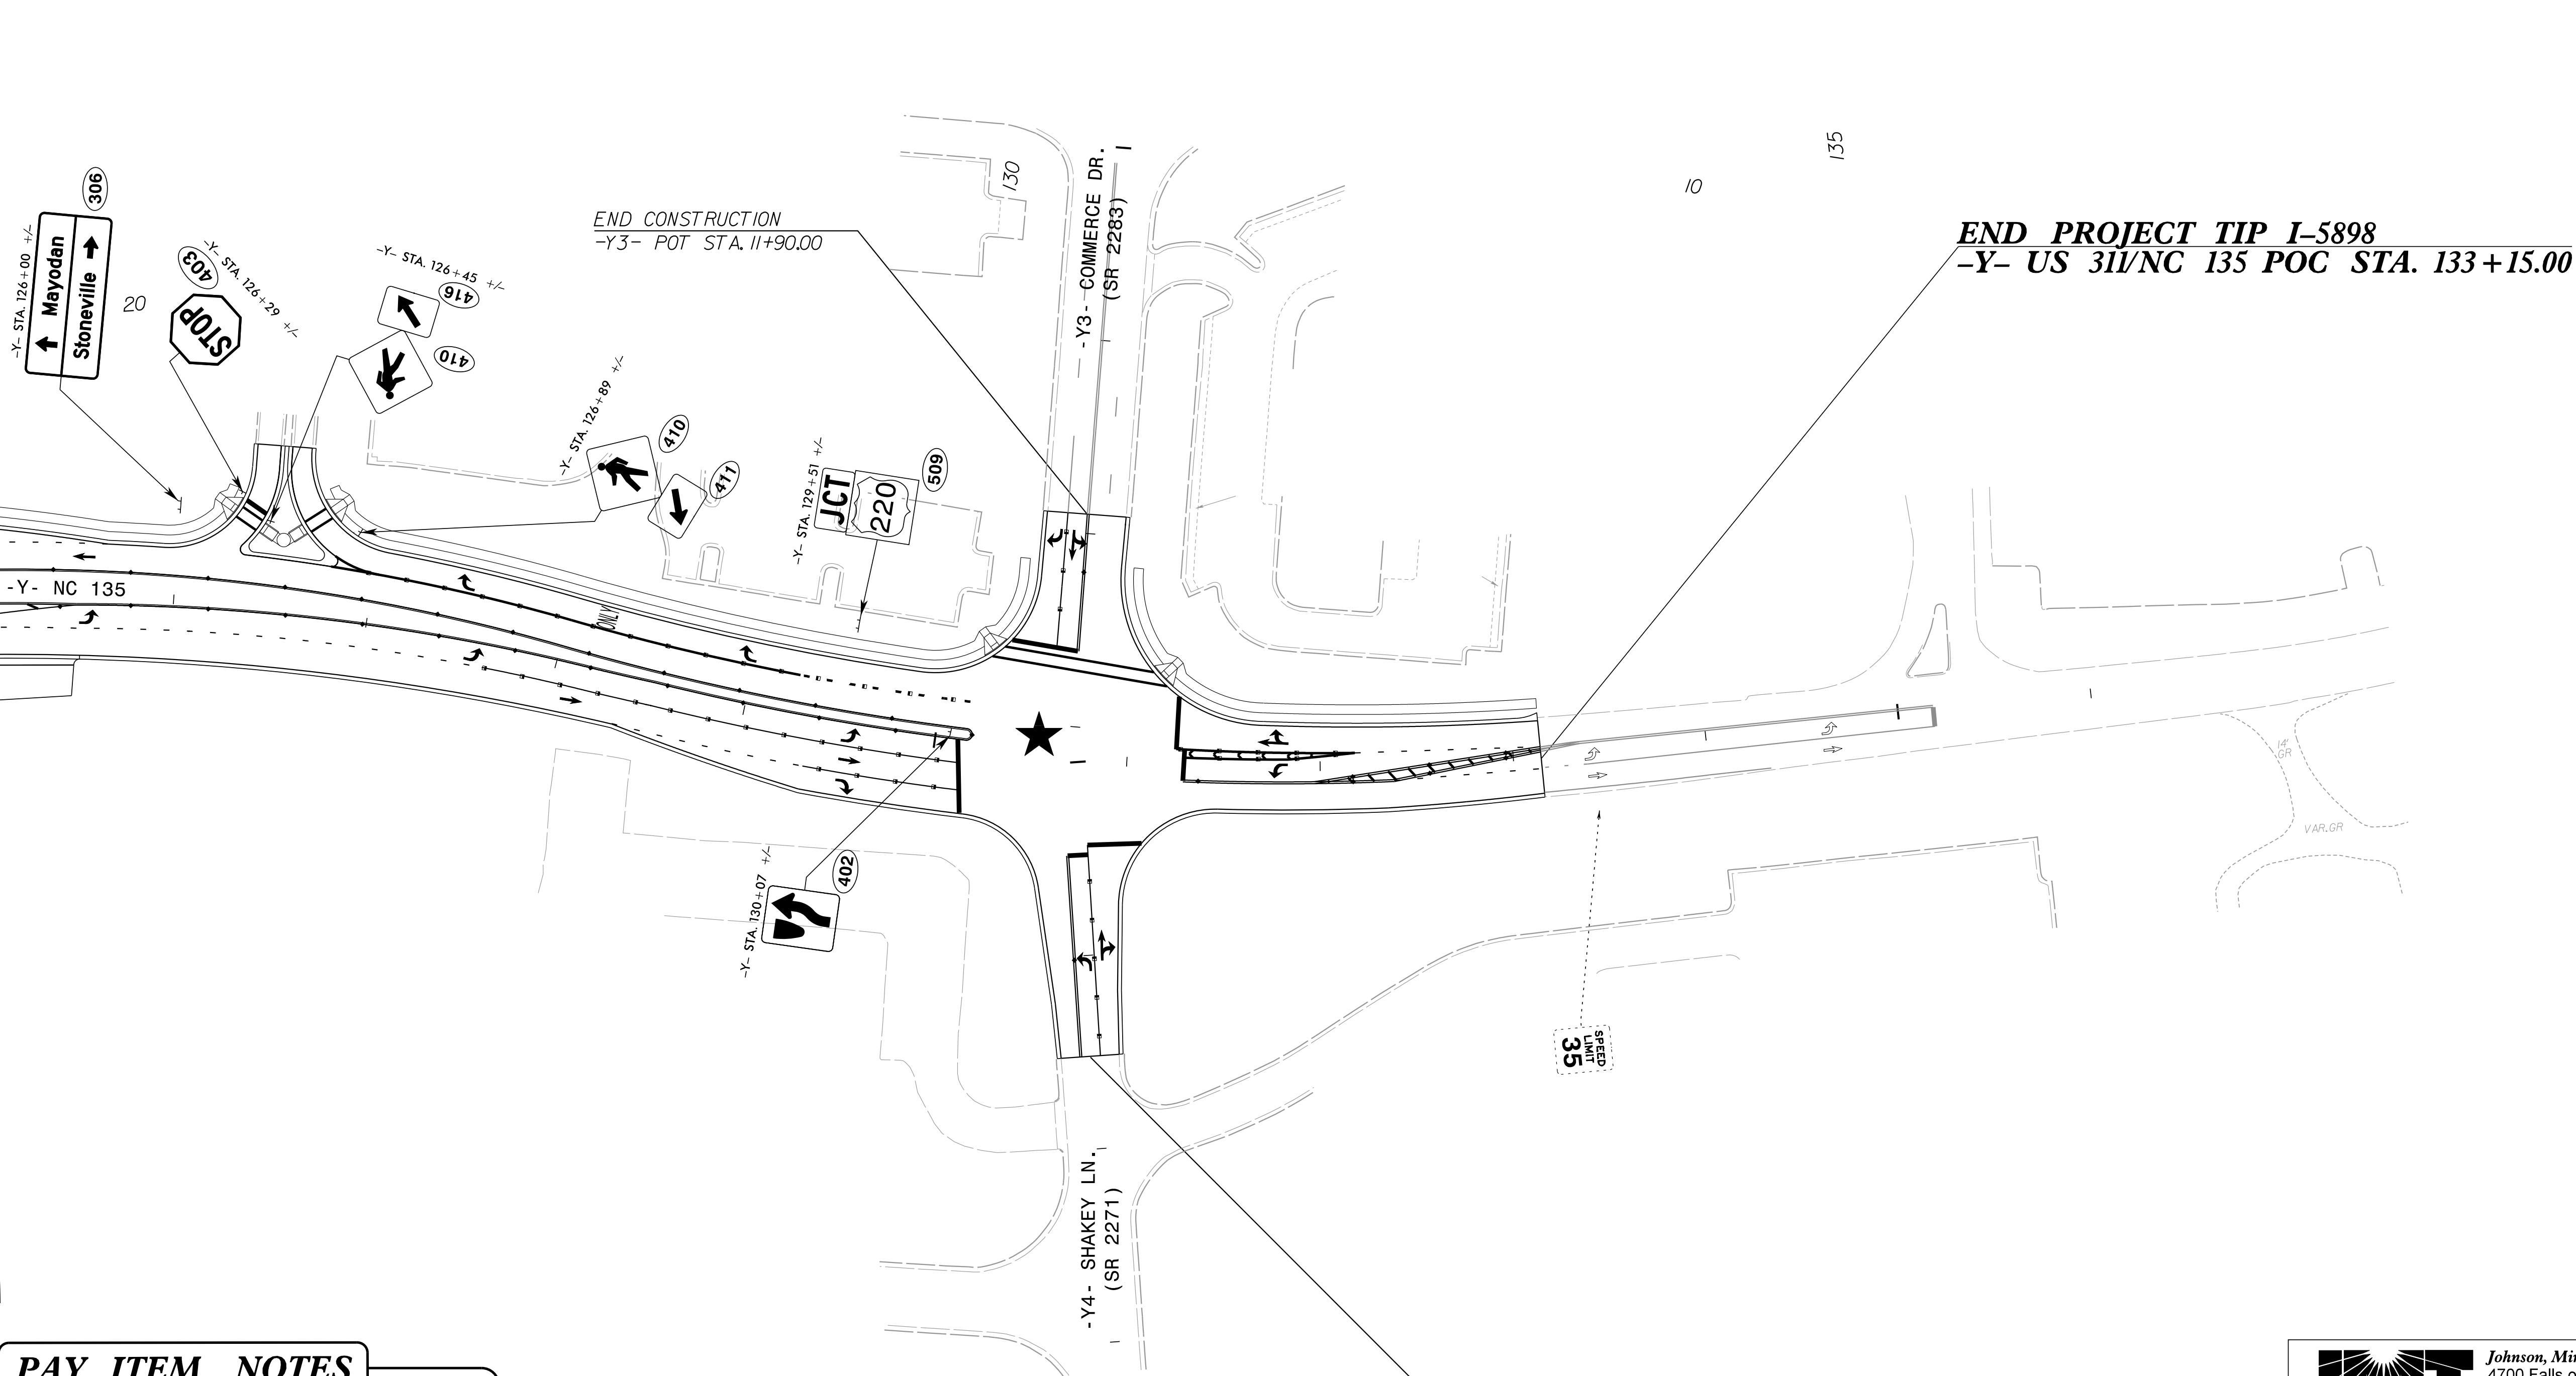

PAY ITEM NOTES

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F


REFER TO PAY ITEM NOTE 1 FOR ALL SIGNAGE ON PLAN SHEET, UNLESS OTHERWISE SPECIFIED.
PAY ITEM NOTE 2 SPECIFIES THE PROPOSED SIGN LOCATION.


END CONSTRUCTION
-Y4- SR 2271 (SHAKEY LN)
POT STA. 11+52.50






Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

PROPOSED SIGNS

TIP NO.	SHEET NO.
I-5898	SIGN-12
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

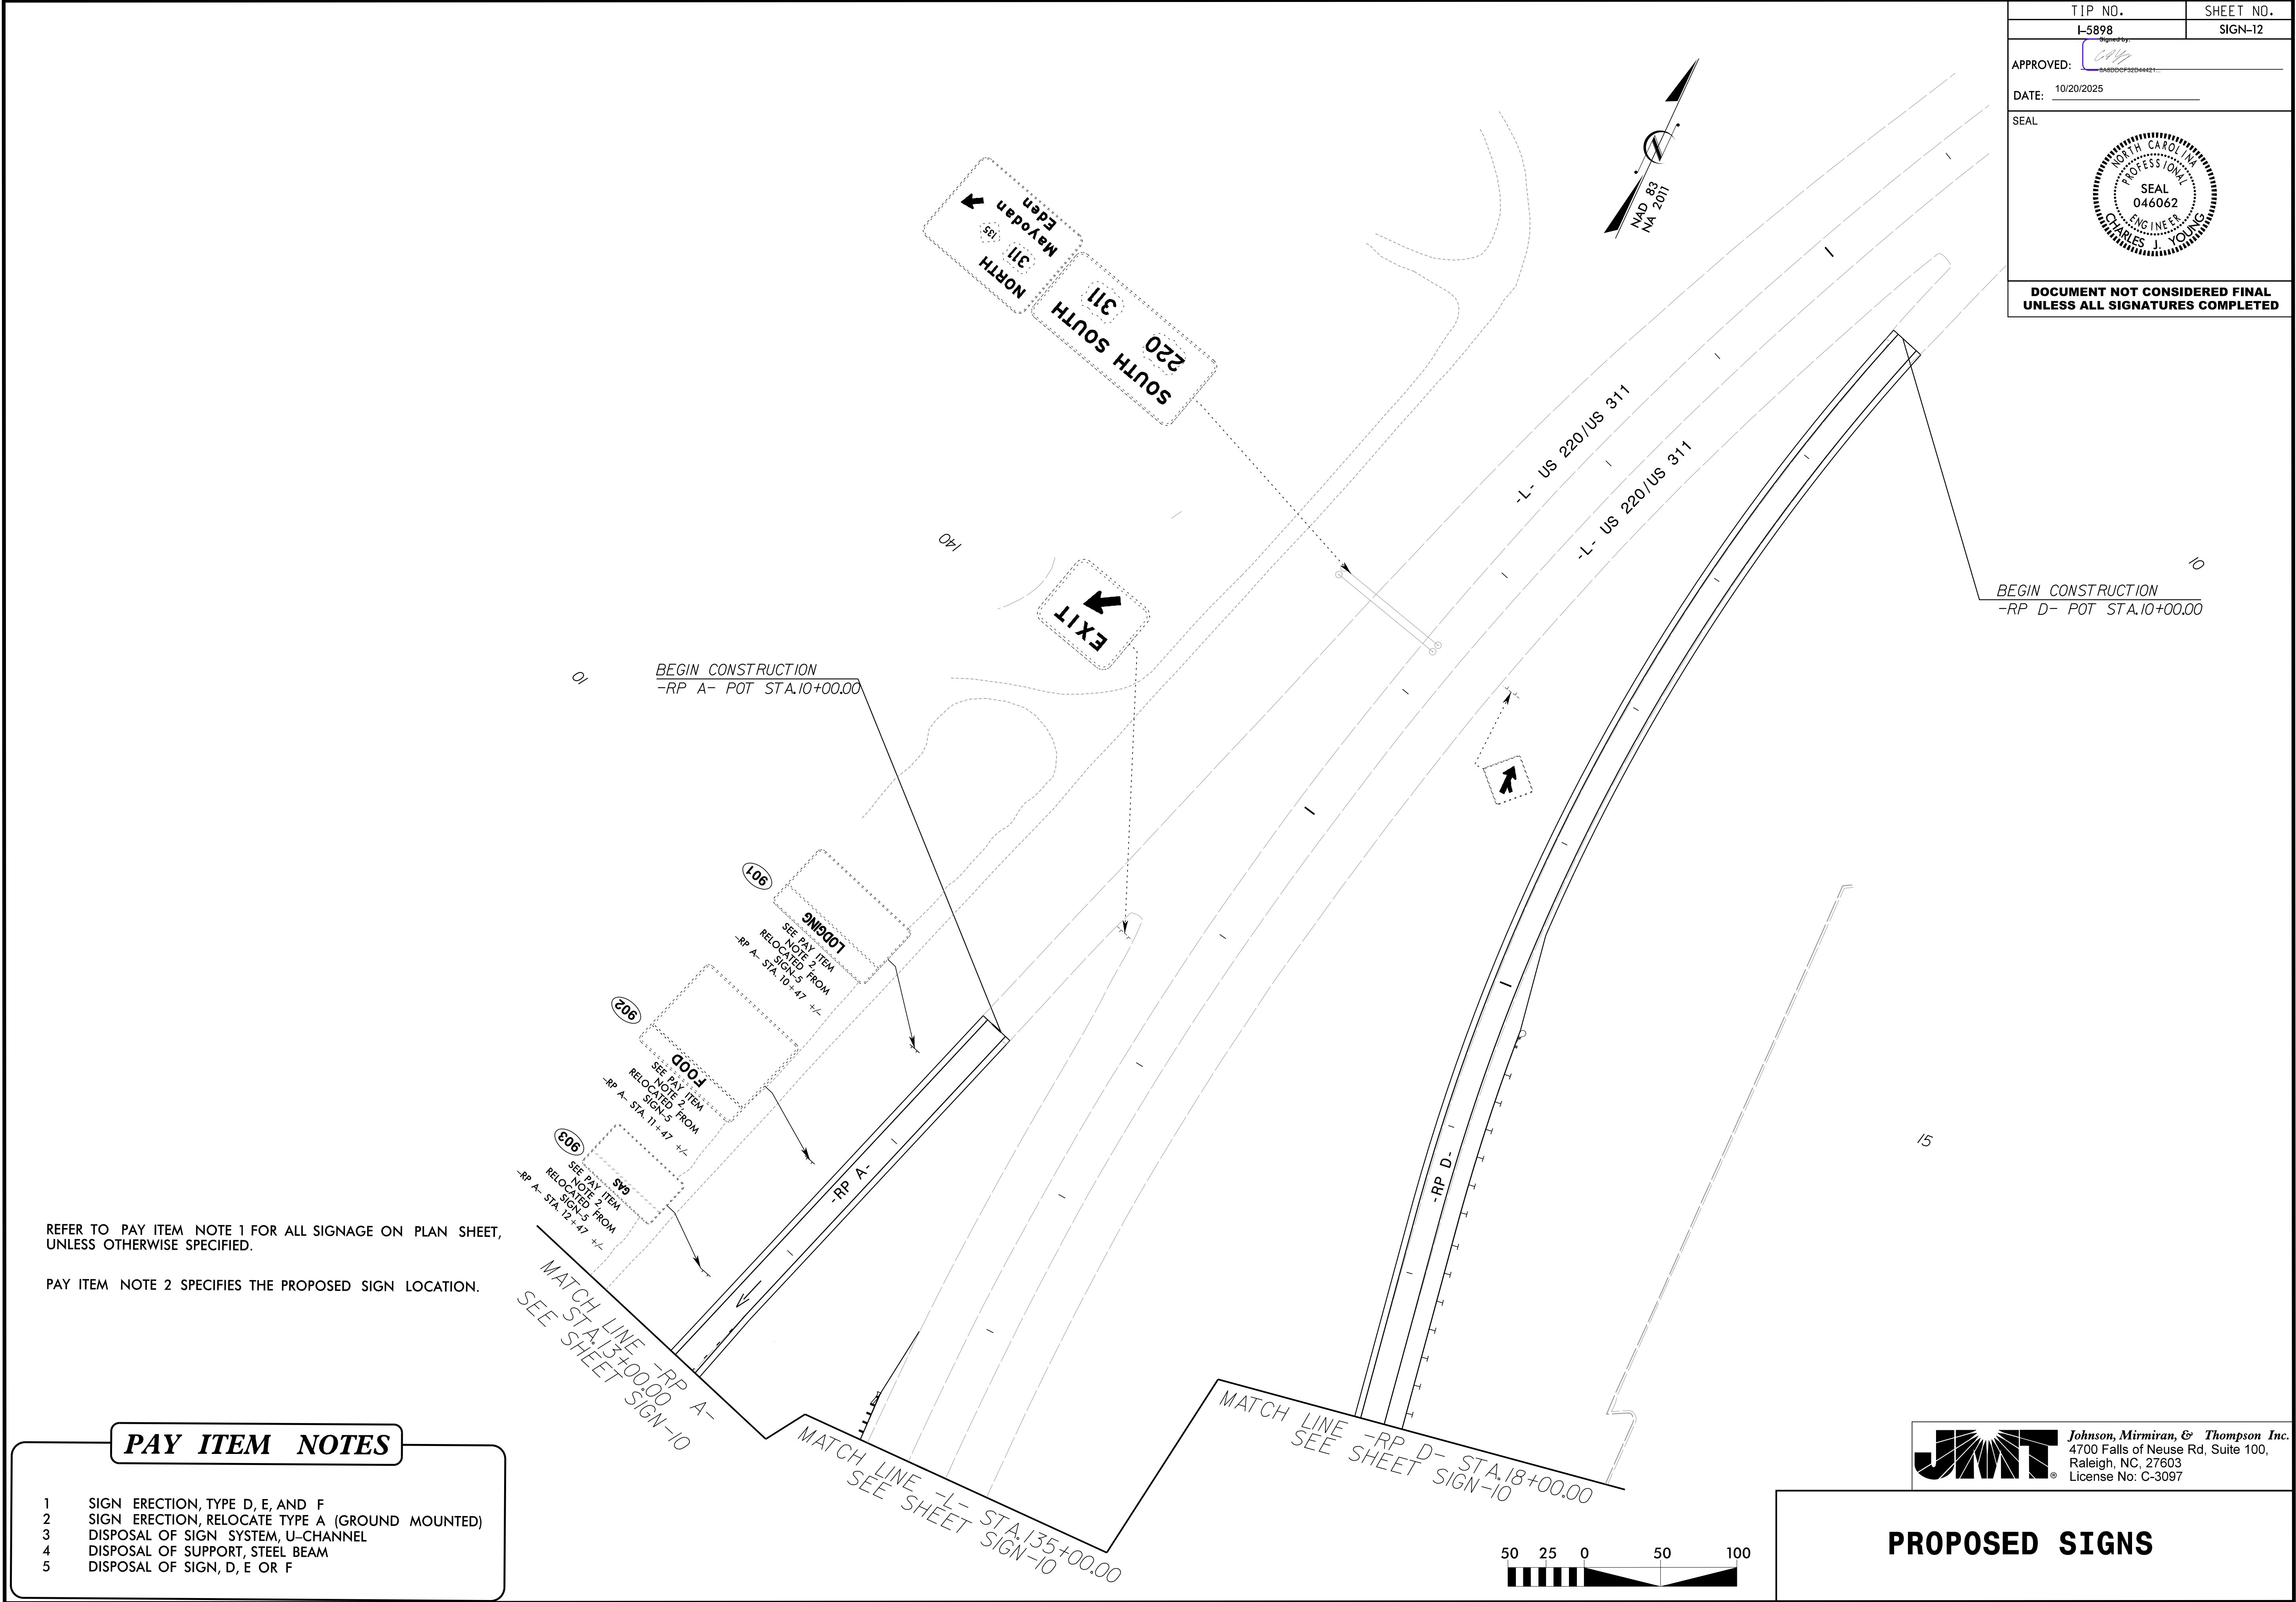

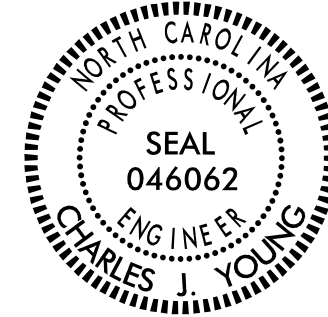TIP NO.	SHEET NO.
I-5898	SIGN-13
APPROVED: 	
DATE: 10/20/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

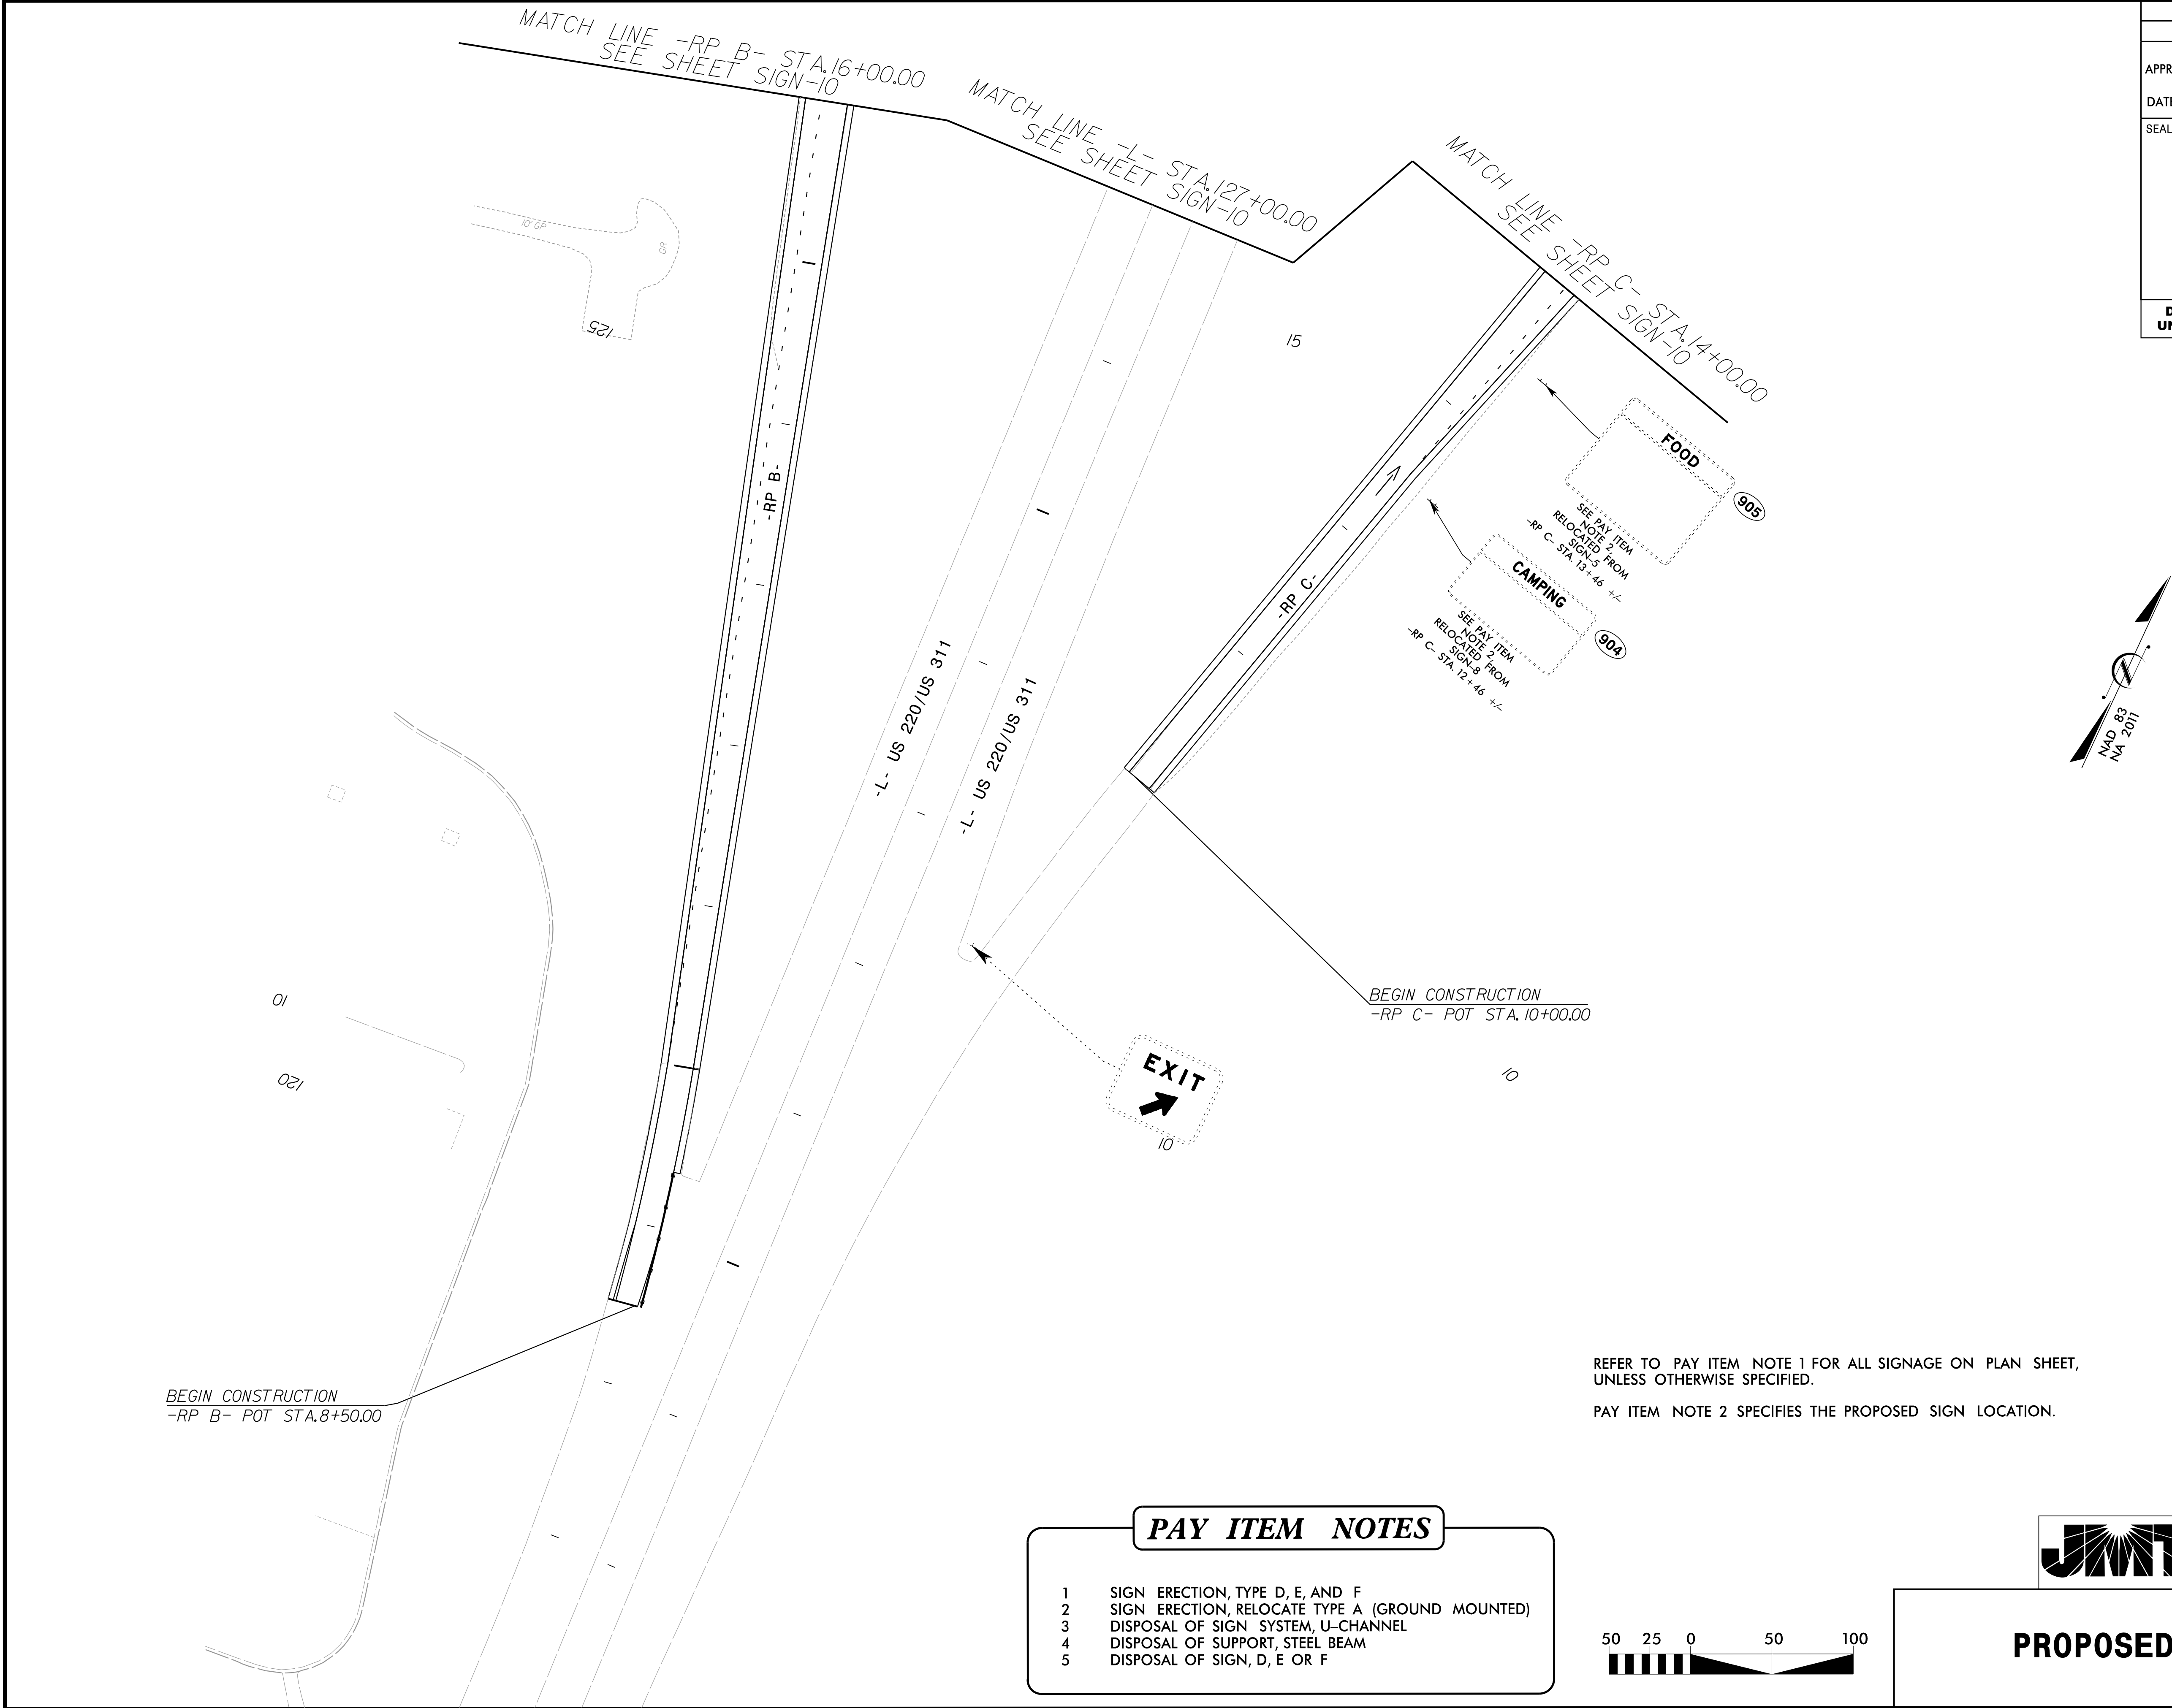

PAY ITEM NOTES

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 3 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 4 DISPOSAL OF SUPPORT, STEEL BEAM
- 5 DISPOSAL OF SIGN, D, E OR F



Johnson, Mirmiran, & Thompson Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27603
License No: C-3097

PROPOSED SIGNS