


18 CHANNEL IP CONFLICT MONITOR
PROGRAMMING DETAIL

(remove jumpers and set switches as shown)




REMOVE DIODE JUMPERS 1-5, 1-6, 1-10, 2-5, 2-6, 2-10, 4-8, AND 6-10.

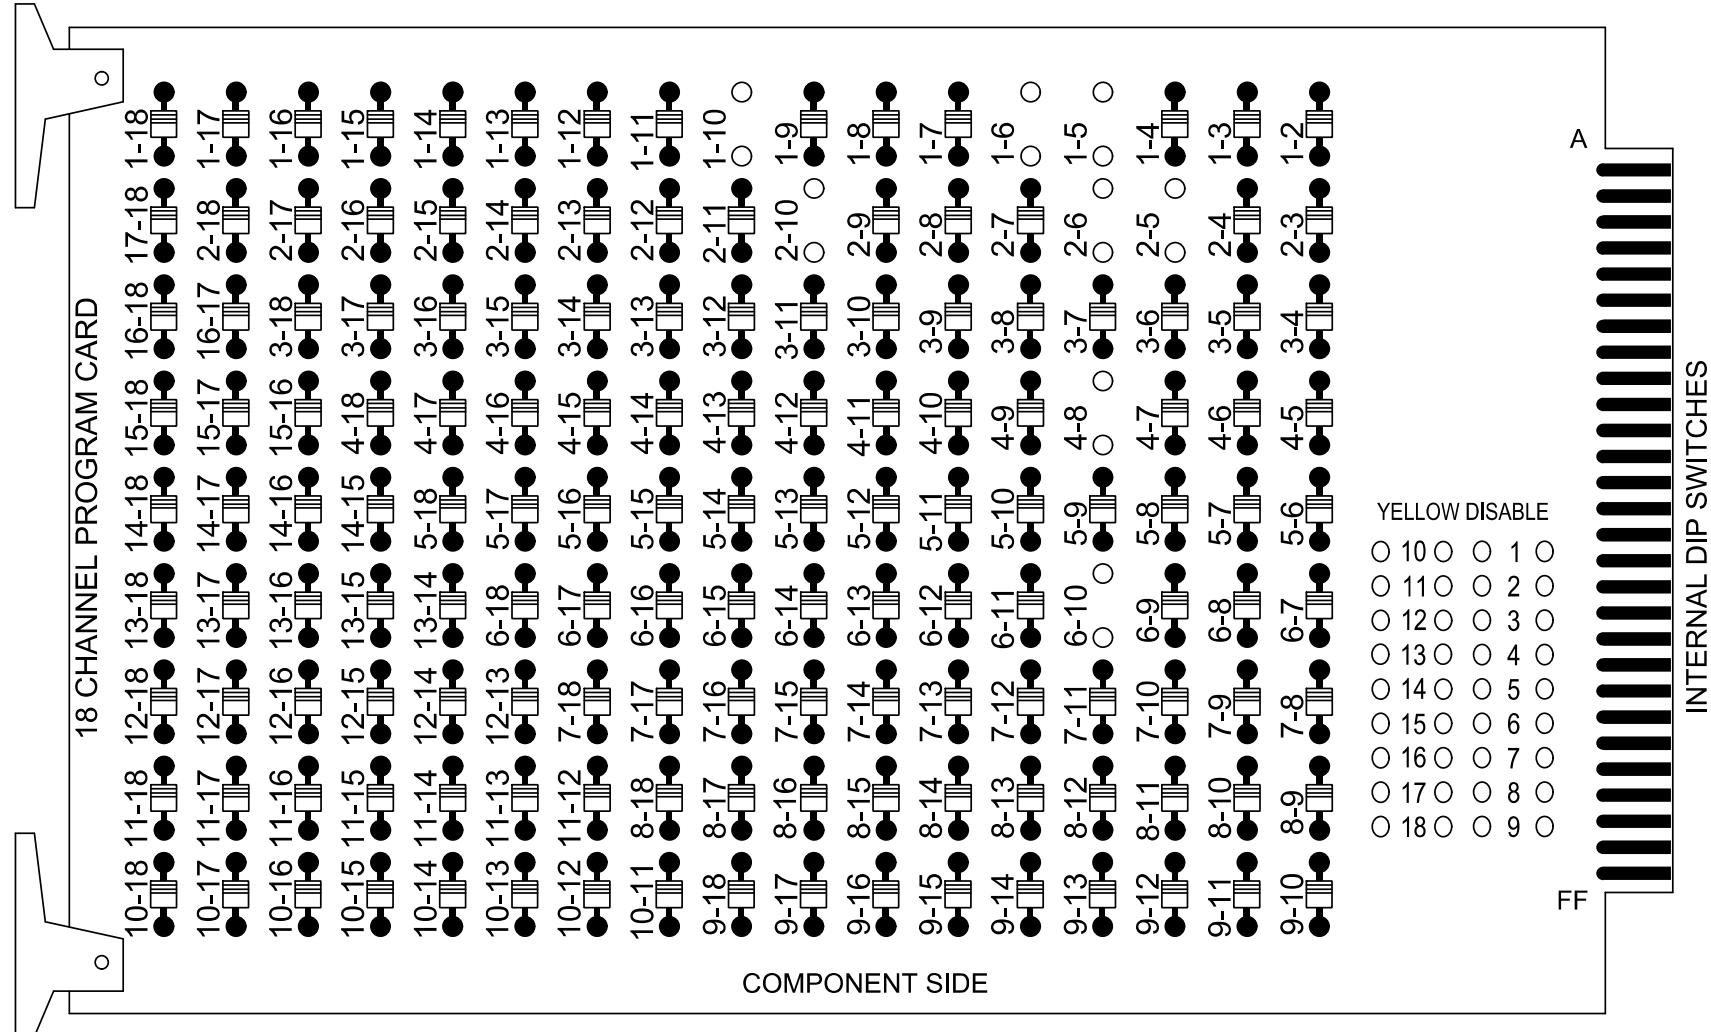

REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that the Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

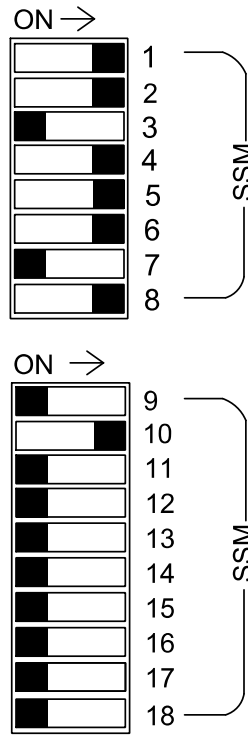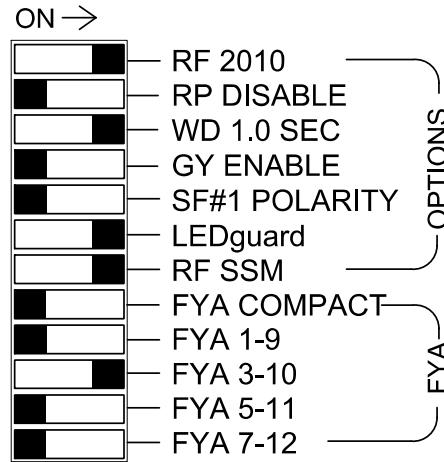

■ = DENOTES POSITION OF SWITCH

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
- Program phases 4 and 8 for Dual Entry.
- Program controller to start up in phase 2 Green No Walk and phase 6 Green No Walk.
- If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
- The cabinet and controller are part of the #D06-18 Lumberton NC 211 (N. Roberts Avenue) System.

EQUIPMENT INFORMATION

Controller.....2070LX
Cabinet.....332 w/ Aux
Software.....Q-Free MAXTIME
Cabinet Mount.....Base
Output File Positions.....18 With Aux. Output File
Load Switches Used.....S1, S2, S5, S7, S8, S11, AUX S2
Phases Used.....1, 2, 3, 4, 5, 6, 8
Overlap "1".....NOT USED
Overlap "2".....*
Overlap "3".....NOT USED
Overlap "4".....NOT USED

*See overlap programming detail on sheet 2

PROJECT REFERENCE NO.	SHEET NO.
U-5797	Sig. 4, 1

SIGNAL HEAD HOOK-UP CHART


LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	SPARE	OL3	OL4	SPARE
SIGNAL HEAD NO.	11	21,22	NU	NU	41,42	NU	51	61,62	NU	NU	81,82	NU	NU	63★	NU	NU	NU	NU
RED		128			101			134			107			A124				
YELLOW		129			102			135			108							
GREEN		130			103			136			109							
RED ARROW	125							131										
YELLOW ARROW	126							132						A125				
FLASHING YELLOW ARROW														A126				
GREEN ARROW	127							133										
Hand icon																		
Walking person icon																		

NU = Not Used

★See pictorial of head wiring in detail this sheet.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

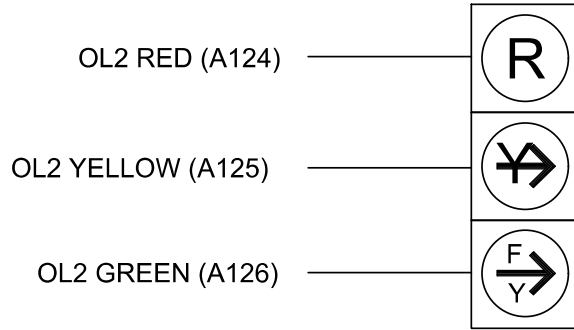


63

SPECIAL DETECTOR NOTE

Install a multizone microwave detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer -approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

INPUT FILE POSITION LAYOUT

(front view)

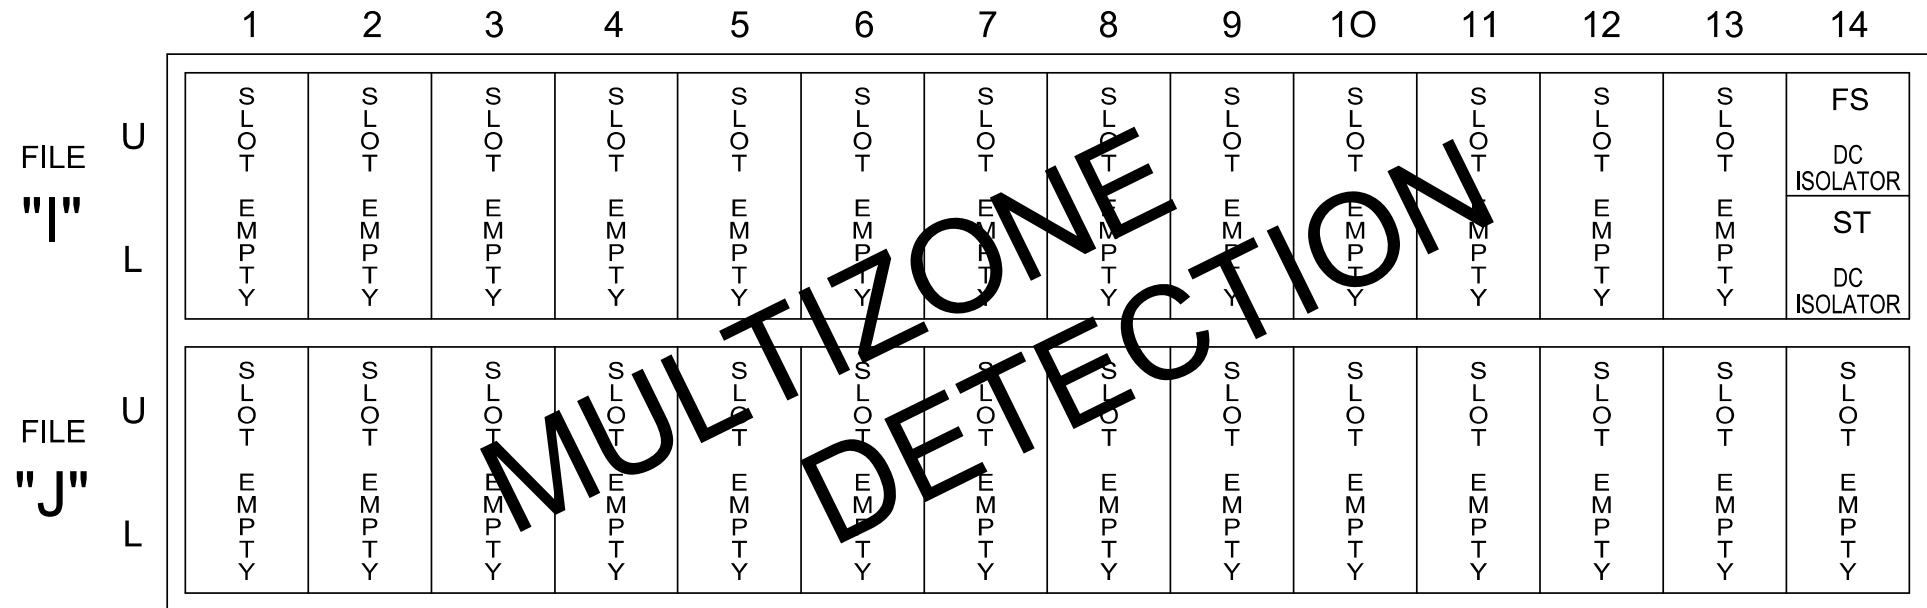

EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-0170T2
DESIGNED: Feb 2025
SEALED: 2/10/2025
REVISED:

Temporary Design 2 - TMP Phase III, Step 3
Electrical Detail - Sheet 1 of 2

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING
DETAILS FOR:

NC 211 (N. Roberts Avenue)
at
SR 1997 (Fayetteville Road)

Division 6 Robeson County Lumberton

PLAN DATE: Feb 2025 REVIEWED BY: H.M. Surti

PREPARED BY: R.L. Aristondo REVIEWED BY: T.M. Woody



REVISIONS INIT. DATE

DATE

DATE

DATE

STV
STV Engineers, Inc.
900 West Trade St., Suite 715
Charlotte, NC 28202
(704) 372-1885
NC License Number F-0991

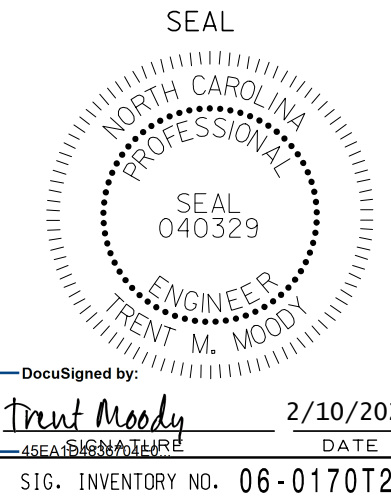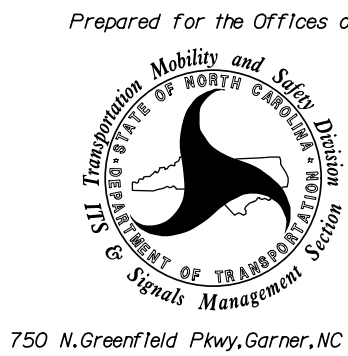

Signed by: Trent M. Moody
DATE: 2/10/2025
SEALED: 2/10/2025
SIG. INVENTORY NO. 06-0170T2