

PREEMPTION PROGRAMMING

Front Panel
Main Menu >Controller >Preemption >Preempt Phasing/Preempt Parameters

Web Interface
Home >Controller >Preempt Configuration >Preempts


Preempt Configuration

Preempt	2
Enabled	Enabled
Type	Emergency Veh
Track Phases	-
Track Overlaps	-
Dwell Phases	3, 8
Dwell Peds	-
Dwell Overlaps	2
Cycling Phases	-
Cycling Peds	-
Cycling Overlaps	-
Exit Phases	2, 6
Exit Overlaps	1, 3, 6
Delay	*
Call Ext Time	1.0
Max Presence	0
Max Pres Act	Terminate
Enter Min Green	1
Enter Walk	0
Enter Ped Clear	255
Enter Yellow Change	25.5
Enter Red Clear	25.5
Track Green	-
Track Yellow Clr	-
Track Red Clear	-
Dwell Green	*
Exit Min Green	255
Exit Yellow Change	25.5
Exit Red Clear	25.5
Exit Type	Exit Phases
Non Locking Memory	-
Not Ovrd Flash	X
Not Ovrd Nxt Pre	-
Require All Red Entry	-
Track Clear Ovrd	X
Ped Clear During Yellow	-
Entry Omit OLTG	-
Track Reserve	-

* Value to be determined in the field

PREEMPT 2 AC ISOLATOR (MODEL 252) OUTPUT PROGRAMMING DETAIL

(set DIP switches as shown below)

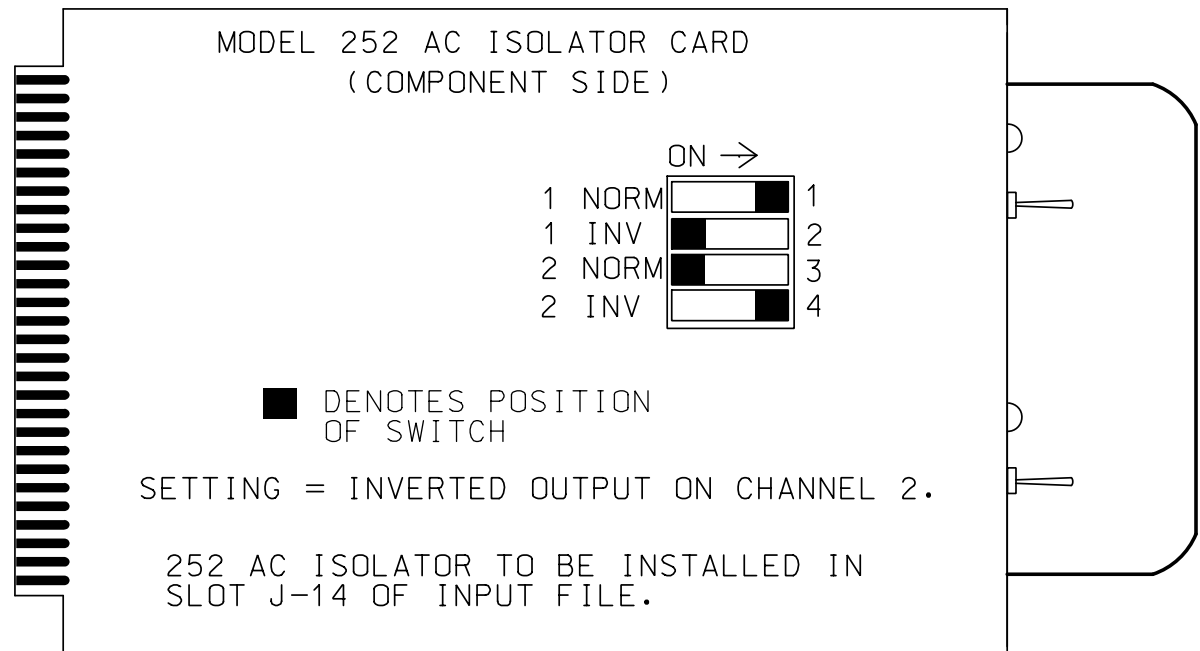


NOTE: IF ANOTHER MANUFACTURER TYPE OF AC ISOLATOR IS USED, OUTPUT PROGRAMMING IS LIKELY NOT TO EQUATE TO THAT SHOWN ABOVE.

EMERGENCY VEHICLE PREEMPTION WIRING DETAIL

(wire as shown below)

PREEMPTION AND PILOT LAMP CONTROL BOX

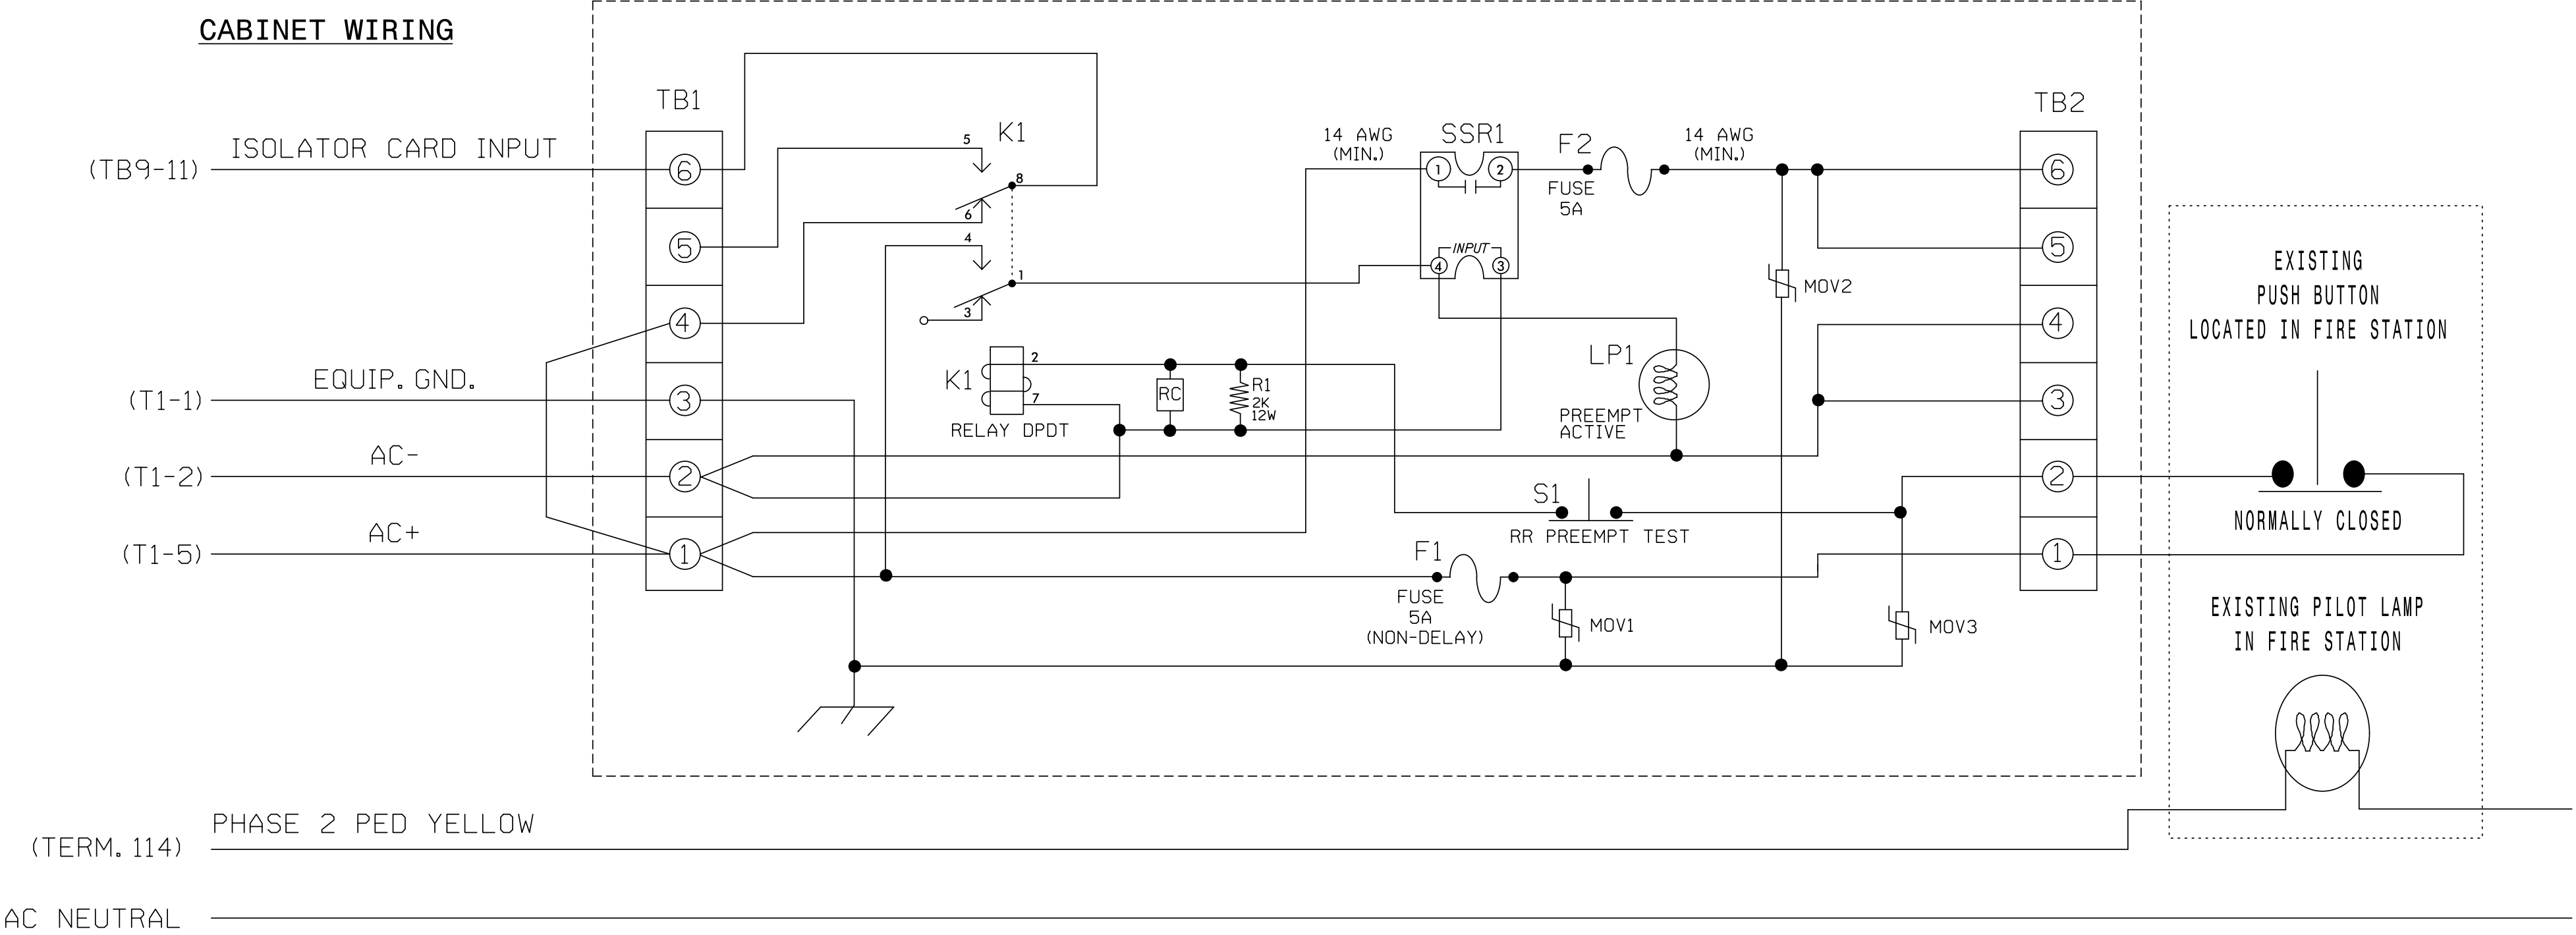


NOTES

- Relay K1 is shown in the energized (Preempt not active) normal operation state.
- Relay K1 is a DPDT Relay with 120VAC coil and octal base.
- Relay SSR1 is a SPST (normally open) Solid State Relay with AC input and AC (25 Amp) output.
- AC Isolator Card shall activate preemption upon removal of AC+ from the input (as shown above). To accomplish this, set invert dip switch on AC Isolator Card.
- Resistor is valued at 2K ohm, 12 watt.
- RC network is valued at .1 microfarad, 100 ohm.
- IMPORTANT!! A jumper must be added between input file terminals J14-E and J14-K if not already present. Also, terminal TB9-12 (on input panel) must be connected to AC neutral (jumper may have to be added).

NOTES


- If field terminal 114 has a conflict monitor wire attached, remove, tape, and label wire.
- Make sure load resistors are in place as shown in the Load Resistor Installation Detail on Sheet 1.
- Install a loadswitch in Output File Slot S3.

FRONT VIEW

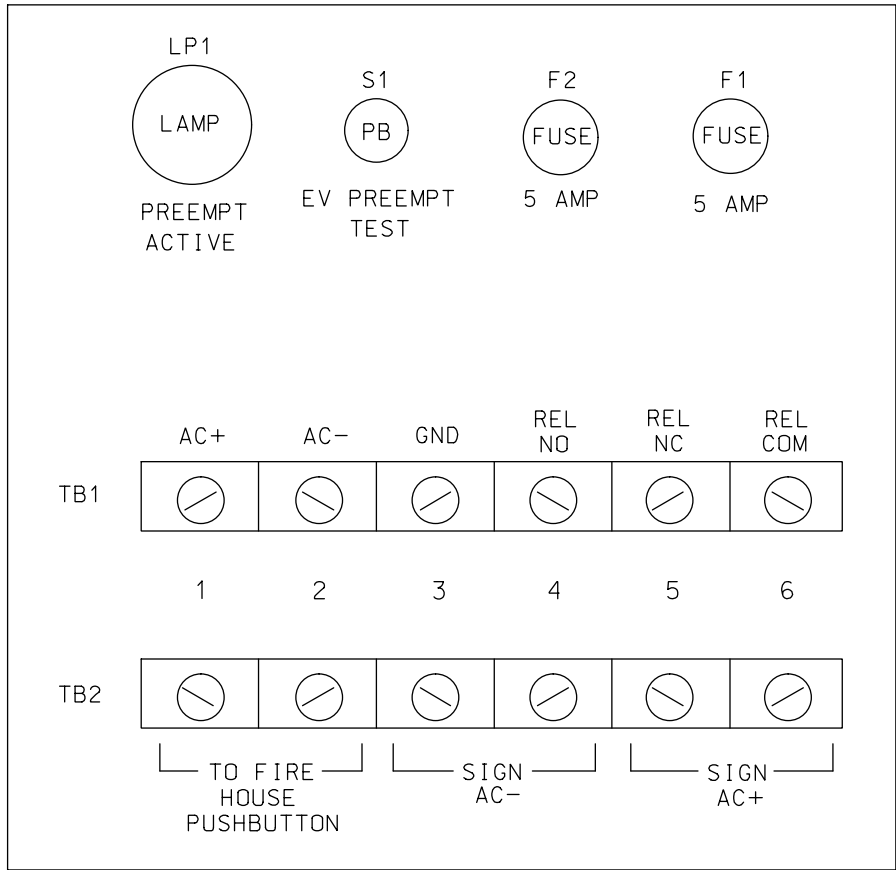

Final Design
Electrical Detail - Sheet 3 of 3

stv
STV Engineers, Inc.
900 West Trade St., Suite 715
Charlotte, NC 28202
(704) 372-1885
NC License Number F-0991

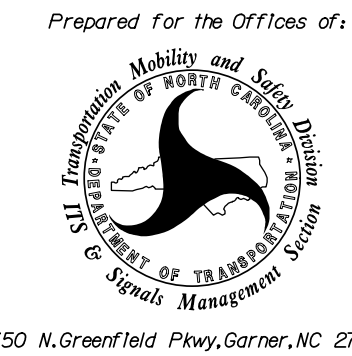

NC 211 (N. Roberts Avenue)
at
Walnut Street

Division 6	Robeson County	Lumberton
PLAN DATE: Feb 2025	REVIEWED BY: H.M. Surti	
PREPARED BY: R.L. Aristondo	REVIEWED BY: T.M. Woody	
REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

