PRELIMINARY SITE ASSESSMENT

SR 1997 (FAYETTEVILLE ROAD) WIDENING TIP NO. U-5797, WBS NO. 44367.1.1

NCDOT PARCEL NO. 18
OWNER: FAYETTEVILLE ROAD INVESTORS II LLC
3001 FAYETTEVILLE ROAD
LUMBERTON, ROBESON COUNTY, NORTH CAROLINA



PREPARED FOR:
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
C/O STV ENGINEERS, INC.
1600 PERIMETER PARK DRIVE, SUITE 225
MORRISVILLE, NC 2756002

PREPARED BY: FALCON ENGINEERING, INC. 1210 TRINITY ROAD, SUITE 110 CARY, NC 27513

PROJECT NUMBER: G19011.00 JUNE 9, 2020





June 9, 2020

Mr. Patrick Livingston, PE STV Engineers, Inc. 900 W. Trade St, Suite 715 Charlotte, NC 28202

Re: Preliminary Site Assessment

SR 1997 (Fayetteville Road) Widening TIP No. U-5797, WBS No. 44367.1.1 Parcel No. 18 Owner: Fayetteville Road Investors II LLC 3001 Fayetteville Road Lumberton, Robeson County, North Carolina

Dear: Mr. Livingston:

Falcon is pleased to present the following Preliminary Site Assessment in support of the above-mentioned Project. Specifically, Falcon sampled soil in proximity to the project limits on this parcel in general accordance with the approved scope of work. Soils requiring remediation or special handling during construction were not identified.

Falcon recommends if drums, USTs, above ground storage tanks (ASTs), petroleum odors or sheen are observed during any excavation associated with any property involved in the project that all work in the vicinity stop until further assessment takes place. Further assessment can include but is not limited to; sampling the soil and groundwater, excavation, and proper handling and disposal of contaminated soils and groundwater.

Please review this report and advise us if you have any questions or concerns. We appreciate this opportunity to provide services to you and look forward to partnering with you on future projects. If you have any questions, please give Falcon a call at (919) 871-0800.

Sincerely,

FALCON ENGINEERING, INC.

Christopher J. Burkhardt Environmental Services Manager Jeremy R. Hamm, PE Geotechnical Services Manager



TABLE OF CONTENTS

SECTI	ION 1: INTRODUCTION	5
	1.1 DESCRIPTION	5
	1.2 SCOPE OF WORK	5
SECT	ION 2: HISTORY	6
	2.1 PARCEL USAGE	6
	2.2 FACILITY IDENTIFICATION NUMBER	6
	2.3 GROUNDWATER INCIDENT NUMBER	6
SECTI	ION 3: SITE OBSERVATIONS	7
	3.1 GROUNDWATER MONITORING WELLS	
	3.2 ACTIVE USTS	7
	3.3 FEATURES APPARENT BEYOND ROW/EASEMENT	7
SECT	ION 4: METHODOLOGY	8
	4.1 GEOPHYSICS	
	4.2 BORINGS	8
	4.3 SAMPLE PROTOCOL	8
SECT	ION 5: RESULTS	10
	5.1 GEOPHYSICS	10
	5.2 SAMPLE DATA	10
	TABLE NO. 1 BORING COORDINATES	
	TABLE NO. 2 PID READINGS	
	TABLE NO. 3 SUMMARY OF UVF SOIL SAMPLING RESULTS	
	5.3 SAMPLE OBSERVATIONS	
	TABLE NO. 4 SOIL OBSERVATIONS	
SECTI	ION 6: CONCLUSIONS	
SECTI	6.1 INTERPRETATION OF RESULTS	
	6.2 GEOPHYSICS	
	6.3 SAMPLING	
	6.4 QUANTITIES	
SECT	ION 7: RECOMMENDATIONS	
	7.1 ADDITIONAL SAMPLING	
	7.2 SPECIAL HANDLING OF IMPACTED SOIL	14



LIST OF FIGURES AND ATTACHMENTS

VICINITY MAP

USGS TOPOGRAPHIC MAP

PARCEL LOCATION MAP

BORING LOCATION MAP

AERIAL PHOTOGRAPHS

SITE PHOTOGRAPHS

UNDERGROUND STORAGE TANK DOCUMENTATION

LABORATORY RESULTS

GEOPHYSICAL SURVEY



SECTION 1: INTRODUCTION

1.1 DESCRIPTION

Falcon Engineering, Inc. (Falcon) has completed a Preliminary Site Assessment of NCDOT TIP Project U-5797 Parcel No. 18. Parcel No. 18 is addressed as 3001 Fayetteville Road, Lumberton Robeson County, North Carolina. NCDOT is proposing to widen Fayetteville Road (SR 1997) from Farringdom Street to 22nd Street. The limits of the assessment are between the existing edge of NCDOT maintained pavement (within the existing NCDOT ROW) where accessible, and the proposed NCDOT ROW and/or easement (whichever boundary represents the largest area). Boring locations were placed in the vicinity of proposed excavations for drainage features, utilities, and roadway/ditch cuts to determine if soils requiring remediation or special handling were present where excavation was planned to take place.

1.2 SCOPE OF WORK

Falcon's scope of work included coordination of; public and private utility location near the proposed borings, geophysical surveys, collecting soil samples using direct push technology, and laboratory analysis. Samples were analyzed for petroleum hydrocarbons via UVF technology.



SECTION 2: HISTORY

2.1 PARCEL USAGE

Falcon performed a Phase I Environmental Site Assessment (ESA) for U-5797 under Project No. G17057 dated April 2018. The ESA identified this parcel as a Recognized Environmental Condition (REC) based on the history of the parcel and adjoining parcels. Falcon contacted Mr. Joe Oliver the County Fire Marshal during the ESA to inquire about known USTs along Fayetteville Road in the general area of Parcel No. 18. Mr. Oliver sent documents pertaining to USTs that had been installed and/or removed from Baxley's addressed as Highway 211 East, and Taco Bell addressed as Fayetteville Road and Roberts Ave. The exact location of USTs associated with these facilities is not known. Historic air photographs dated 1976 through 2000 show Parcel No. 18 developed with a small commercial building, and a larger commercial building and parking lot adjoining Parcel No. 18 to the west and north. UST closure documentation including soil sampling results was not available for review.

2.2 FACILITY IDENTIFICATION NUMBER

A Facility Identification Number was not identified for this parcel.

2.3 GROUNDWATER INCIDENT NUMBER

A Groundwater Incident Number was not identified for this parcel.



SECTION 3: SITE OBSERVATIONS

3.1 GROUNDWATER MONITORING WELLS

Groundwater monitoring wells (MWs) were not observed on this parcel.

3.2 ACTIVE USTS

Active USTs were not observed within the project limits or registered at this parcel.

3.3 FEATURES APPARENT BEYOND ROW/EASEMENT

USTs, monitoring wells, remediation systems, or hydraulic lifts were not observed.



SECTION 4: METHODOLOGY

4.1 GEOPHYSICS

Pyramid Geophysical Services (Pyramid) was subcontracted to perform a geophysical survey of the assessment area. The assessment area is between the existing edge of NCDOT maintained pavement (within the existing NCDOT ROW) where accessible, and the proposed NCDOT ROW and/or easement (whichever boundary represents the largest area). The survey was used to locate private utility lines, as well as possible indications of USTs, and/or their pits.

The geophysical investigation consisted of electromagnetic (EM) induction-metal detection and ground penetrating radar (GPR) surveys. Pyramid collected the EM data using a Geonics EM61-MK2 (EM61) metal detector integrated with a Geode External GPS/GLONASS receiver. The integrated GPS system allows the location of the instrument to be recorded in real-time during data collection, resulting in an EM data set that is georeferenced and can be overlain on aerial photographs and CADD drawings.

The GPR data was acquired across select EM anomalies (where identified), using a Geophysical Survey Systems, Inc. (GSSI) UtilityScan DF unit equipped with a dual frequency 300/800 MHz antenna. Pyramid marked their findings on the surface with paint. A boundary grid was established around the perimeter of the site with marks every 10 feet to maintain orientation of the instrument throughout the survey and to obtain adequate coverage. A copy of the full Geophysical Report is included in the Attachments.

4.2 BORINGS

Regional Probing was subcontracted to advance soil borings using direct push technology. Regional Probing used a truck-mounted Geoprobe® 5410 unit mounted on an off-road modified Ford F350 Diesel 4x4. The unit has auger-capabilities and is equipped with a GH-42 soil-probing hammer, with 21,700 pounds of down force and 28,900 pounds of retraction force. The unit has an on-board tank for decontaminating the geoprobe rods before advancing the probe at each sample location.

4.3 SAMPLE PROTOCOL

Prior to initiating sample collection Falcon contacted NC One Call and requested public utility locations be marked around the proposed sample locations. Sampling was in general accordance with the NC Department of Environmental Quality (DEQ) Division of Waste Management's (DWM) "Guidelines for Site Checks, Tank Closure, and Initial Response and Abatement for UST Releases" (March 1, 2007 Version Change 9 – February 1, 2019) guidance document. Sampling strategy was derived based upon the project scope and objectives as outlined above. Red Lab, LLC was selected to perform the UVF laboratory analytical analysis. Appropriate sterile containers were received by Falcon from Red Lab prior to beginning the fieldwork. The containers were labeled appropriately.

A Minirae 3000 photoionization detector (PID) was used to field screen samples for volatile organics to determine if a release had occurred. The instrument was calibrated per manufacturer instructions prior to use. Falcon staff bagged composite soil samples of each boring in approximately two-foot sections. Representative samples were placed in a sealed plastic bag for approximately 10 minutes to allow soil hydrocarbons to reach equilibrium within the headspace prior to scanning with the PID. One sample per boring was collected from the depth of the proposed cut or from the section above the depth of cut with the highest PID reading.

To avoid cross contamination, a new unused pair of non-powdered nitrile gloves was worn while extracting each sample. Samples were placed in the appropriate laboratory provided containers. The labels on each container were then completed so that each provided the date and time of sampling, method of analysis, sample collector, preservative used and sampling location identification. Samples were placed in an ice filled cooler and transported to the lab. Appropriate chain-of-custody procedures, including the completion of necessary forms, were followed.

SECTION 5: RESULTS

5.1 GEOPHYSICS

The geophysical investigation was performed between March 18 and March 26, 2019 to investigate for metallic underground storage tanks (USTs) beneath the survey area. A total of eleven EM anomalies were identified. The majority of the EM anomalies were directly attributed to visible cultural features at the ground surface. Several EM anomalies were associated with suspected utilities and interference from vehicles and were further investigated with GPR.

GPR recorded small, low-amplitude anomalies, consistent with suspected utilities. GPR also recorded minor reflectors that were suggestive of possible buried metallic debris. No evidence of any larger structures such as USTs was observed.

5.2 SAMPLE DATA

Falcon and our subcontractor advanced five borings (B-20 through B-24) to the proposed excavation depth of the drainage features, utilities, or roadway/ditch cut being assessed. Groundwater was not observed. Please see the Boring Layout Plan in the attachments for a visual depiction of the sample locations. The coordinates (latitude and longitude) that correspond to the sample locations are shown below in Table No. 1 Boring Coordinates.

TABLE NO. 1 BORING COORDINATES

Boring	Latitude	Longitude
B-20	34.6395832	-79.0017437
B-21	34.6393869	-79.0013177
B-22	34.6395619	-79.0012098
B-23	34.6398805	-79.0010772
B-24	34.6400881	-79.0010401

Borings were field screened with a PID in sections for evidence of volatile organics. The PID screening results are presented in Table No. 2 PID Readings. Falcon selected soil samples based on the field screening results and the needs of the project. Red Lab analyzed the selected samples and their full analytical report is attached. The results of the laboratory analysis are shown in Table No. 3 Summary of UVF Soil Sampling Results.

Petroleum hydrocarbons above State Action Levels were not detected in the samples.

TABLE NO. 2 PID READINGS

Boring	Depth BGS*	PID**
B-20	0-2.5	0.6
B-21	0-2.5	0.4
D-21	2.5-5.0	0.5
B-22	0-5.0	1.2
B-23	0-2.5	1.1
D-23	2.5-5.0	1.1
B-24	0-2.5	0.9
D-24	2.5-5.0	0.7

^{*}BGS = Depth below ground surface in feet

Samples shown in **bold** were selected for analysis

TABLE NO. 3 SUMMARY OF UVF SOIL SAMPLING RESULTS

C 1	BTEX	GRO	DRO	ТРН	Total	16			Ratios		нс
Sample ID	(C6 - C9)	(C5 - C10)	(C10 - C35)	(C5 - C35)	Aromatics (C10-C35)	EPA PAHs	BaP	% light	% mid	% heavy	Fingerprint Match
B-20	<0.57	<0.57	12.7	12.7	6.4	0.32	<0.023	0	76.5	23.5	V.Deg.PHC 96.9%,(FCM)
B-21	<0.27	<0.27	1.2	1.2	0.55	<0.09	<0.011	0	78.8	21.2	Deg.PHC 80.6%,(FCM)
B-22	<0.28	<0.28	<0.28	0.18	0.18	<0.09	<0.011	0	61.6	38.4	Residual HC,(BO)
B-23	<0.27	<0.27	<0.27	<0.27	< 0.05	<0.09	<0.011	0	0	0	FCM)
B-24	<0.18	<0.18	<0.18	<0.18	<0.04	<0.06	<0.007	0	0	0	,(FCM),(BO)

Results reported in mg/kg (milligrams per kilogram)

^{**}PID readings are in parts per million

5.3 SAMPLE OBSERVATIONS

Obvious indications of a release (stained soils, odors, or oily sheen) were not observed. Table No. 4 Soil Observations lists visual soil observations of color and texture.

TABLE NO. 4 SOIL OBSERVATIONS

Sample ID	Depth	Color	Soil Type
B-20	0-2.5	Brown Tan	Slightly Clayey Silty Sand (A-2-4)
B-21	0-2.5	Gray Brown	Silty Clayey Sand (A-2-6)
D-21	2.5-5.0	Dark Brown & Tan	Silty Clayey Sand (A-2-6)
B-22	0-5.0 (Compressed)	Brown Orange	Silty Sandy Clay (A-6)
B-23	0-2.5	Brown	Sandy Clay (A-6)
D-23	2.5-5.0	Orange Gray (mottled)	Sandy Clay (A-6)
B-24	0-2.5	Brown	Sandy Clay (A-6)
D-24	2.5-5.0	Brown Tan	Sandy Clay (A-6)

Depth is in feet below ground surface

5.4 QUANTITIES CALCULATIONS

Soils requiring quantity calculations were not identified.

SECTION 6: CONCLUSIONS

6.1 INTERPRETATION OF RESULTS

This Preliminary Site Assessment was performed to evaluate the soils in proximity to the project limits on this parcel for the presence of petroleum hydrocarbons. The findings are as follows:

> Soil sampling completed on the parcel did not identify contaminants in the soil at levels requiring remediation.

6.2 GEOPHYSICS

Collectively, the geophysical data did not record evidence of unknown metallic USTs within the geophysical survey area at Parcel 18. Falcon does not anticipate USTs will be encountered within the project limits on this parcel during construction.

6.3 SAMPLING

Sampling results did not identify contaminates in the soil which require remediation in the areas sampled. Based on past project experience, Falcon does not anticipate soil remediation or special handling and disposal will be required during construction on this parcel.

6.4 QUANTITIES

Soils requiring quantities calculations were not identified.



SECTION 7: RECOMMENDATIONS

7.1 ADDITIONAL SAMPLING


Contaminants above the Industrial / Commercial Soil Cleanup Levels were not identified; therefore, additional assessment is not warranted at this time. Falcon recommends if drums, USTs, above ground storage tanks (ASTs), petroleum odors or sheen are observed during any excavation associated with any property involved in the project that all work in the vicinity stop until further assessment takes place. Further assessment can include but is not limited to; sampling the soil and groundwater, excavation, and proper handling and disposal of contaminated soils and groundwater.

7.2 SPECIAL HANDLING OF IMPACTED SOIL

Soils requiring special handling were not identified. If suspect contaminated soils are encountered during construction Falcon and the NCDOT GeoEnvironmental Group should be contacted for proper handling instructions.

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment Vicinity Map




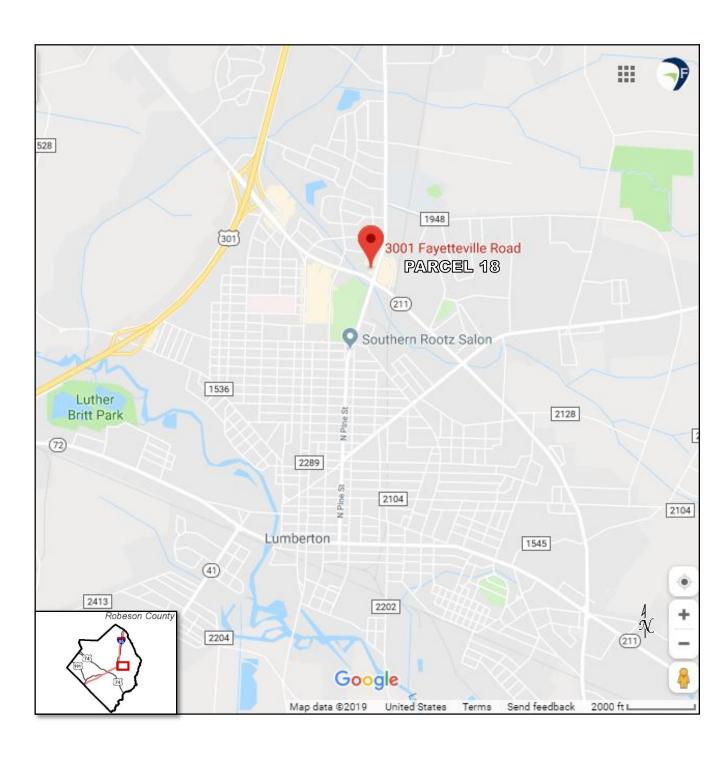

Project No.: G19011.00
Date: September 2019
Source: Google Maps

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment USGS Topographic Maps



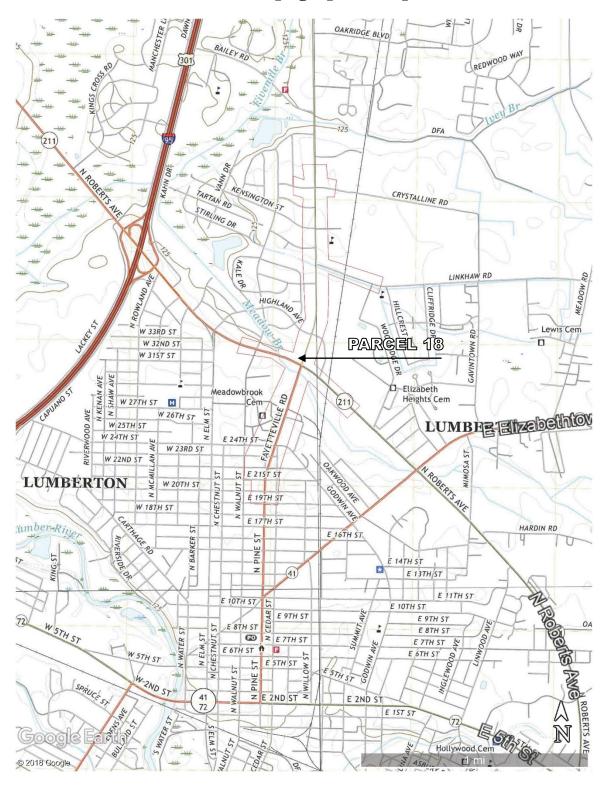

Project No.: G19011.00 Date: September 2019

Source: "NW, NE, SW, and SE Lumberton, NC" 2019

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment Parcel Location Map








County Line

City Limits


— Streets

Parcels

Project No.: G19011.00
Date: September 2019
Source: Robeson County GIS



Esrl, HERE, Garmin, (c) OpenStretMap contributors, and the GIS user community. Source: Esrl, DigitalGibbe, GeoEye, Earthstar Geographibs, CNES/Altibus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

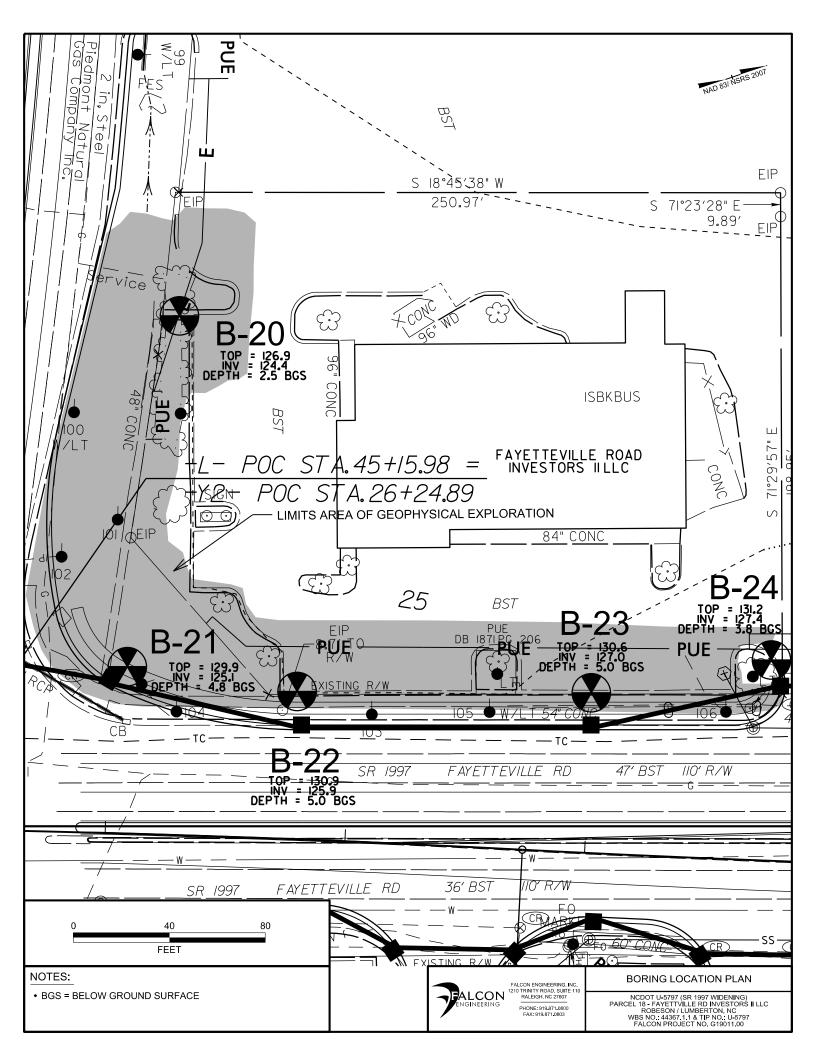

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment 1990 Aerial Photograph






Project No.: G19011.00 Date: September 2019

Source: NCDOT Historical Aerial Imagery Index

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment 1986 Aerial Photograph



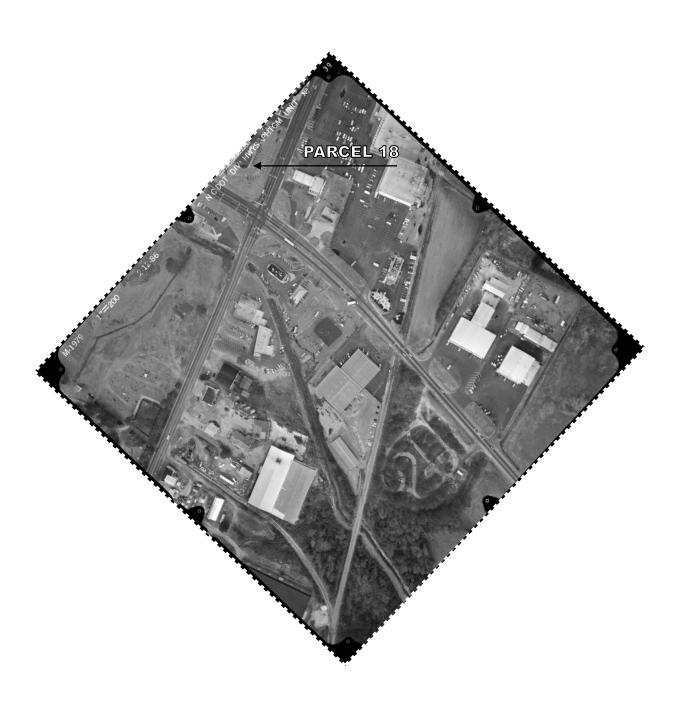

Project No.: G19011.00 Date: September 2019

Source: NCDOT Historical Aerial Imagery Index

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment 1985 Aerial Photograph






Project No.: G19011.00 Date: September 2019

Source: NCDOT Historical Aerial Imagery Index

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment 1976 Aerial Photograph



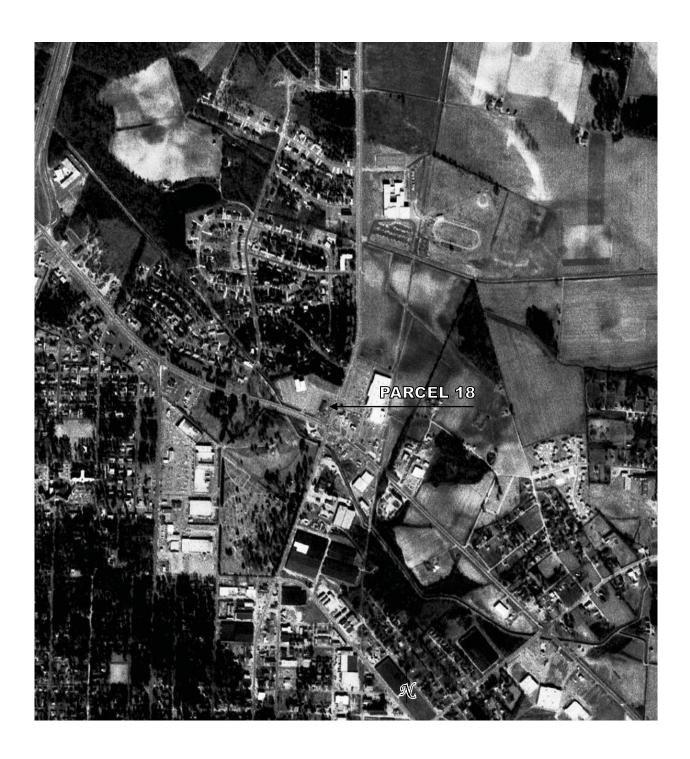

Project No.: G19011.00 Date: September 2019

Source: ERIS Aerial Photographs

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment Site Photographs





Photograph No. 1: General view of Boring B-20.



Photograph No. 2: General view of Boring B-21.

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment Site Photographs





Photograph No. 3: General view of Boring B-22.



Photograph No. 4: General view of Boring B-23.

NCDOT U-5797 (SR 1997 Widening) Parcel 18 Preliminary Site Assessment Site Photographs





Photograph No. 5: General view of Boring B-24.

DIVISION OF ENVIRONMENTAL MANAGEMENT

June 26, 1991

Mr. Sam Everett 1203 East 11th Street Lumberton, NC 28358

SUBJECT: Review of Lab Results

UST Soil Assessment Oscar Baxley Grocery Highway 211 - East

Lumberton, Robeson County

Dear Mr. Everett:

This is to acknowledge receipt of the above mentioned soil assessment dated June 14, 1991.

Based on review of the lab results, no additional soil excavation and removal is required. Should new information become available concerning this matter, we reserve the right to reverse this finding.

Should you have any questions or need clarification, please contact Mrs. Cindy Hegg of this office at (919) 486-1541.

original signed

gional Supervisor

C_H MJN/CH/gc

			<u> </u>								
		Site	Investigation Re	eport F	or Po	ermai	nent (Closure	of U.S	S.T.	
1	ĎR Red	turn Completed For	n To:						Sata	Use Only	.,
Ι.	NKS The	e appropriate DEM R	egional Office according	to the d	county	of the	facility's	location.		Number	у
		E MAP ON REVERS FICE ADDRESS],	SE SIDE OF OWNER'S	COPY ((BLUE)	FOR F	REGION	AL		Receive	
		TIOL ADDITION,							Dale	Heceive	u
					RUCTIO						
	1		se complete and return v	vithin (30)	days fo	lowing	completic		_		
		Ownership of Tank	(S)					//	Location	of Tank(s)	•
10	auline	Balley E	verett		_		CON	Bay	ley (mocei	1
Owner	Name Corporat	ion Individual, Public Micros o	or Other Entry of			Facility		or Compa	iny /		/
Street	obes (060	<i>977-2-</i>			Facility	اہے# Dار	avajlable)	Fact		
County	/	0/ 00	75/1/		1 9	Street	Moddress	orSta#te.	Road/	/	2000
CUI	Mperton	The Ja	_ <u>\$3 8</u>		-	VO	101 V	1 11	lpulseri	TON C	78-SSS
01	9	738-586	Gode S			C. 2	P.		1/1	10 he co	ide ·
Area C	ode	Telephone Nun	nber			Area	Code		Telep	hone Numbe	er
					ntact F	erson	_				
	Sun	Verett		Job Title	ıbuna	/af	OU	nor	Tel	ephone Num	778-5867
			adus Co	12	RAV	<u> 7/Λ</u> -	7 7	1 111/10	m /		187(5)
Closure	Contractor			1Adøress)		4 (T		MIN DO	16/1	<u> </u>	16 6 26 1
Lab_	Mtorg	Laboratie	1 Suc 13	5/6 J	ain	<u> </u>	SIN	er l	UITHIN	(180) 1	IC 28401
	•	Name) V. U.S.T. Informatio		(Address)	V Ev	oovotio	n Cond	lition		3/7 A clos	
Tank	Size in	Tank	Last	Wa	ter in	F	100		Odor or	VI. Addi	itional Information Required
No.	Gallons	Dimensions	Contents	Yes	No No	Yes	No	Visible Soil Yes	Contamination No		
		2.11.01.01.0			,,,		1,10	105	L		everse side of blue copy er's copy) for additional
I	500	4211 17:6	GAS	ľ	V			1	$\mid \nu \mid$		ormation required by
	//0	1601 101 11	<u></u>	-	-	/-	1	/	1		N.C DEM in the
3	5(0	42" 11.6"	6/13		V					writte	en report and sketch.
							 	-	<u> </u>		
										1	
				1				. <u> </u>		· · -	
			, ,	VII. C	Check	List					
			Che	ock the a	ctivities	compl	eted				-
-	Contract las	al fire marshall				<u> </u>	0.000				
		aı ıire marsnalı I Reg⊳nal Office before	abandonment.				ABA	ANDONME	ENT IN PL	ACE	
<u> </u>	Drain & flux	sh piping into tank.					Fill	tank until	material ov	verflows tank	opening;
一片		product and residuals own to tank	from tank			-	Plug	gorcapa	all openings	;. emove vent l	íno
<u></u>	Clean and	inspect tank.					Soli	dinertma	aterial used	- please spe	edify:
ا اد	Remove dr	op tube, fill pipe, gauge	pipe, vapor recovery tani	k connectio	ons,	ŀ				<u> </u>	·
	eap or pluc	pumps and other tan gall lines except the ver	k lixtures. nt and fill lines.					RE	MOVAL		
	Punge tank	of all product & flamma	able vapors.			▎⋰⊑		ate vent h	nole		
4	Backfill the	more large holes in the	tanks.			-		€l tank ∽ose of ta	nk in anom	wad memor	
		Permanently closed:	3/23/9/				Fina	al tank de	estination: _	Floyd	1 Gradens Co
			/ /								
				Certificati	on (Be	ad an	d Sign				
Onti	fy under re	enalty of law that I							nation out	omittad is	thic and all attached
CUIT	nents, and	that based on my	have personally examinguity of those indiv	inteo and iduals in	u ami medie	iainillai telv re	WIUT 11 Hisanoas	ne inform Ne for o	nation Sul biainina ti	omittea in i	this and all attached tion, I believe that the
submi	tted informa	ation is true, accura	ate, and complete.	III			טוטו וטיקט	101 0	-coming b	moma	oon, a bollete that the
			ner's authorized representa	tive	1	Signa	ature				Date Signed
							1	>	<u></u>		1201
	UVVI C	vereff				_	tal	$M \subset$	Juer.	<u>U</u>	5/05/11
GW/U	ST-2	White Copy -	Regional Office	Yellow Co	opy - C	entral O	ffice	Bk	ие Сору - C	Owner	/ /

	Notice of Intent:	UST Permaner	t Closure or	Change-In	-Service	
FOR TANKS IN NC	Return Completed Form The appropriate DEM Region location. [SEE REVERSE SOFFICE ADDRESS].	onal Office according to th	e county of the facility's ' (BLUE) FOR REGION	ial I. D	e Use On Number Received	
Į.	Complete and	return thirty (30) days		nange-in-service).	
Tank Own	I. OWNERSHIP OF TA	ank(s) Wley Everett	II. Facility Name or C	LOCATION O		w/en Grocey
(Corporation, India Street Add	idual, Public Agency, or Other Entry Iress: 1903 EQH	1/4 street	Facility ID # (if ava	nilable)	None	/
, ·	Koberon)ord	Street Address or			
	<u> Иреттом</u> State: <u>ЛС</u> (Area Code): <u>919</u> —732		County: KONON		one	Zip Codeクロンソ
		en relacionation (en relacionate de la light (en la light) de la light (ACT PERSON			
Name:	am Everett	Job Title: 1	usband	Telephone No	umber:610	1,738-5863
	IV. TANK	REMOVAL, CLOSURE	IN PLACE, CHANG	E-IN-SERVICE		
2. Plan 3. Cond 4. If Re Publi	act Local Fire Marshall. the entire closure event. duct Site Soil Assessments. emoving Tanks or Closing in Fications. 2015 "Cleaning Petr	oleum Storage	following the	cations. GW/UST-2 "S Closure" and resite investiga	Site Investiga eturn within (tion Report for
	rs" & 1604 "Removal & Disposerground Petroleum Storage	Tanks".	7. Keep records	s for 3 years.	observatives and a second	
(Contracto	or) Name: <u>710 yd 6</u>		E PERFORMED BY:			
	0 - 0 1 - 1	Sembertor State:	N.C.	Z	Zip Code:	28359
Contact:	Palmy F. Fle	QX	Phone: <u>0 F/</u>			<u>77 </u>
	VI. TANKÆ	SCHEDULED FOR	CLOSURE OR CHA			
TANK ID#	TANK CAPACITY	LAST CONTI	ENTS	CLOS	OPOSED A	CHANGE-IN-SERVICE
	550 	GAS		Removal	Abandonment in Place	New Contents Stored
	VII. OWN	IER OR OWNERS AU	JTHORIZED REPRES	SENTATIVE		
Print Pame a	nd official title Everett-Own	M	*s	cheduled Ren	noval Date:	5/23/41
Signature:	Ham Evere	U	Da	te Submitted:	5/23	3/91
*If scheduled	work date changes, notify your appr	opriate DEM Regional Office	48 hours prior to originally	y scheduled date.		

APPLICATION TO USE, INSTALL, CONDUCT PROCESSES OR CARRY ON OPERATIONS INVOLVING OR CREATING CONDITIONS DEEMED HAZARDOUS TO LIFE OR PROPERTY

		10-14-83
To Chief of Fire Department, City o	f Lumberton, N. C.	Date
Application is hereby made by the ur	ndersigned for a Permit to	Use Install Operate Conduct
in or on the premises known as InCO. the following materials, processes or opera	/ /	VEUILLE ROPOLT ROBERTS Street or Avenue
(Describe briefly what is to be done	e and state what hazardous	materials are to be used.)
FOR THE BEM	OUAL OF 4	- 4000 GALLAN
UNIUKEROUND G	ASOLING STU	SAGE TANKS.
#12-83		
Conditions, surroundings and arrang	ements to be in accordance	with the Fire Prevention Ordinance.
This application is not approved insofar as Zoning and Building Ordinances are oncerned.		C. 21. Name of Applicant
Inspector of Buildings		P.O. Boy 1887 Sumberton 20 C Address of Applicant

Complete plans and construction details must be filed on all major projects and when requested by the chief of the fire department.







Hydrocarbon Analysis Results

Client: FALCON Samples taken Tuesday, April 9, 2019

Address: 1210 TRINITY ROAD SUITE 116 Samples extracted Tuesday, April 9, 2019
CARY NC 28513 Samples analysed Tuesday, April 16, 2019

Contact: CHRISTOPHER BURKHARDY DAVIS MARTINEC

Project: G19011 U5797

													U00902
Matrix	Sample ID	Dilution used	BTEX (C6 - C9)	GRO (C5 - C10)	DRO (C10 - C35)	TPH (C5 - C35)	Total Aromatics (C10-C35)	16 EPA PAHs	ВаР	Ç	% Ratios	i	HC Fingerprint Match
										C5 - C10	C10 - C18	C18	
s	B20	22.6	<0.57	<0.57	12.7	12.7	6.4	0.32	<0.023	0	76.5	23.5	V.Deg.PHC 96.9%,(FCM)
s	B21	10.9	<0.27	<0.27	1.2	1.2	0.55	<0.09	<0.011	0	78.8	21.2	Deg.PHC 80.6%,(FCM)
s	B22	11.4	<0.28	<0.28	<0.28	0.18	0.18	<0.09	<0.011	0	61.6	38.4	Residual HC,(BO)
s	B23	10.9	<0.27	<0.27	<0.27	<0.27	<0.05	<0.09	<0.011	0	0	0	,(FCM)
S	B24	7.4	<0.18	<0.18	<0.18	<0.18	<0.04	<0.06	<0.007	0	0	0	,(FCM),(BO)
	Initial C	Calibrator	QC check	OK					Final FC	CM QC	Check	OK	

Concentration values in mg/kg for soil samples and mg/L for water samples. Soil values uncorrected for moisture or stone content. Fingerprints provide a tentative hydrocarbon identification.


Abbreviations :- FCM = Results calculated using Fundamental Calibration Mode : % = confidence of hydrocarbon identification : (PFM) = Poor Fingerprint Match : (T) = Turbid : (P) = Particulate detected


B = Blank Drift: (SBS)/(LBS) = Site Specific or Library Background Subtraction applied to result: (BO) = Background Organics detected: (OCR) = Outside cal range: (M) = Modifed Result.


% Ratios estimated aromatic carbon number proportions : HC = Hydrocarbon : PHC = Petroleum HC : FP = Fingerprint only.


Data generated by HC-1 Analyser


Project: G19011 U5797

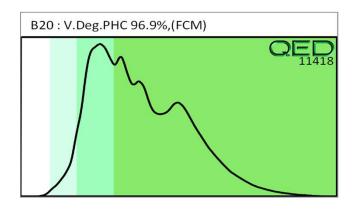

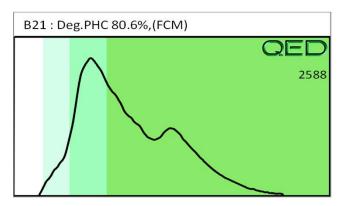

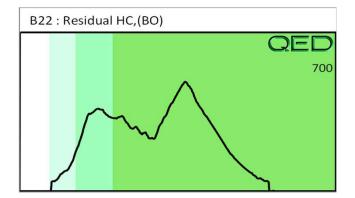

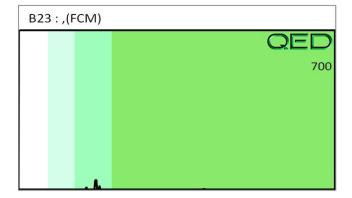

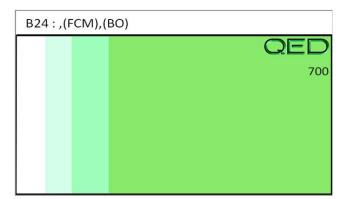



PYRAMID GEOPHYSICAL SERVICES (PROJECT 2019-091)

GEOPHYSICAL SURVEY

METALLIC UST INVESTIGATION: PARCEL 18 **NCDOT PROJECT U-5797**

HIGHWAY 211 EAST, LUMBERTON, NC **APRIL 22, 2019**

Report prepared for: Christopher J. Burkhardt, PWS

> **Falcon Engineers** 1210 Trinity Rd. #110 Raleigh, NC 27607

Prepared by: Eric C. Cross, P.G.

NC License #2181

Reviewed by: _

Douglas A. Canavello, P.G. NC License #1066

GEOPHYSICAL INVESTIGATION REPORT

Parcel 18 - Highway 211 East Lumberton, Robeson County, North Carolina

Table of Contents

Executive Summary	1
Introduction	
Field Methodology	
Discussion of Results	
Discussion of EM Results	
Discussion of GPR Results	
Summary & Conclusions	
Limitations	

Figures

- Figure 1 Parcel 18 Geophysical Survey Boundaries and Site Photographs
- Figure 2 Parcel 18 EM61 Results Contour Map
- Figure 3 Parcel 18 GPR Transect Locations and Images
- Figure 4 Parcel 18 Overlay of Metal Detection Results on NCDOT Engineering Plans

LIST OF ACRONYMS

CADD	Computer Assisted Drafting and Design
DF	Dual Frequency
EM	Electromagnetic
GPR	Ground Penetrating Radar
GPS	Global Positioning System
NCDOT	North Carolina Department of Transportation
ROW	
UST	Underground Storage Tank

EXECUTIVE SUMMARY

Project Description: Pyramid Environmental conducted a geophysical investigation for Falcon Engineers at Parcel 18, located on Highway 211 East in Lumberton, NC. The survey was part of an NCDOT Right-of-Way (ROW) investigation (NCDOT Project U-5797). The survey was designed to extend from the existing edge of pavement into the proposed ROW and/or easements, whichever distance was greater. Conducted from March 18-26, 2019, the geophysical investigation was performed to determine if unknown, metallic underground storage tanks (USTs) were present beneath the survey area.

Geophysical Results: The geophysical investigation consisted of electromagnetic (EM) induction-metal detection and ground penetrating radar (GPR) surveys. A total of eleven EM anomalies were identified. The majority of the EM anomalies were directly attributed to visible cultural features at the ground surface. Several EM anomalies were associated with suspected utilities and interference from vehicles and were further investigated with GPR.

GPR recorded small, low-amplitude anomalies, consistent with suspected utilities. GPR also recorded minor reflectors that were suggestive of possible buried metallic debris. No evidence of any larger structures such as USTs was observed. Collectively, the geophysical data did not record any evidence of unknown metallic USTs within the geophysical survey area at Parcel 18.

INTRODUCTION

Pyramid Environmental conducted a geophysical investigation for Falcon Engineers at Parcel 18, located on Highway 211 East in Lumberton, NC. The survey was part of an NCDOT Right-of-Way (ROW) investigation (NCDOT Project U-5797). The survey was designed to extend from the existing edge of pavement into the proposed ROW and/or easements, whichever distance was greater. Conducted from March 18-26, 2019, the geophysical investigation was performed to determine if unknown, metallic underground storage tanks (USTs) were present beneath the survey area.

The site included a commercial building surrounded by concrete, asphalt, and grass surfaces. An aerial photograph showing the survey area boundaries and ground-level photographs are shown in **Figure 1**.

FIELD METHODOLOGY

The geophysical investigation consisted of electromagnetic (EM) induction-metal detection and ground penetrating radar (GPR) surveys. Pyramid collected the EM data using a Geonics EM61-MK2 (EM61) metal detector integrated with a Geode External GPS/GLONASS receiver. The integrated GPS system allows the location of the instrument to be recorded in real-time during data collection, resulting in an EM data set that is georeferenced and can be overlain on aerial photographs and CADD drawings. A boundary grid was established around the perimeter of the site with marks every 10 feet to maintain orientation of the instrument throughout the survey and assure complete coverage of the area.

According to the instrument specifications, the EM61 can detect a metal drum down to a maximum depth of approximately 8 feet. Smaller objects (1-foot or less in size) can be detected to a maximum depth of 4 to 5 feet. The EM61 data were digitally collected at approximately 0.8-foot intervals along north-south trending or east-west trending, generally parallel survey lines, spaced five feet apart. The data were downloaded to a

computer and reviewed in the field and office using the Geonics NAV61 and Surfer for Windows Version 15.0 software programs.

GPR data were acquired across select EM anomalies on March 26, 2019, using a Geophysical Survey Systems, Inc. (GSSI) UtilityScan DF unit equipped with a dual frequency 300/800 MHz antenna. Data were collected both in reconnaissance fashion as well as along formal transect lines across EM features. The GPR data were viewed in real-time using a vertical scan of 512 samples, at a rate of 48 scans per second. GPR data were viewed down to a maximum depth of approximately 6 feet, based on dielectric constants calculated by the DF unit in the field during the reconnaissance scans. GPR transects across specific anomalies were saved to the hard drive of the DF unit for post-processing and figure generation.

Pyramid's classifications of USTs for the purposes of this report are based directly on the geophysical UST ratings provided by the NCDOT. These ratings are as follows:

	Geophysical Surveys for on NCI	Underground Stora OOT Projects	ge Tanks
High Confidence	Intermediate Confidence	Low Confidence	No Confidence
Known UST	Probable UST	Possible UST	Anomaly noted but not
Active tank - spatial location, orientation,	Sufficient geophysical data from both magnetic and radar surveys that is	Sufficient geophysical data from either magnetic or radar surveys	characteristic of a UST. Should be noted in the text and may be called
and approximate	characteristic of a tank. Interpretation may	that is characteristic of a tank.	out in the figures at the
depth determined by	be supported by physical evidence such as	Additional data is not sufficient	geophysicist's discretion.
geophysics.	fill/vent pipe, metal cover plate,	enough to confirm or deny the	g. P.
T (T)(T)	asphalt/concrete patch, etc.	presence of a UST.	

DISCUSSION OF RESULTS

Discussion of EM Results

A contour plot of the EM61 results obtained across the survey area at the property is presented in **Figure 2**. Each EM anomaly is numbered for reference in the figure. The following table presents the list of EM anomalies and the cause of the metallic response, if known:

LIST OF METALLIC ANOMALIES IDENTIFIED BY EM SURVEY

Metallic Anomaly #	Cause of Anomaly	Investigated with GPR
1	Sign	
2	Light	
3	Utility	Ø
4	Hydrant/Sign/Utilities	Ø
5	Utilities	Ø
6	Vehicles	Ø
7	Guy Wires	
8	Sign	
9	Drop Inlets	
10	Sign/Guy Wires/Utilities	
11	Metal Plate	

The majority of the EM anomalies were directly attributed to visible cultural features at the ground surface, including signs, a light, utilities, a hydrant, vehicles, guy wires, drop inlets, and a metal plate. EM Anomalies 3, 4, and 5 were associated with suspected utilities and were further investigated with GPR.

EM Anomaly 6 was associated with interference from vehicles and was further investigated with GPR to verify that the interference did not obscure buried structures such as USTs.

Discussion of GPR Results

Figure 3 presents the locations of the formal GPR transects performed at the property as well as the transect images. A total of six formal GPR transects were performed at the site. GPR Transects 1-3 were performed across the areas of interference from the vehicles (EM Anomaly 6). These transects recorded no evidence of buried structures, such as USTs.

GPR Transects 4-6 were performed across areas of suspected utilities (EM Anomalies 3, 4, and 5). GPR Transects 4 and 6 recorded small, low-amplitude anomalies, consistent with suspected utilities. GPR Transect 5 recorded minor reflectors that were suggestive of possible buried metallic debris. No evidence of any larger structures such as USTs was observed.

Collectively, the geophysical data <u>did not record any evidence of unknown metallic USTs</u> <u>within the geophysical survey area at Parcel 18</u>. **Figure 4** provides an overlay of the EM61 metal detection contour map onto the NCDOT MicroStation engineering plans for reference.

SUMMARY & CONCLUSIONS

Pyramid's evaluation of the EM61 and GPR data collected at Parcel 18 in Lumberton, North Carolina, provides the following summary and conclusions:

- The EM61 and GPR surveys provided reliable results for the detection of metallic USTs within the accessible portions of the geophysical survey area.
- The majority of the EM anomalies were directly attributed to visible cultural features at the ground surface.
- Several EM anomalies were associated with suspected utilities and interference from vehicles and were further investigated with GPR.
- GPR recorded small, low-amplitude anomalies, consistent with suspected utilities.
 GPR also recorded minor reflectors that were suggestive of possible buried metallic debris. No evidence of any larger structures such as USTs was observed.
- Collectively, the geophysical data <u>did not record any evidence of unknown metallic</u>

 <u>USTs within the geophysical survey area at Parcel 18.</u>

LIMITATIONS

Geophysical surveys have been performed and this report was prepared for Falcon Engineers in accordance with generally accepted guidelines for EM61 and GPR surveys. It is generally recognized that the results of the EM61 and GPR surveys are non-unique and may not represent actual subsurface conditions. The EM61 and GPR results obtained for this project have not conclusively determined the definitive presence or absence of metallic USTs, but the evidence collected is sufficient to result in the conclusions made in this report. Additionally, it should be understood that areas containing extensive

vegetation, reinforced concrete, or other restrictions to the accessibility of the geophysical instruments could not be fully investigated.						

APPROXIMATE BOUNDARIES OF GEOPHYSICAL SURVEY AREA





View of Survey Area (Facing Approximately East)



View of Survey Area (Facing Approximately South)



503 INDUSTRIAL AVENUE GREENSBORO, NC 27406 (336) 335-3174 (p) (336) 691-0648 (f) License # C1251 Eng. / License # C257 Geology

PROJECT

PARCEL 18 LUMBERTON, NORTH CAROLINA NCDOT PROJECT U-5797

TITLE

PARCEL 18 - GEOPHYSICAL SURVEY BOUNDARIES AND SITE PHOTOGRAPHS

DATE	3/26/2019	CLIENT FALCON ENGINEER
PYRAMID PROJECT #:	2019-091	FIGURE 1


EM61 METAL DETECTION RESULTS



NO EVIDENCE OF METALLIC USTs OBSERVED.

The contour plot shows the differential results of the EM61 instrument in millivolts (mV). The differential results focus on larger metallic objects such as USTs and drums. The EM data were collected on March 18, 2019, using a Geonics EM61-MK2 instrument. Verification GPR data were collected using a GSSI UtilityScan DF instrument with a dual frequency 300/800 MHz antenna on March 26, 2019.

EM61 Metal Detection Response (millivolts)





503 INDUSTRIAL AVENUE GREENSBORO, NC 27406 (336) 335-3174 (p) (336) 691-0648 (f)

License # C1251 Eng. / License # C257 Geology

PROJECT

PARCEL 18 LUMBERTON, NORTH CAROLINA NCDOT PROJECT U-5797


TITLE

PARCEL 18 -EM61 METAL DETECTION CONTOUR MAP


DATE	3/26/2019	CLIENT FALCON ENGINEE
PYRAMID PROJECT #:	2019-091	FIGURE 2


LOCATIONS OF GPR TRANSECTS




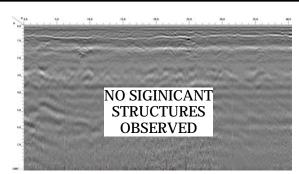

GPR TRANSECT 1 (T1)









GPR TRANSECT 2 (T2)

GPR TRANSECT 3 (T3)

GPR TRANSECT 4 (T4)





GPR TRANSECT 5 (T5)

GPR TRANSECT 6 (T6)





503 INDUSTRIAL AVENUE GREENSBORO, NC 27406 (336) 335-3174 (p) (336) 691-0648 (f) License # C1251 Eng. / License # C257 Geology PROJECT

PARCEL 18 LUMBERTON, NORTH CAROLINA NCDOT PROJECT U-5797 TITLE

PARCEL 18 -GPR TRANSECT LOCATIONS AND IMAGES

DATE	3/26/2019	CLIENT	FA
PYRAMID PROJECT #:	2019-091		I

FALCON ENGINEERS
FIGURE 3

