

3/6/2025
R:\Traffic\TrafficControl\Sign\U5797_Sign_PSHol_TSH.dgn
MurphyWD

PROJECT: U-5797

CONTRACT: C205036

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

STATE PROJECT REFERENCE NO.	SHEET NO.
U-5797	SIGN-1

SIGNING PLAN

ROBESON COUNTY

LOCATION: SR 1997 (FAYETTEVILLE RD.) FROM FARRINGDOM STREET TO EAST OF 22ND STREET.

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE	STD. NO.	TITLE
901.10	TYPE 'A' SIGNS	904.50	MOUNTING OF TYPE 'D', 'E', AND 'F' SIGNS ON 'U' CHANNEL POSTS
901.50	ARROWS AND SHIELDS	910.30	SIGNING UNSIGNALIZED SUPERSTREET
901.80	SIGN MOUNTING DETAILS - TYPE 'A' AND 'B' SIGNS	910.40	SINGLE LANE ROUNDABOUT SIGNING, W/ PEDESTRIANS
904.10	ORIENTATION OF GROUND MOUNTED SIGNS		

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3-LB STEEL U-CHANNEL	1710	LF
4130000000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE @ -L- STA 41+60+/-	1	LS
4130000000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE @ -L- STA 49+20+/-	1	LS
4130000000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE @ -L- STA 60+05+/-	1	LS
4096000000	904	SIGN ERECTION, TYPE D	4	EA
4102000000	904	SIGN ERECTION, TYPE E	84	EA
4108000000	904	SIGN ERECTION, TYPE F	10	EA
4109000000	904	SIGN ERECTION, TYPE A (OVERHEAD)	5	EA
4116100000	904	SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED)	10	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	62	EA
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	10	EA

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.



SIGNING:

- SIGNS FURNISHED BY STATE
- ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POST UNLESS OTHERWISE INDICATED ON THE PLANS.
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTING SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- THE BACKGROUND FOR TYPE 'E' AND 'F' SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- DO NOT BEGIN FABRICATION FOR TYPES A & B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL 'S' DIMENSIONS HAVE BEEN FIELD VERIFIED.

INDEX OF SHEETS












SHEET NO.	TITLE
SIGN-1	SIGNING PLAN COVER SHEET
SIGN-2A THRU 2C	SUMMARY OF SIGNAGE QUANTITIES
SIGN-3A THRU SIGN-3C	SIGN DESIGNS
SIGN-3D THRU SIGN-3F	OVERHEAD SIGN ASSEMBLY
SIGN-4 THRU SIGN-11	SIGNING DETAIL SHEETS

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

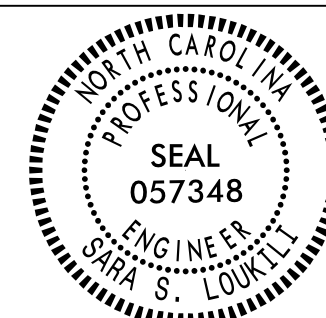APPROVED:  DATE: 3/6/2025	PLAN PREPARED FOR N.C.D.O.T. BY: STV ENGINEERS, INC.
	PATRICK A. LIVINGSTON, PE PROJECT ENGINEER WESTON D. MURPHY, PE DESIGN ENGINEER E. NEAL PASCHAL, PE DESIGN TECHNICIAN

8/17/99

3/6/2025
C:\TrafficControl\SIGN\U5797_SIGN_PSH02A.dgn
Microsoft Word

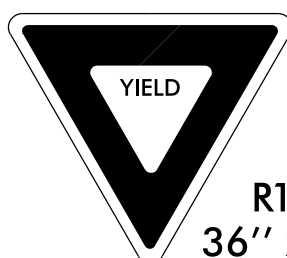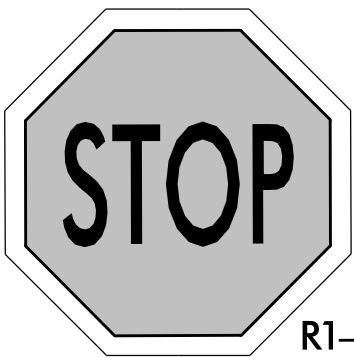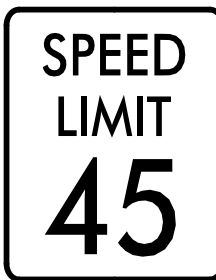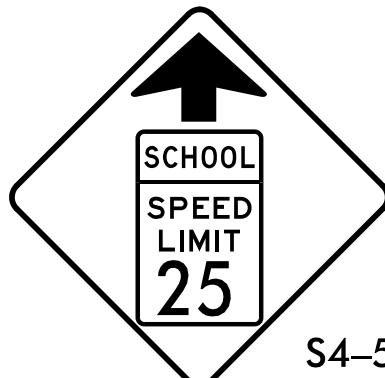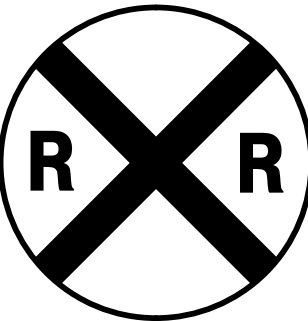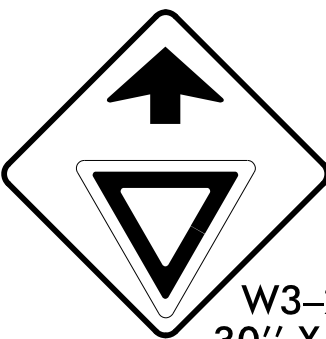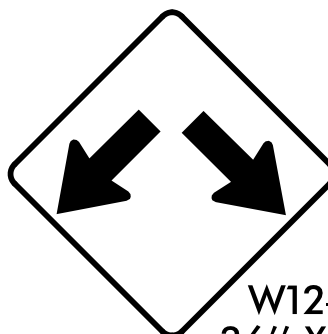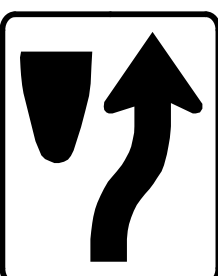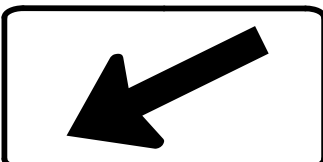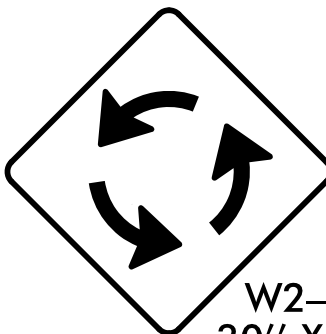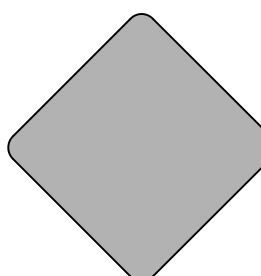401 QUANTITY REQ'D = 5  R1-2 36'' x 36'' x 36''	405 QUANTITY REQ'D = 14  R1-1 30'' X 30''	409 QUANTITY REQ'D = 4  R2-1 30'' X 36''		417 QUANTITY REQ'D = 1  S4-5 36'' x 36''	STV STV Engineers, Inc. 2121 RDU Center Dr. Suite 210 Morrisville, NC 27560 NC License Number F-0991 421 QUANTITY REQ'D = 3 SCHOOL S4-3P 24'' X 8''	425 QUANTITY REQ'D = 2  W10-1 36'' DIA.								
402 QUANTITY REQ'D = 4  W3-2A 30'' X 30''	406 QUANTITY REQ'D = 1  W12-1 36'' X 36''	410 QUANTITY REQ'D = 17  R4-7 24'' X 30''	414 QUANTITY REQ'D = 2 RIGHT LANE MUST TURN RIGHT R3-7 R 36'' X 36''	418 QUANTITY REQ'D = 2 REDUCED SPEED AHEAD R2-5A 18'' X 24''	422 QUANTITY REQ'D = 2 SPEED LIMIT 25 R2-1 24'' X 30'' MOUNT BELOW SIGN 421 IN 2 INSTALLMENTS	426 QUANTITY REQ'D = 3  W16-7p 24'' X 12'' MOUNT BELOW SIGN 419 IN 3 INSTALLMENTS								
403 QUANTITY REQ'D = 4  W2-6 30'' X 30''	407 QUANTITY REQ'D = 1 SPEED LIMIT 25 R2-1 24'' X 30''	411 QUANTITY REQ'D = 4 25 M.P.H. W13-1 18'' X 18'' MOUNT BELOW SIGN 403 IN 4 INSTALLMENTS	415 QUANTITY REQ'D = 2 LEFT LANE MUST TURN LEFT R3-7 L 30'' X 30''	419 QUANTITY REQ'D = 3  W11-2 36'' X 36''	423 QUANTITY REQ'D = 2 END SCHOOL ZONE S5-2 24'' X 30''	427 QUANTITY REQ'D = 1 AHEAD S1-1 24'' X 12'' MOUNT BELOW SIGN 420 IN 1 INSTALLMENT								
404 QUANTITY REQ'D = 4  R6-4 30'' X 24''	408 QUANTITY REQ'D = 8 SPEED LIMIT 35 R2-1 24'' X 30''	412 QUANTITY REQ'D = 17  OM1-3 18'' X 18'' MOUNT BELOW SIGN 410 IN 17 INSTALLMENTS	416 QUANTITY REQ'D = 1 BEGIN LEFT TURN LANE R3-20 L 24'' X 36''	420 QUANTITY REQ'D = 1  S1-1 36'' X 36''	424 QUANTITY REQ'D = 1  W4-1L 36'' X 36''	DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED APPROVED: Sara Loukili DATE: 3/6/2025 SEAL NORTH CAROLINA PROFESSIONAL ENGINEER SARA S. LOUKILI 057348 SCALE: NONE DATE: 3/21/19 DWG. BY: ENP DESIGN BY: ENP REVIEWED BY: PAL STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION REVISIONS <table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table> CADD FILE								

8/17/99

428

QUANTITY REQ'D = 1




R2-1
24" X 30"

MOUNT BELOW SIGN
421 IN 1 INSTALLMENT

429

QUANTITY REQ'D = 2



S4-1P
24" X 10"

MOUNT BELOW SIGN
421 IN 2 INSTALLMENTS

430

QUANTITY REQ'D = 2



S4-6P
24" X 10"

MOUNT BELOW SIGN
421 IN 2 INSTALLMENTS

431

QUANTITY REQ'D = 2



R2-1
24" X 30"

MOUNT BELOW SIGN
423 IN 2 INSTALLMENTS



STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.

U-5797


SHEET NO.

SIGN-2B

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED


APPROVED: Sara Loukili DATE: 3/6/2025

SEAL

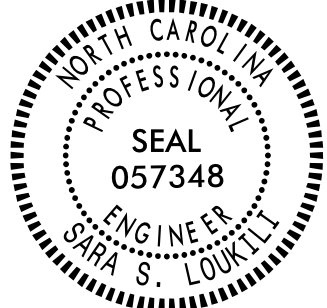

TYPE E SIGNS

SCALE: NONE
3/21/19
DWG. BY: ENP
DESIGN BY: ENP
REVIEWED BY: PAL




REVISIONS

CADD
FILE

8/17/99


501

QUANTITY REQ'D = 1

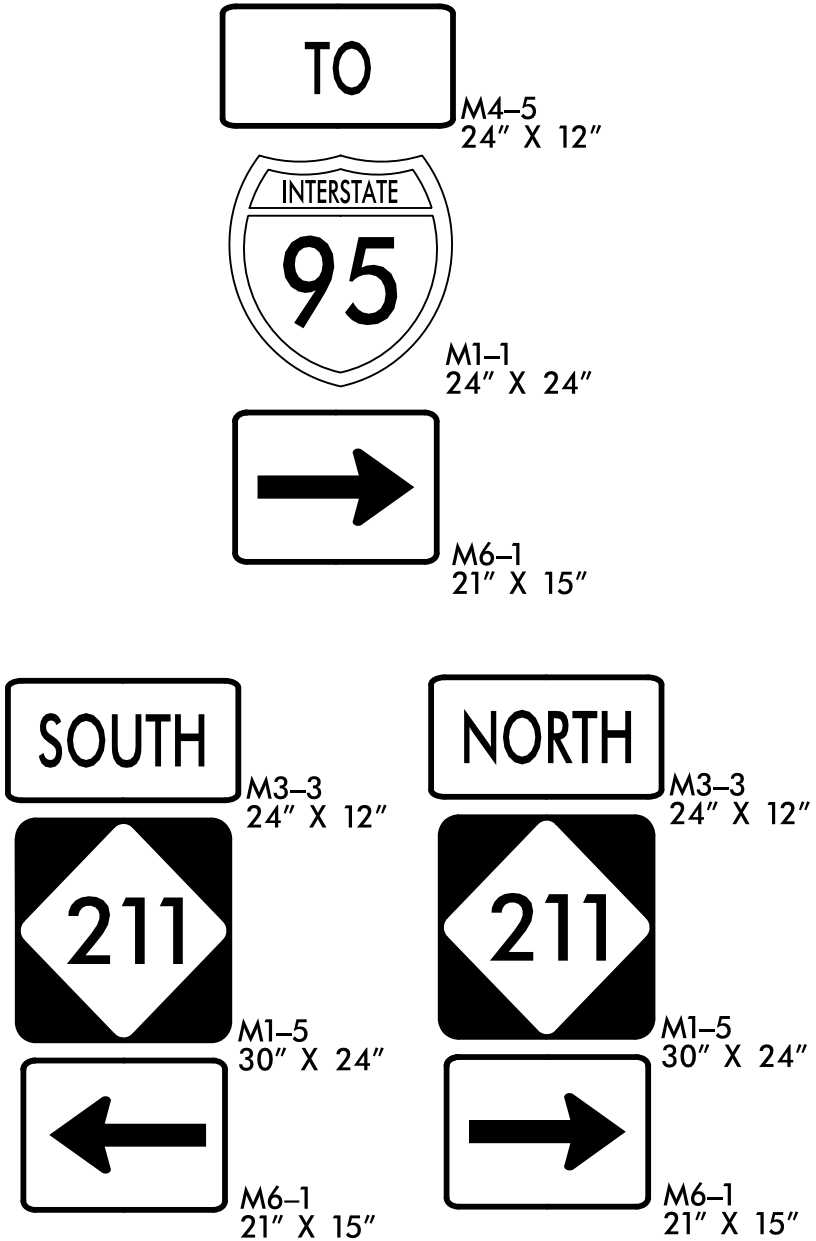


503

QUANTITY REQ'D = 1

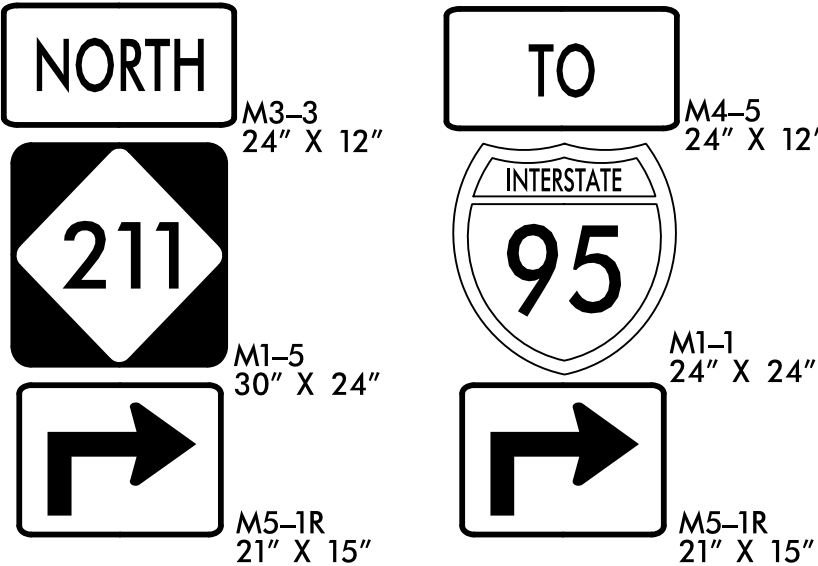


509

QUANTITY REQ'D = 1

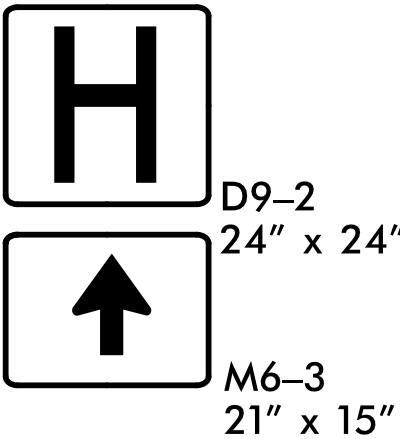


504

QUANTITY REQ'D = 1

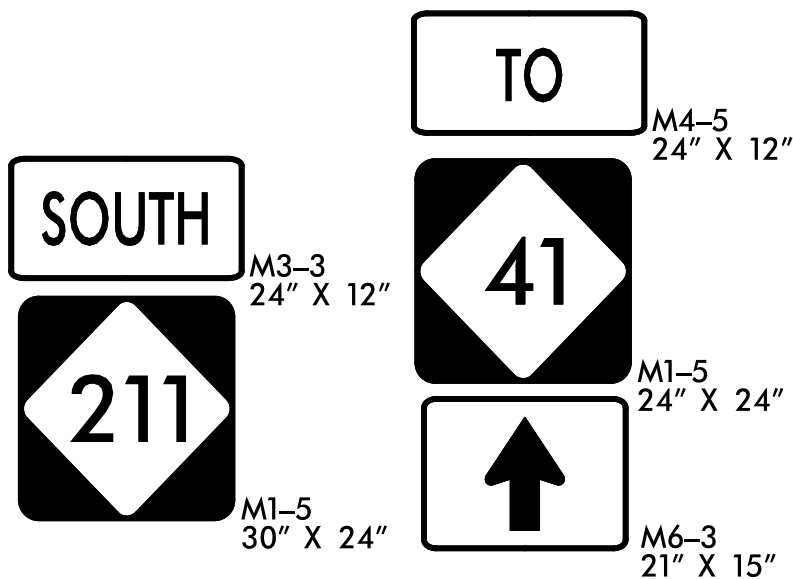


510

QUANTITY REQ'D = 1

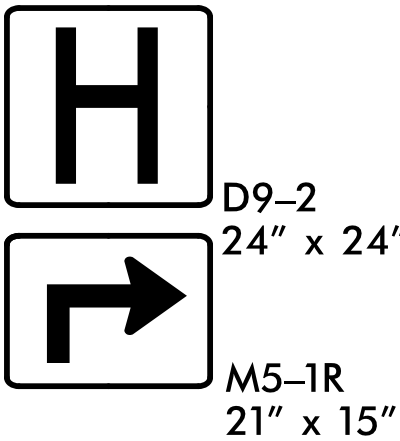


502

QUANTITY REQ'D = 1

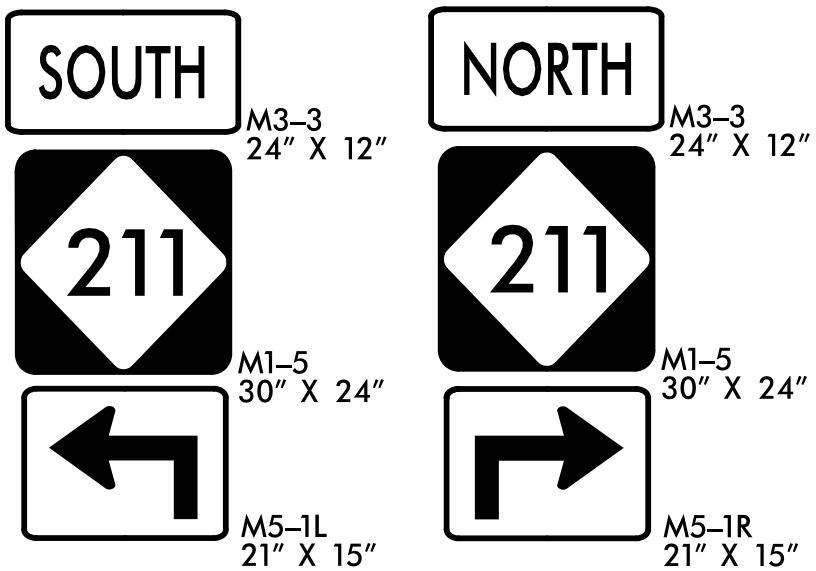


505

QUANTITY REQ'D = 1

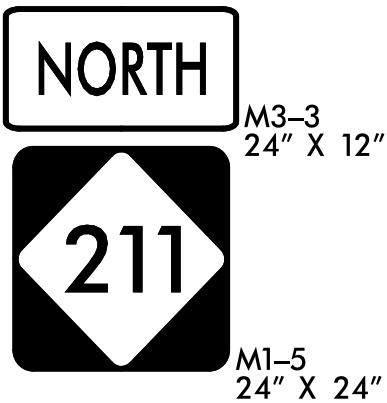


QUANTITY REQ'D = 4

507

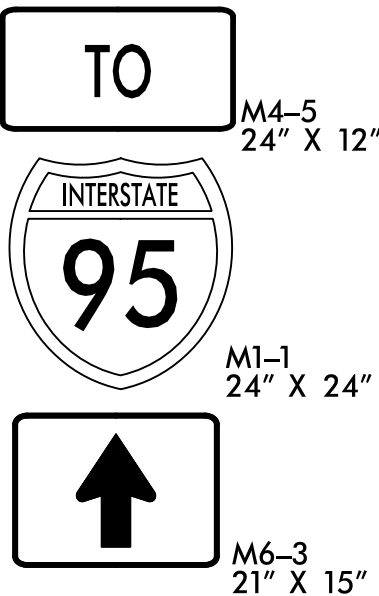


506

QUANTITY REQ'D = 1

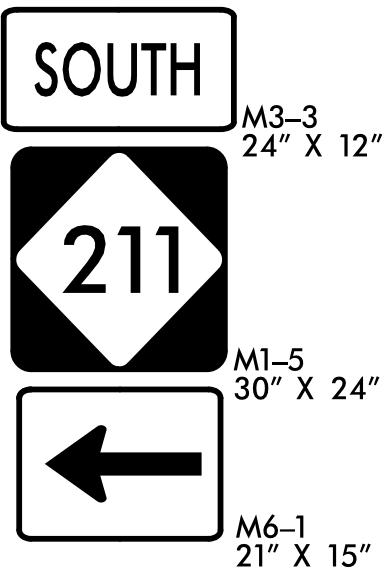

508

QUANTITY REQ'D = 1

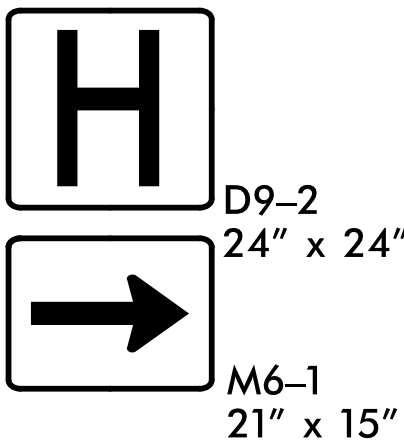

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.

U-5797

SHEET NO.

SIGN-2B


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loulli DATE: 3/6/2025



TYPE F SIGNS

SCALE: NONE
DATE: 3/20/19
DWG. BY: ENP
DESIGN BY: ENP
REVIEWED BY: PAL



REVISIONS

CADD
FILE



STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-099

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-3C

[illegible]

SIGN NUMBER: 302 TYPE: D QUANTITY: 1 SIGN WIDTH: 84" HEIGHT: 42" TOTAL AREA: 24.5 Sq.Ft. BORDER TYPE: FLUSH RECESS: 0" WIDTH: 0.75" RADIUS: 3" NO. Z BARS: LENGTH:	BACKG COLOR: Green COPY COLOR: White <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SYMBOL</th> <th>X</th> <th>Y</th> <th>WID</th> <th>HT</th> </tr> </thead> <tbody> <tr> <td>AR_Type D</td> <td>8.3</td> <td>30.2</td> <td>6</td> <td>9.1</td> </tr> <tr> <td>AR_FISHOOK</td> <td>6.3</td> <td>16.5</td> <td>9</td> <td>9.9</td> </tr> <tr> <td>AR_Type D</td> <td>68.7</td> <td>4.2</td> <td>6.1</td> <td>9</td> </tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	SYMBOL	X	Y	WID	HT	AR_Type D	8.3	30.2	6	9.1	AR_FISHOOK	6.3	16.5	9	9.9	AR_Type D	68.7	4.2	6.1	9																					DESIGN BY: JCT PROJECT ID: U-5797 CHECKED BY: PAL DIV: 6 DATE: Mar 21, 2019
SYMBOL	X	Y	WID	HT																																						
AR_Type D	8.3	30.2	6	9.1																																						
AR_FISHOOK	6.3	16.5	9	9.9																																						
AR_Type D	68.7	4.2	6.1	9																																						



USE NOTES: 1,2

- Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
- Background shall be Grade C reflective sheeting.

BORDER
R = 3"
TH = 0.75"

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: 103	BACKG COLOR: Green	DESIGN BY: JCT	CHECKED BY: PAL
TYPE: D	COPY COLOR: White	PROJECT ID: U-5797	DIV: 6
QUANTITY: 1			DATE: Mar 21, 2019

SYMBOL	X	Y	WID	HT
AR_Type D	8.3	30.2	6	9.1
AR_FISHHOOK	6.3	16.5	9	9.9
AR_Type D	68.7	4.2	6.1	9

TOTAL AREA: 24.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 3"

NO. Z BARS:
LENGTH:

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1,2
 1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
 2. Background shall be Grade C reflective sheeting.


BORDER
R = 3"
TH = 0.75"

Spacing Factor is 1 unless specified otherwise

[illegible]

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

Signed by: <u>Sara Loueli</u> APPROVED: <u>Sara Loueli</u> DATE: <u>6/25/2025</u> 9054399999999999		SIGN DESIGNS TYPE D									
SEAL 		SCALE: NONE DATE: 3/21/19 DWG. BY: ENP DESIGN BY: ENP REVIEWED BY: PAL	 <table border="1"> <thead> <tr> <th colspan="2">REVISIONS</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS							
REVISIONS											
		CADD FILE									

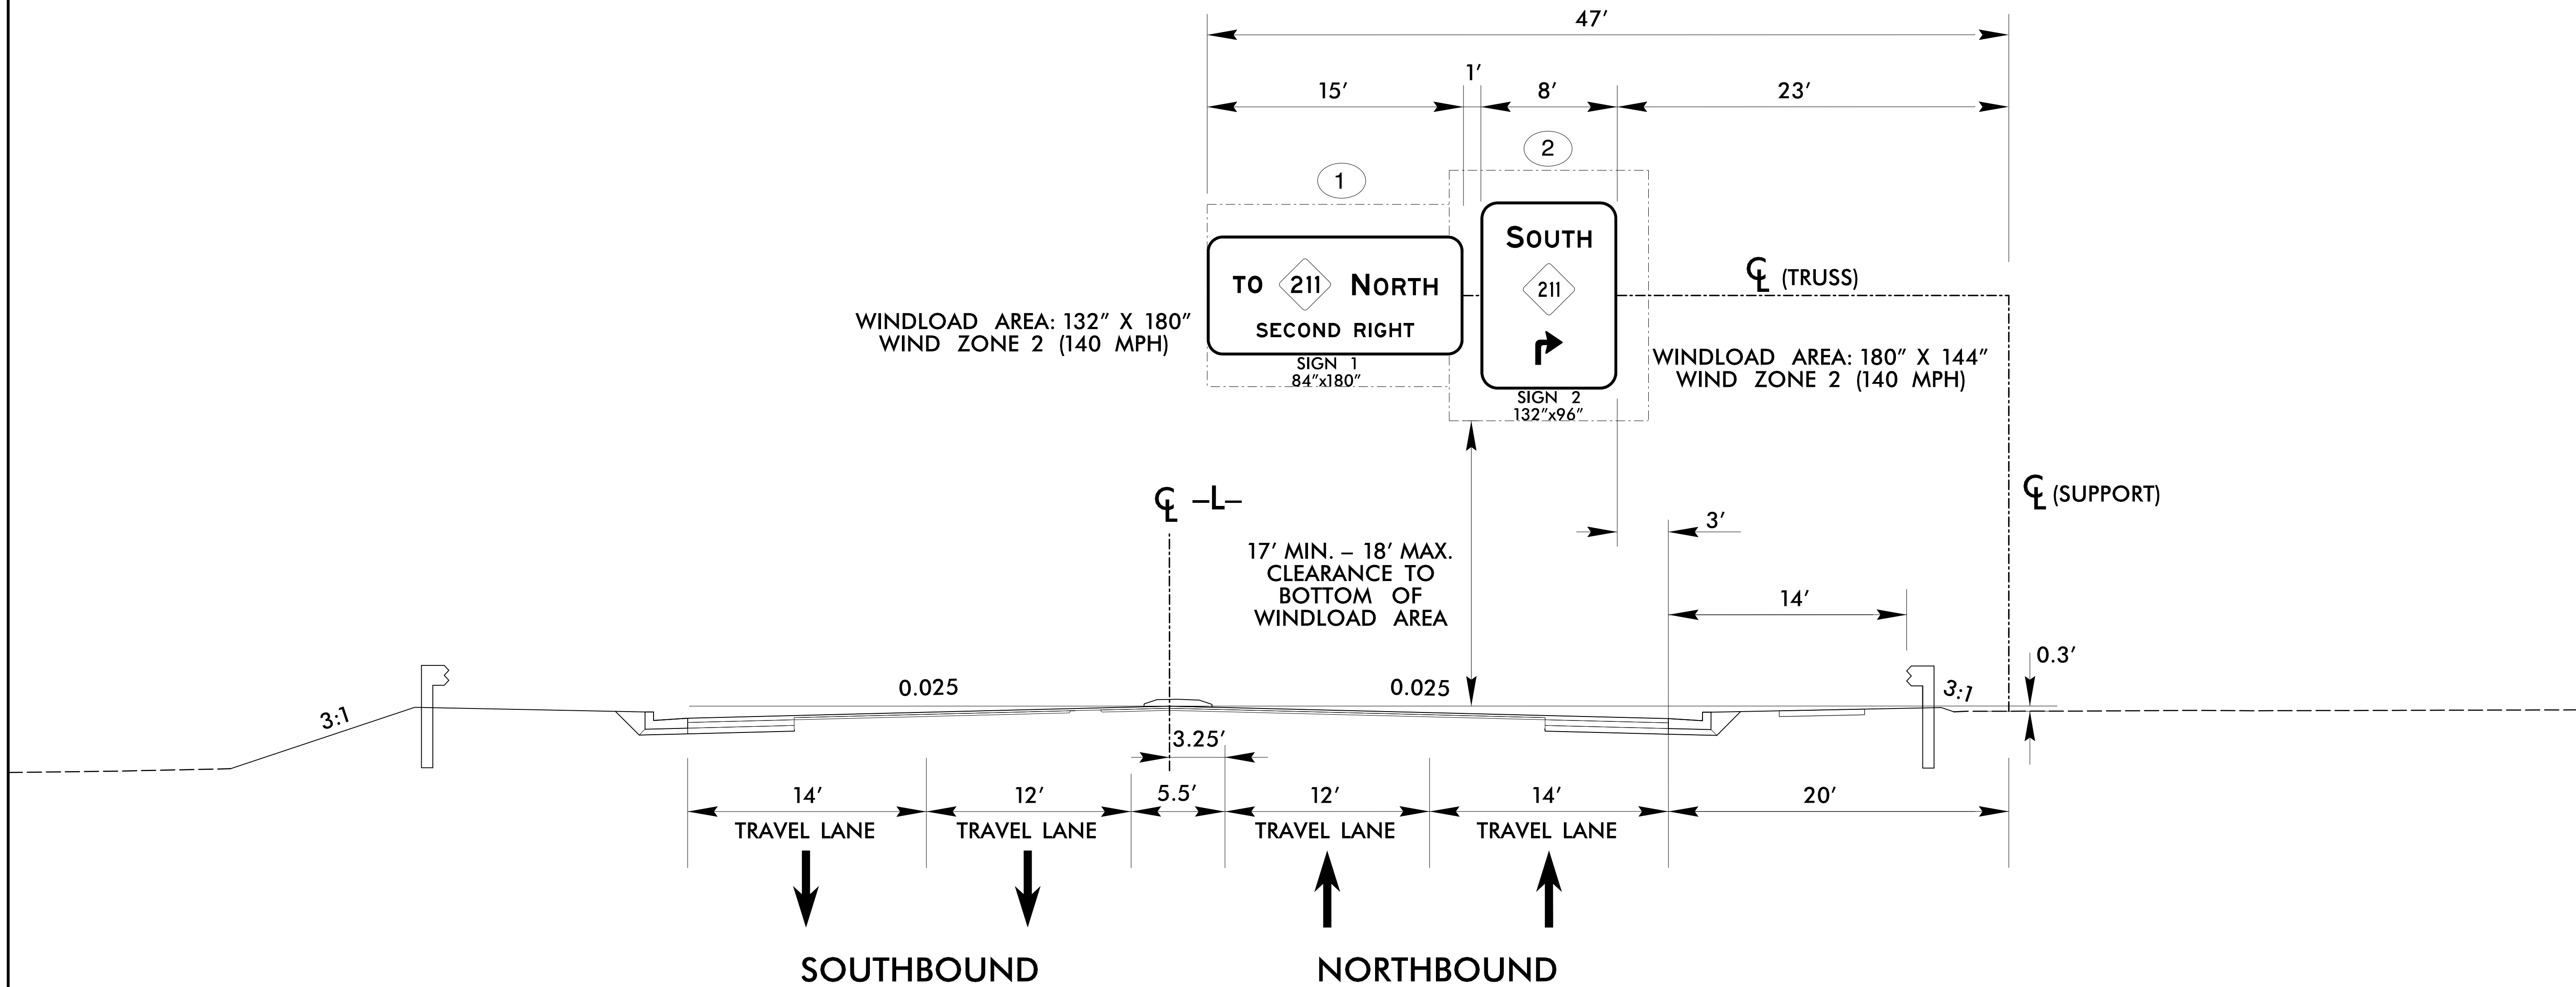


1. IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.

2. MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
3. FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
4. THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
5. SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
6. DESIGN AND CONSTRUCTION REQUIREMENTS FOR THE SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 140 MPH.

STRUCTURE INVENTORY NUMBER – 770584

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**


Signed by: _____ APPROVED: <u>Sara Loukli</u> DATE: <u>3/6/2025</u> CADD 3/6/2025 09:51:05	OVERHEAD SIGN ASSEMBLY "A" -L- STA 41+60+/-																						
 SEAL 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">SCALE: NONE</td> <td style="width: 50%;"></td> </tr> <tr> <td>DATE: 06/08/20</td> <td></td> </tr> <tr> <td>DWG. BY: ENP</td> <td></td> </tr> <tr> <td>DESIGN BY: ENP</td> <td></td> </tr> <tr> <td>REVIEWED BY: PAL</td> <td></td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <th colspan="2" style="text-align: center;">REVISIONS</th> </tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr> <td style="text-align: center; font-size: small;">CADD FILE</td> <td> </td> </tr> </table>	SCALE: NONE		DATE: 06/08/20		DWG. BY: ENP		DESIGN BY: ENP		REVIEWED BY: PAL		REVISIONS										CADD FILE	
SCALE: NONE																							
DATE: 06/08/20																							
DWG. BY: ENP																							
DESIGN BY: ENP																							
REVIEWED BY: PAL																							
REVISIONS																							
CADD FILE																							

8/17/99

stv

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-3E

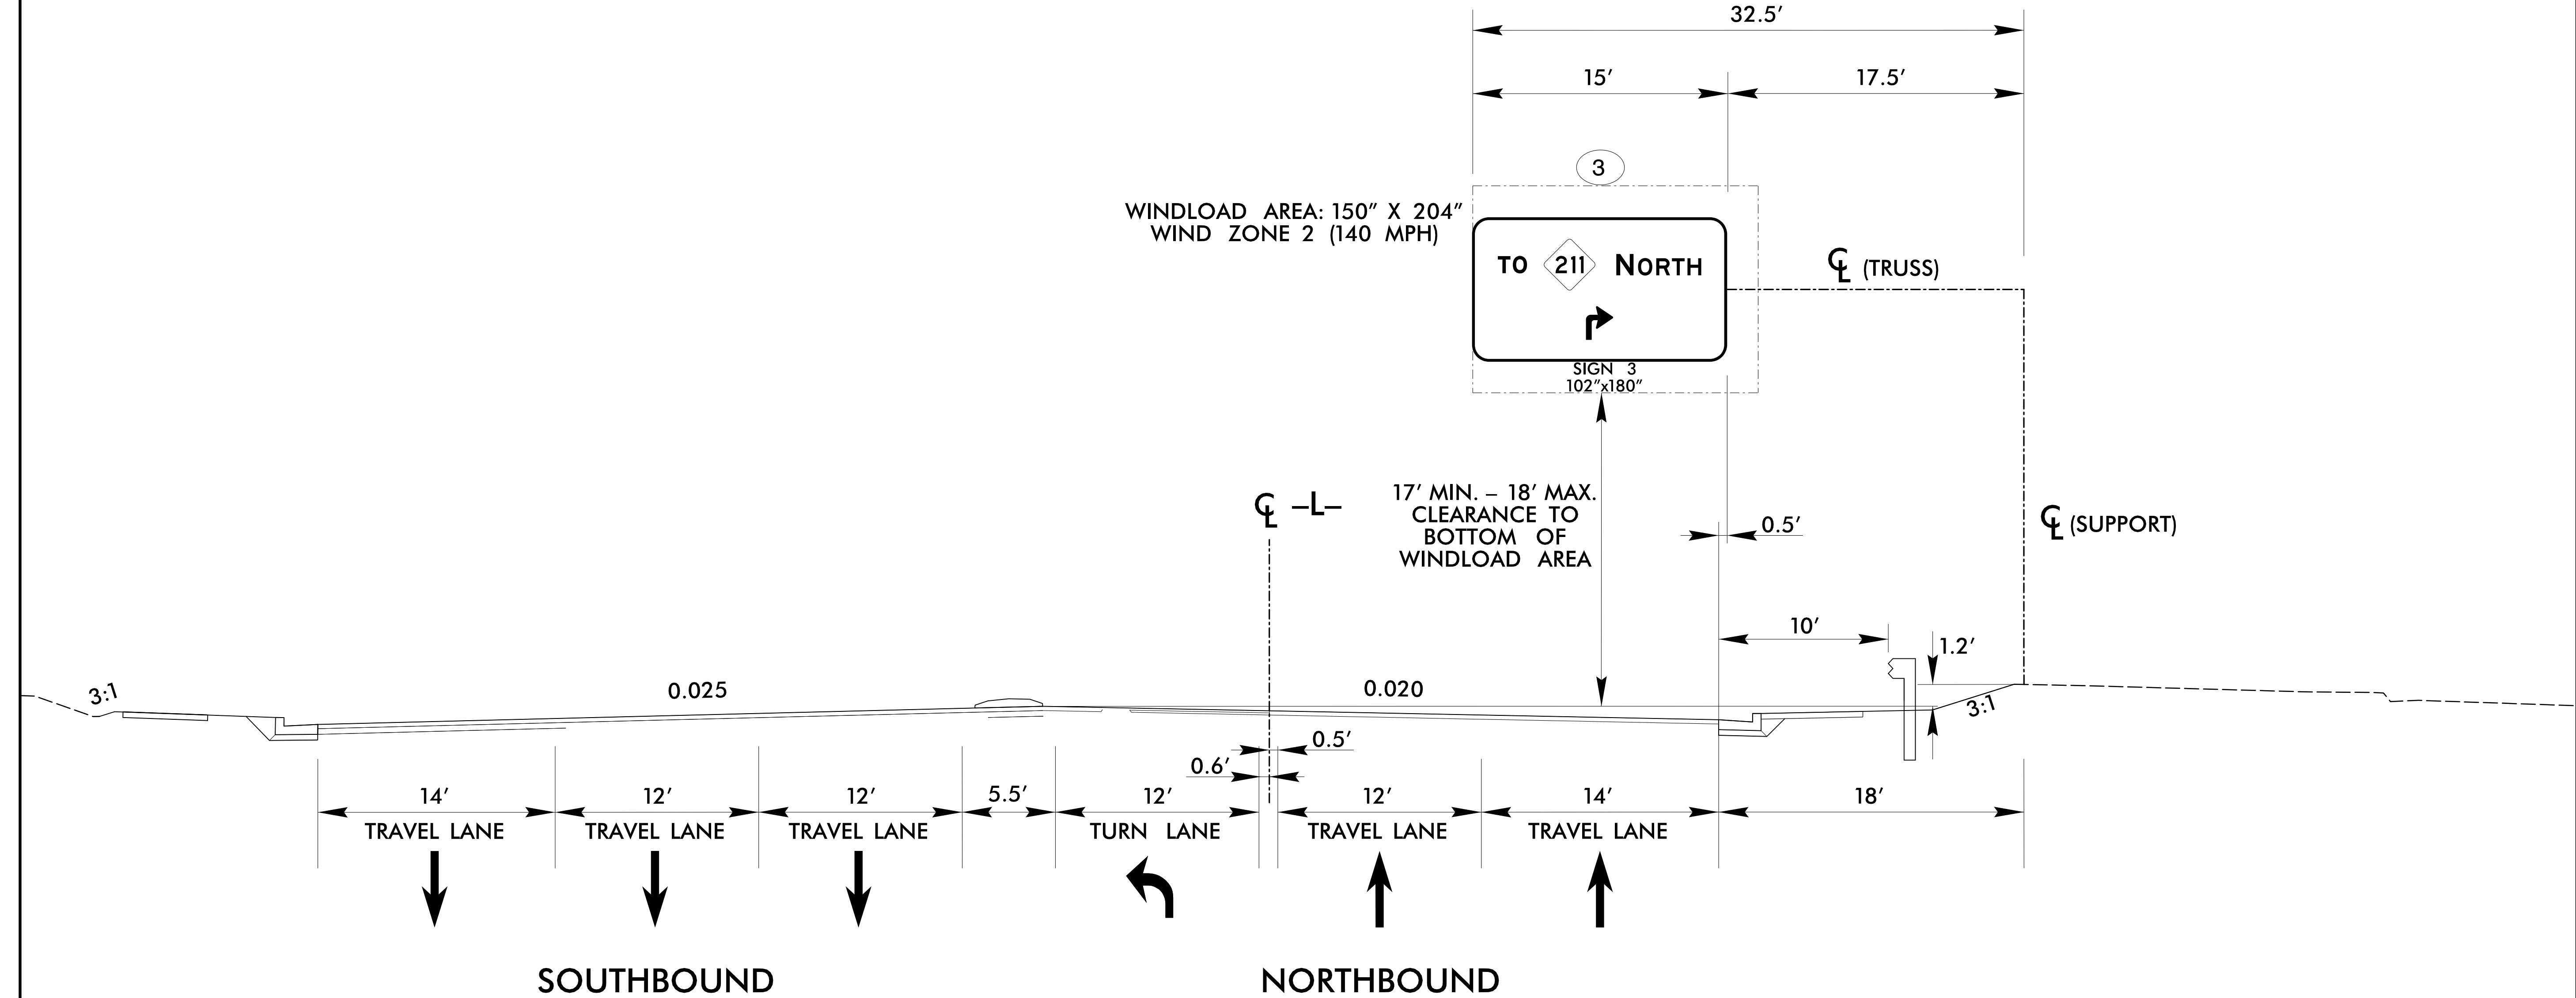

NOTES:

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR THE SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 140 MPH.

STRUCTURE INVENTORY NUMBER - 770585

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loulli DATE: 3/6/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
057348
ENGINEER
SARA S. LOWELL

OVERHEAD SIGN ASSEMBLY "B"
-L- STA 49+50+/-

SCALE: NONE		REVISIONS
DATE: 06/08/20		
DWG. BY: ENP		
DESIGN BY: ENP		
REVIEWED BY: PAL		


CADD
FILE

8/17/99

stv

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-3F

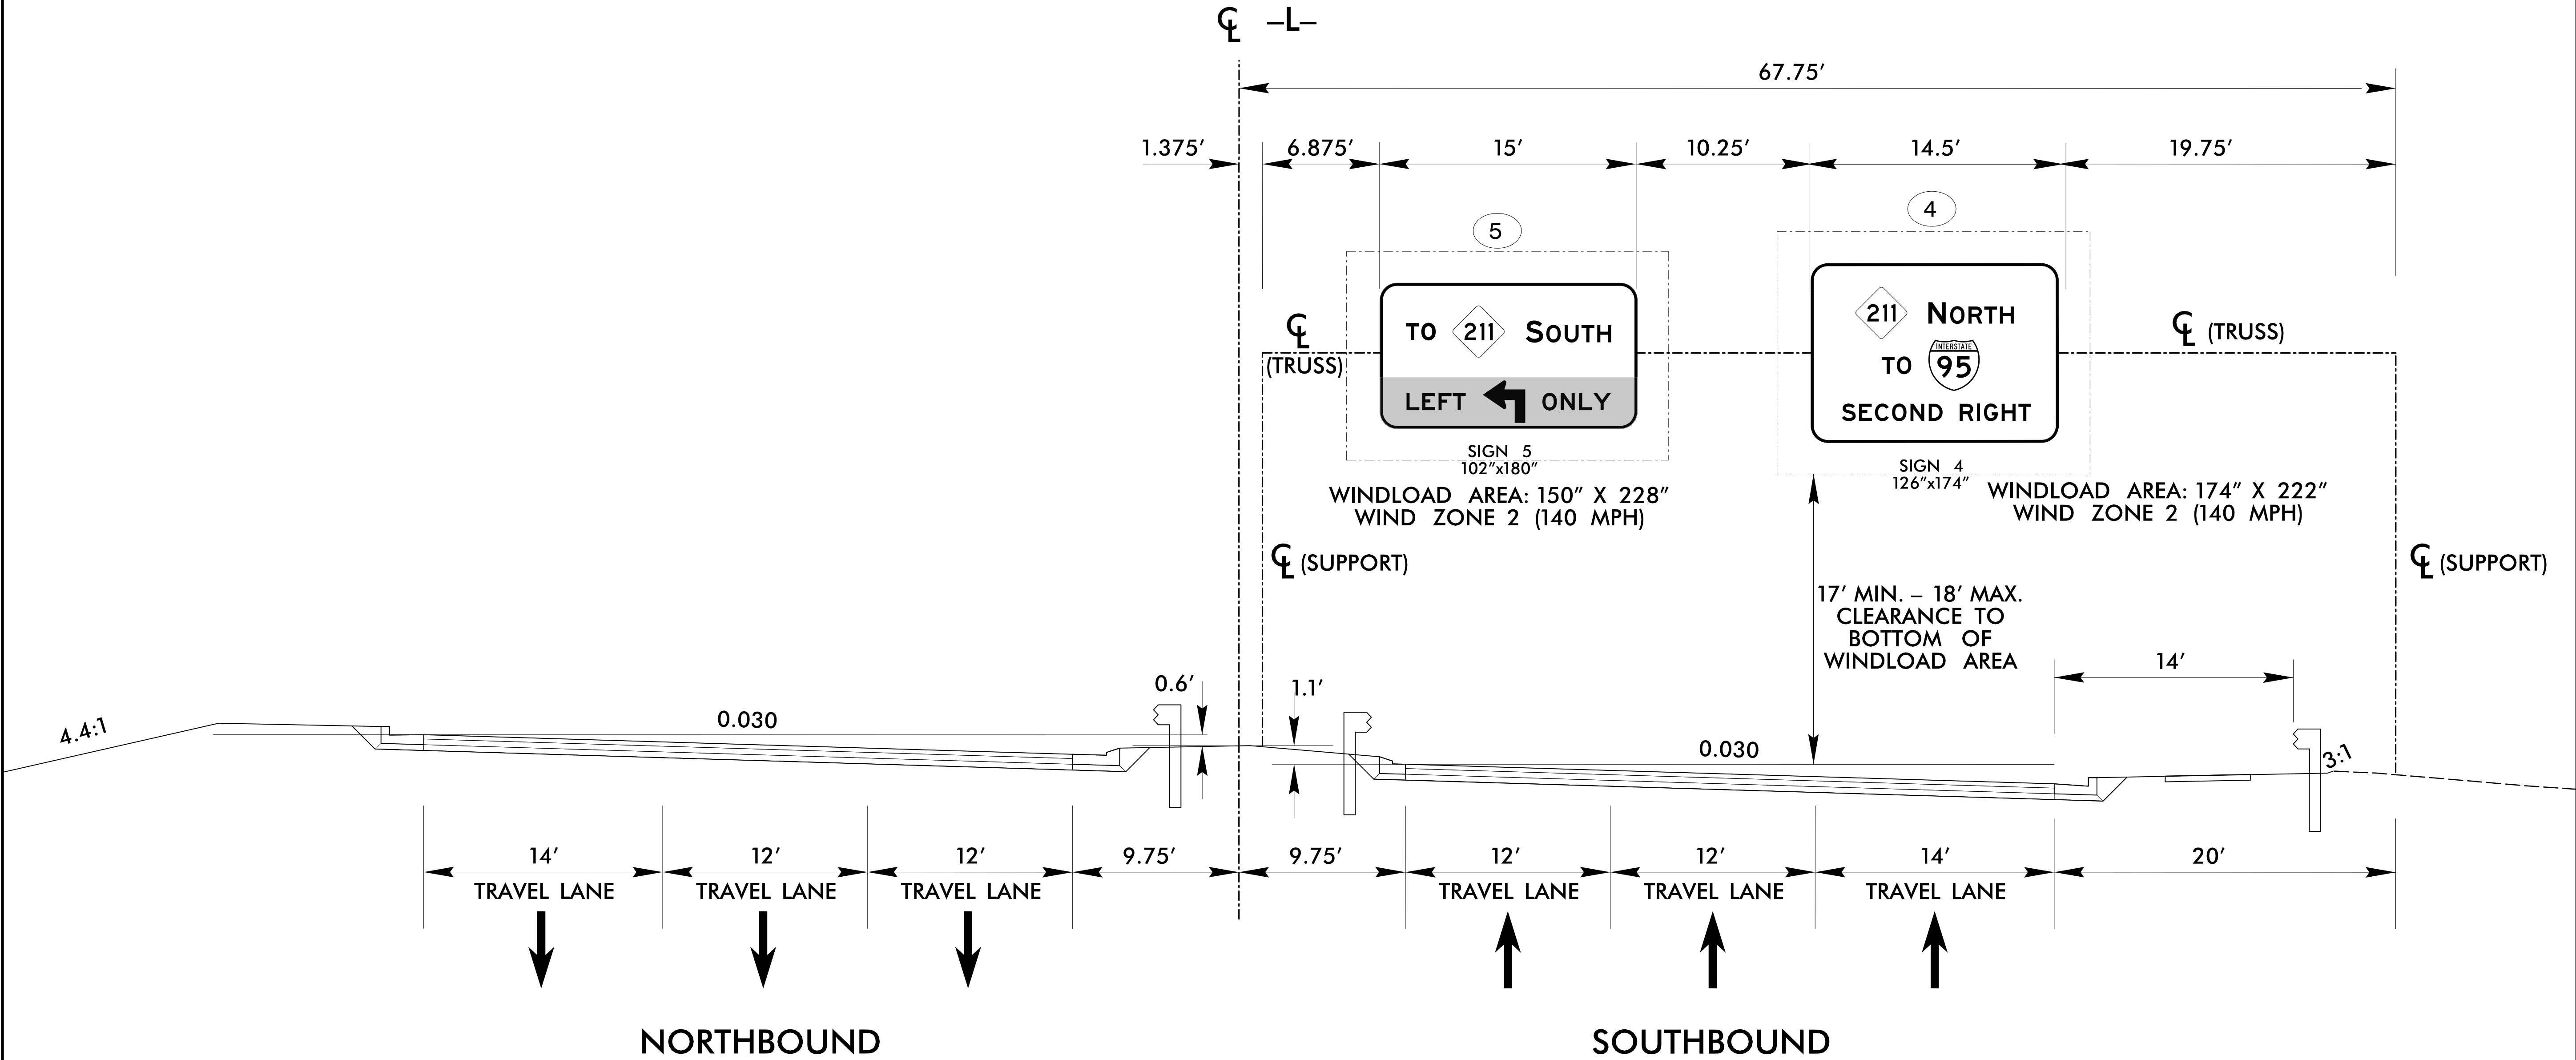

NOTES:

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR THE SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 140 MPH.

STRUCTURE INVENTORY NUMBER 770586

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: *Sara Loulti* DATE: 3/6/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
057348
ENGINEER
SARA S. LOULTI

OVERHEAD SIGN ASSEMBLY "C"
-L- STA 60+05+/-

SCALE: NONE		REVISIONS
DATE: 06/08/20		
DWG. BY: ENP		
DESIGN BY: ENP		
REVIEWED BY: PAL		CADD FILE


8/17/99

3/6/2025
C:\TrafficControl\SIGN\U5797-SIGN\PSH04.dgn
PSH04

st^v

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-4

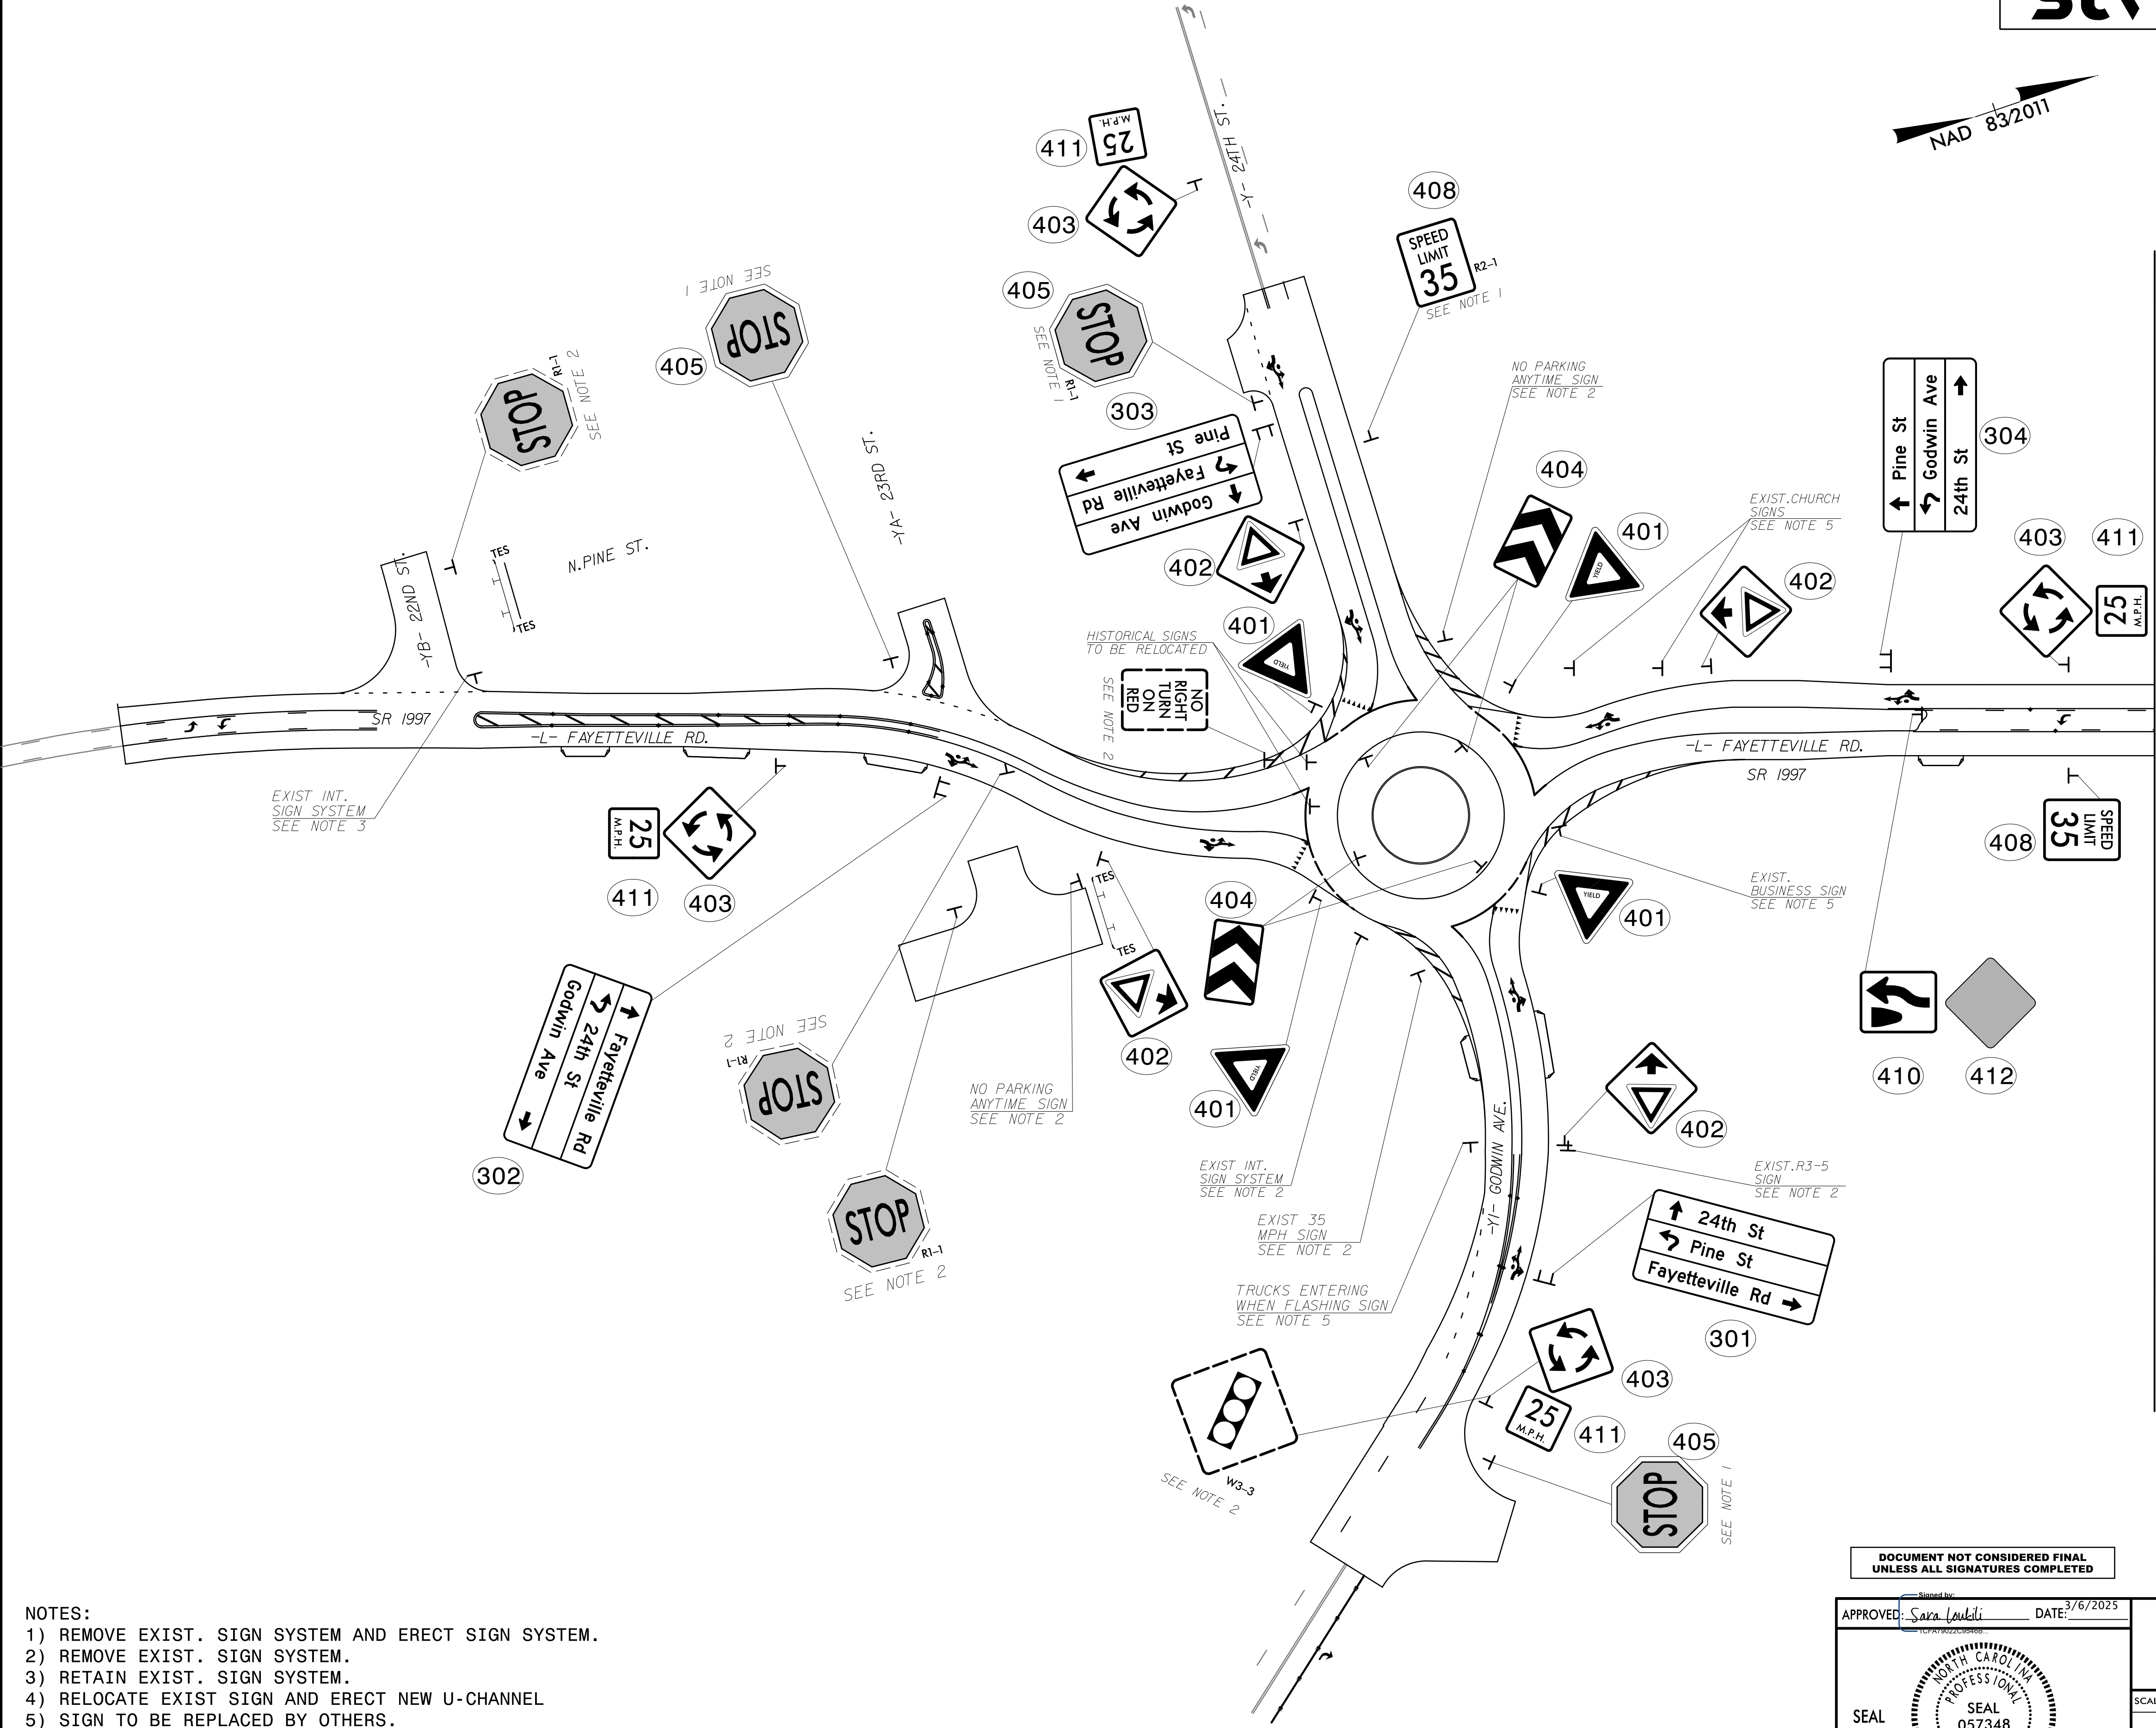

- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Laubli DATE: 2/6/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
ENGINEER
SEAL
057348
SARA S. LAUBLI

SIGNING DETAIL		
SCALE: NONE		REVISIONS
DWG. BY: ENP		
DESIGN BY: WDM		
REVIEWED BY: PAL		




STV Engineers, Inc.

2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-5

MATCHLINE -L- STA 30+00 SEE SIGN-4

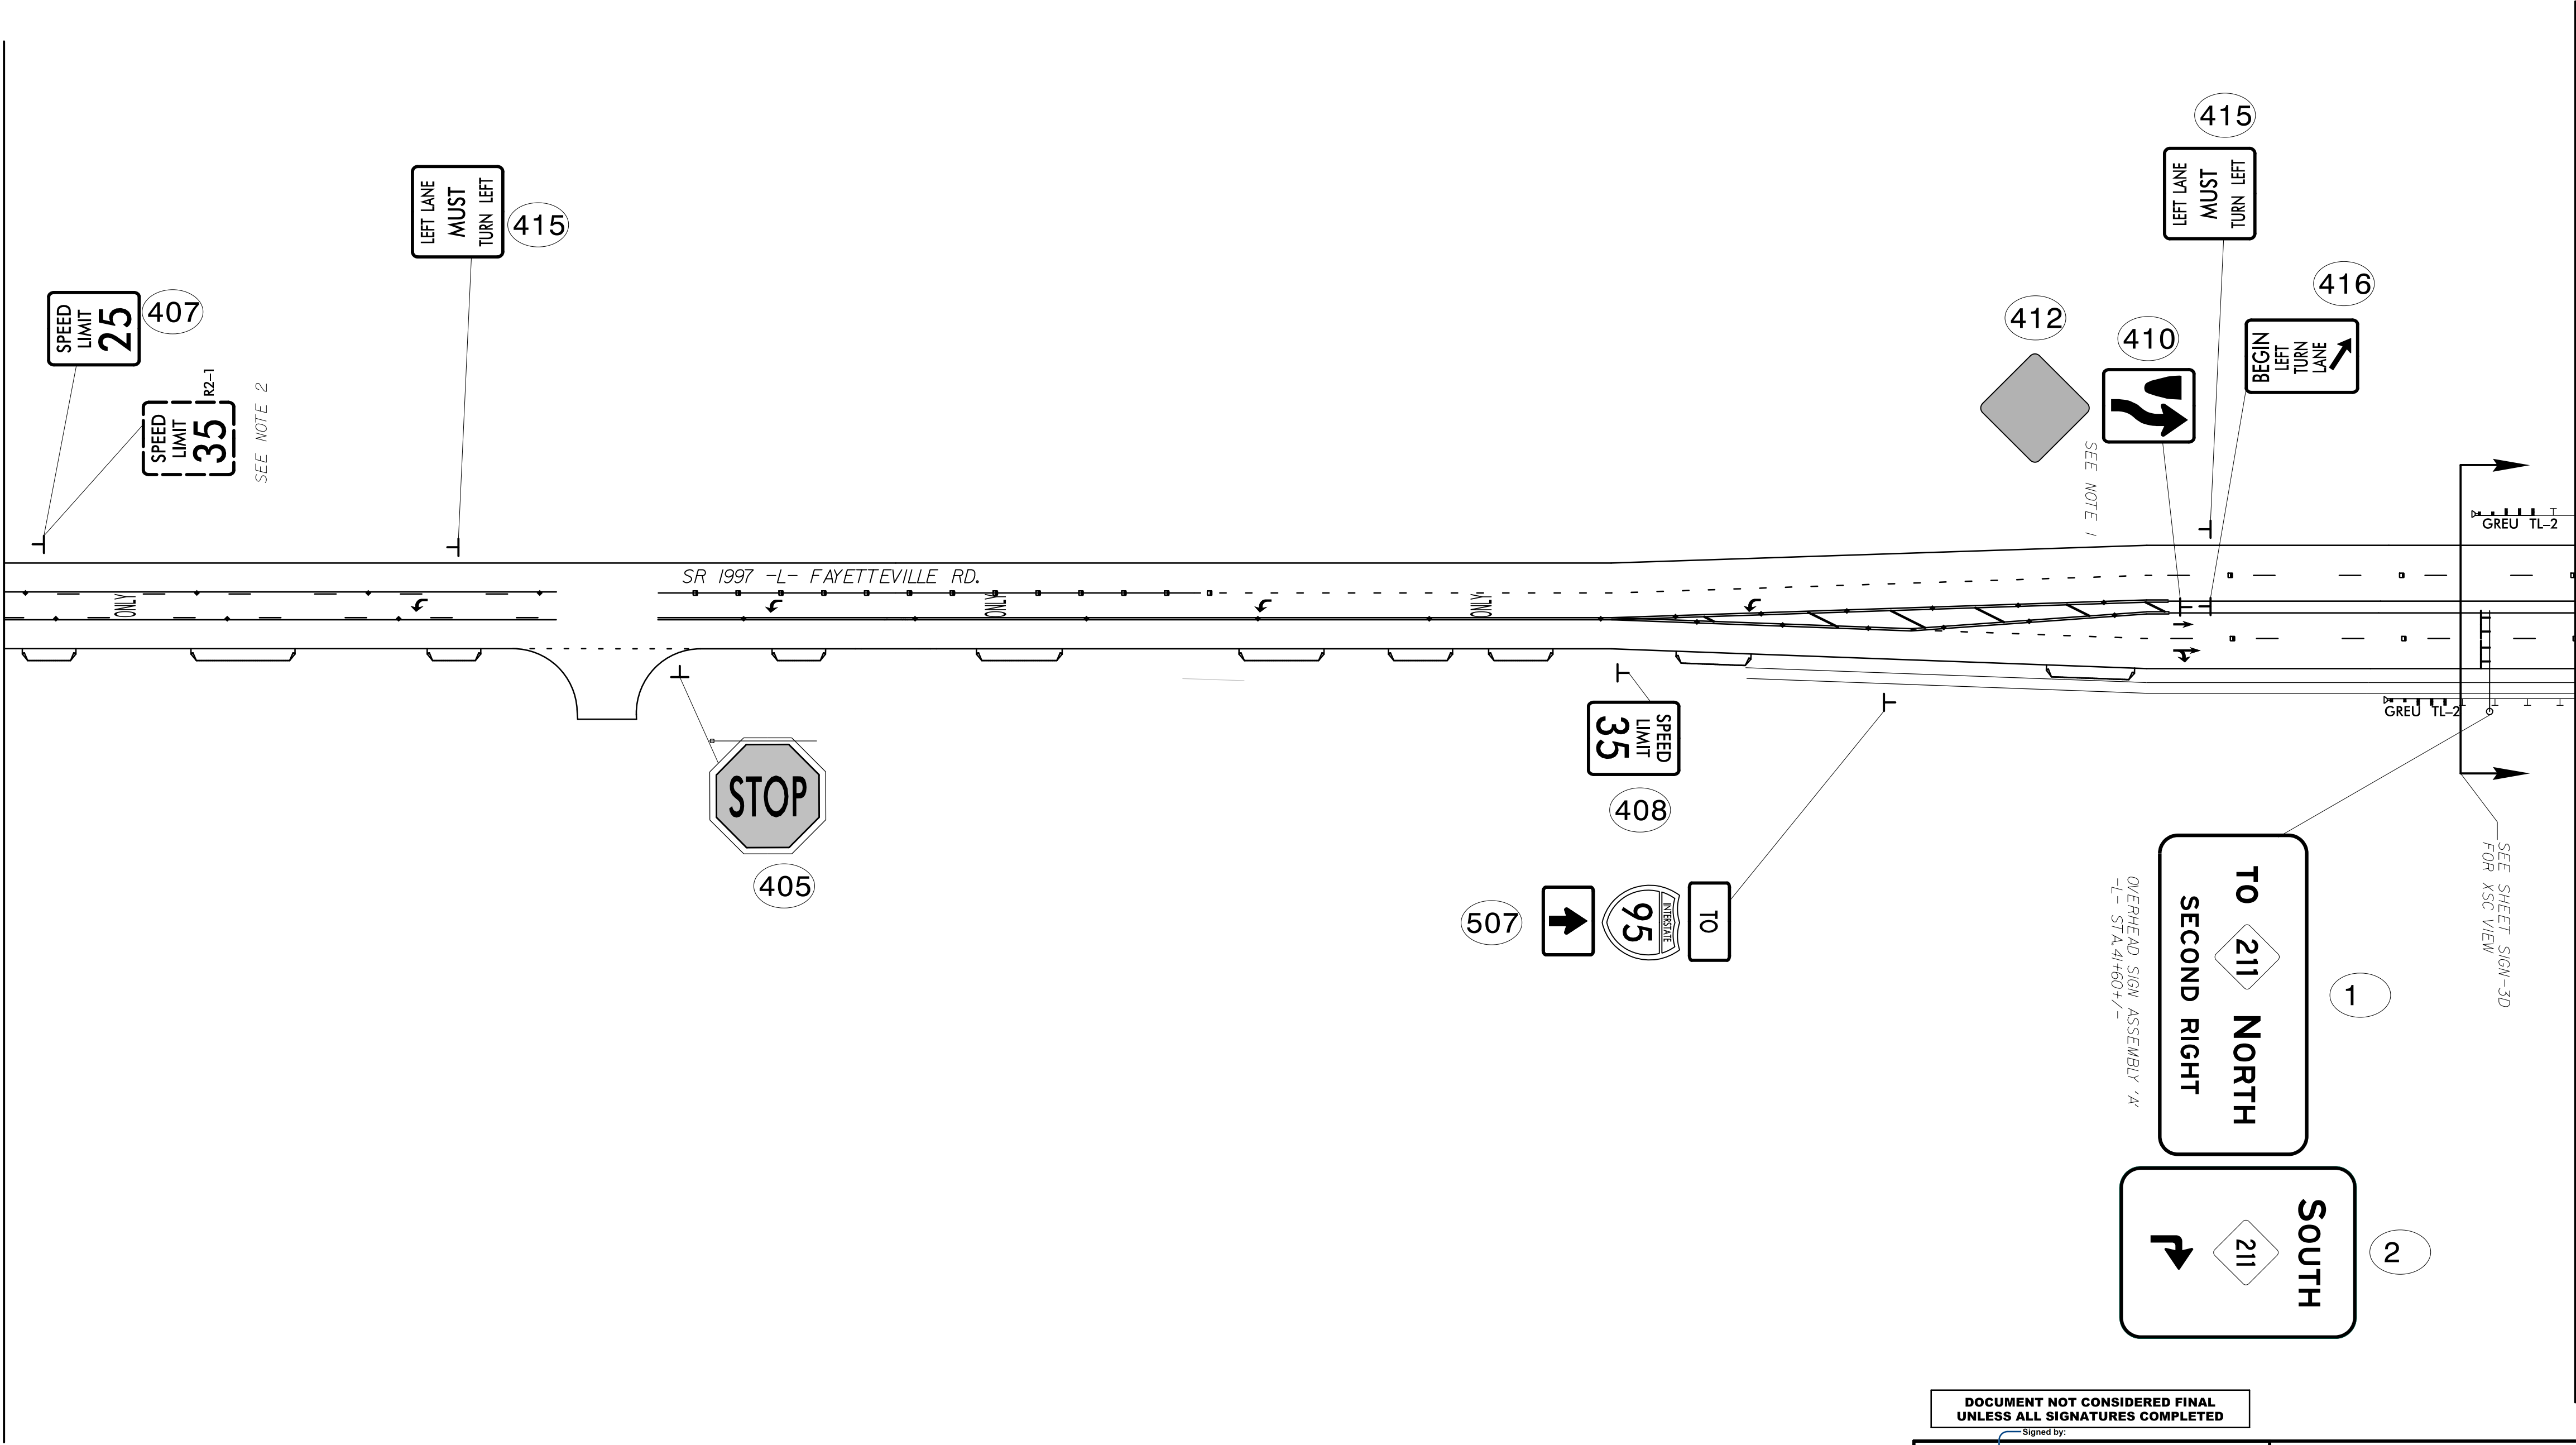


MATCHLINE -L- STA 42+00 SEE SIGN-6

- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loukili DATE: 3/6/2025

SEAL

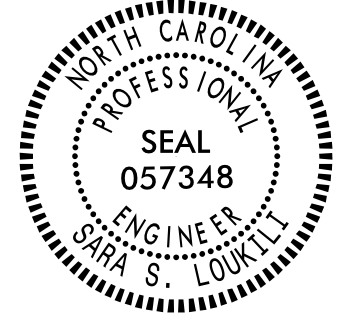


SIGNING DETAIL

SCALE:	NONE
DWG. BY:	ENP
DESIGN BY:	WDM
REVIEWED BY:	PAL



REVISIONS	
CADD FILE	

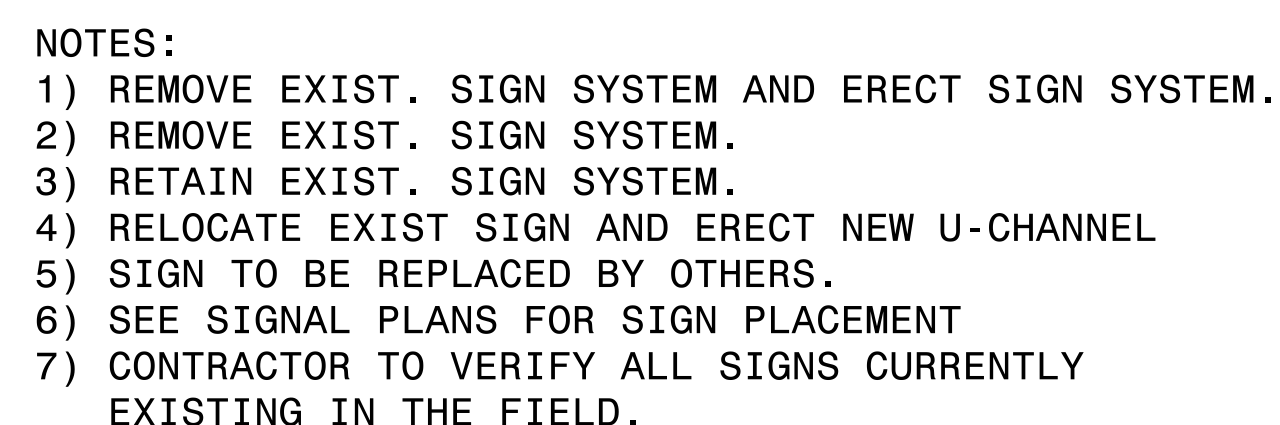

SIGNING DETAIL		
SCALE: NONE		REVISIONS
DWG. BY: ENP		
DESIGN BY: WDM		
REVIEWED BY: PAL		

NAD 83/2011



- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.

Signed by: _____
APPROVED: Sara Loukili DATE: 3/6/2025

Professional Engineer Seal for North Carolina, State No. 057348, Sara S. Loukili.

SIGNING DETAIL

SCALE:	NONE
DWG. BY:	ENP
DESIGN BY:	WDM
REVIEWED BY:	PAL




REVISIONS

CAD
FILE

st^v

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-8

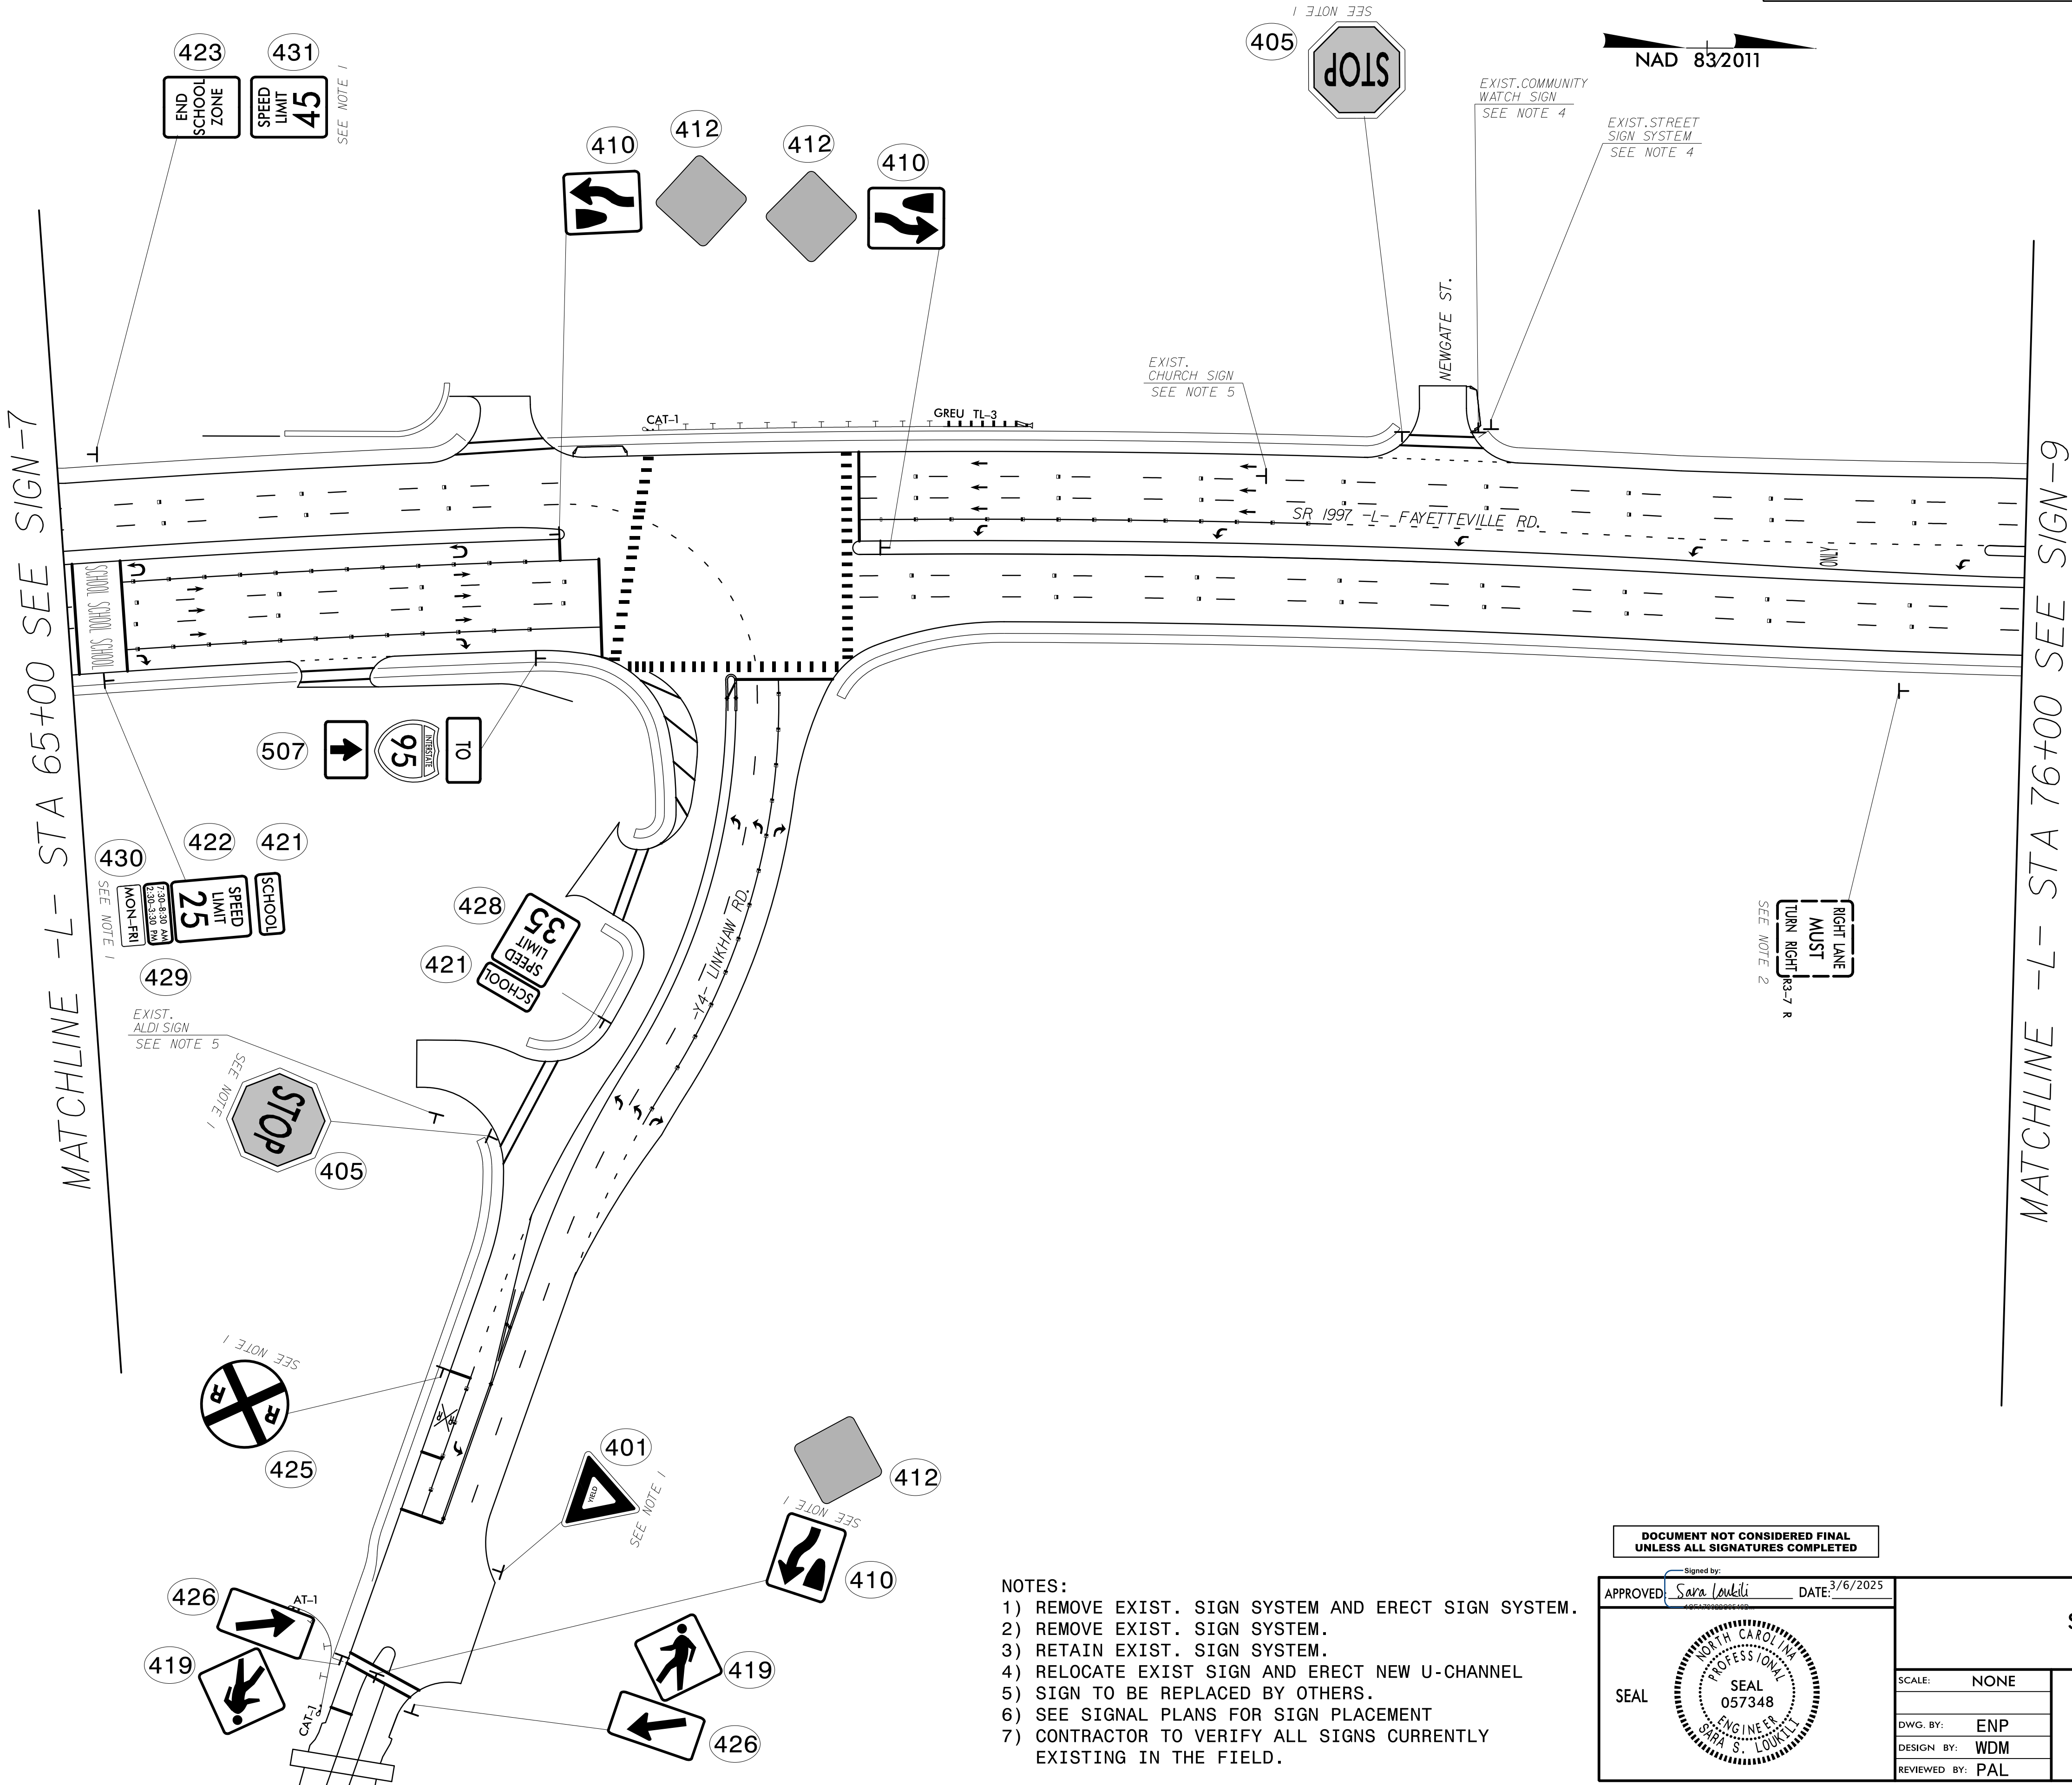

- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loueli DATE: 3/6/2025

SEAL
NORTH CAROLINA
PROFESSIONAL
SEAL
057348
ENGINEER
SARA S. LOUELI

SIGNING DETAIL		
SCALE: NONE		REVISIONS
DWG. BY: ENP		
DESIGN BY: WDM		
REVIEWED BY: PAL		
CADD FILE		

MATCHLINE -L- STA 76+00 SEE SIGN-8

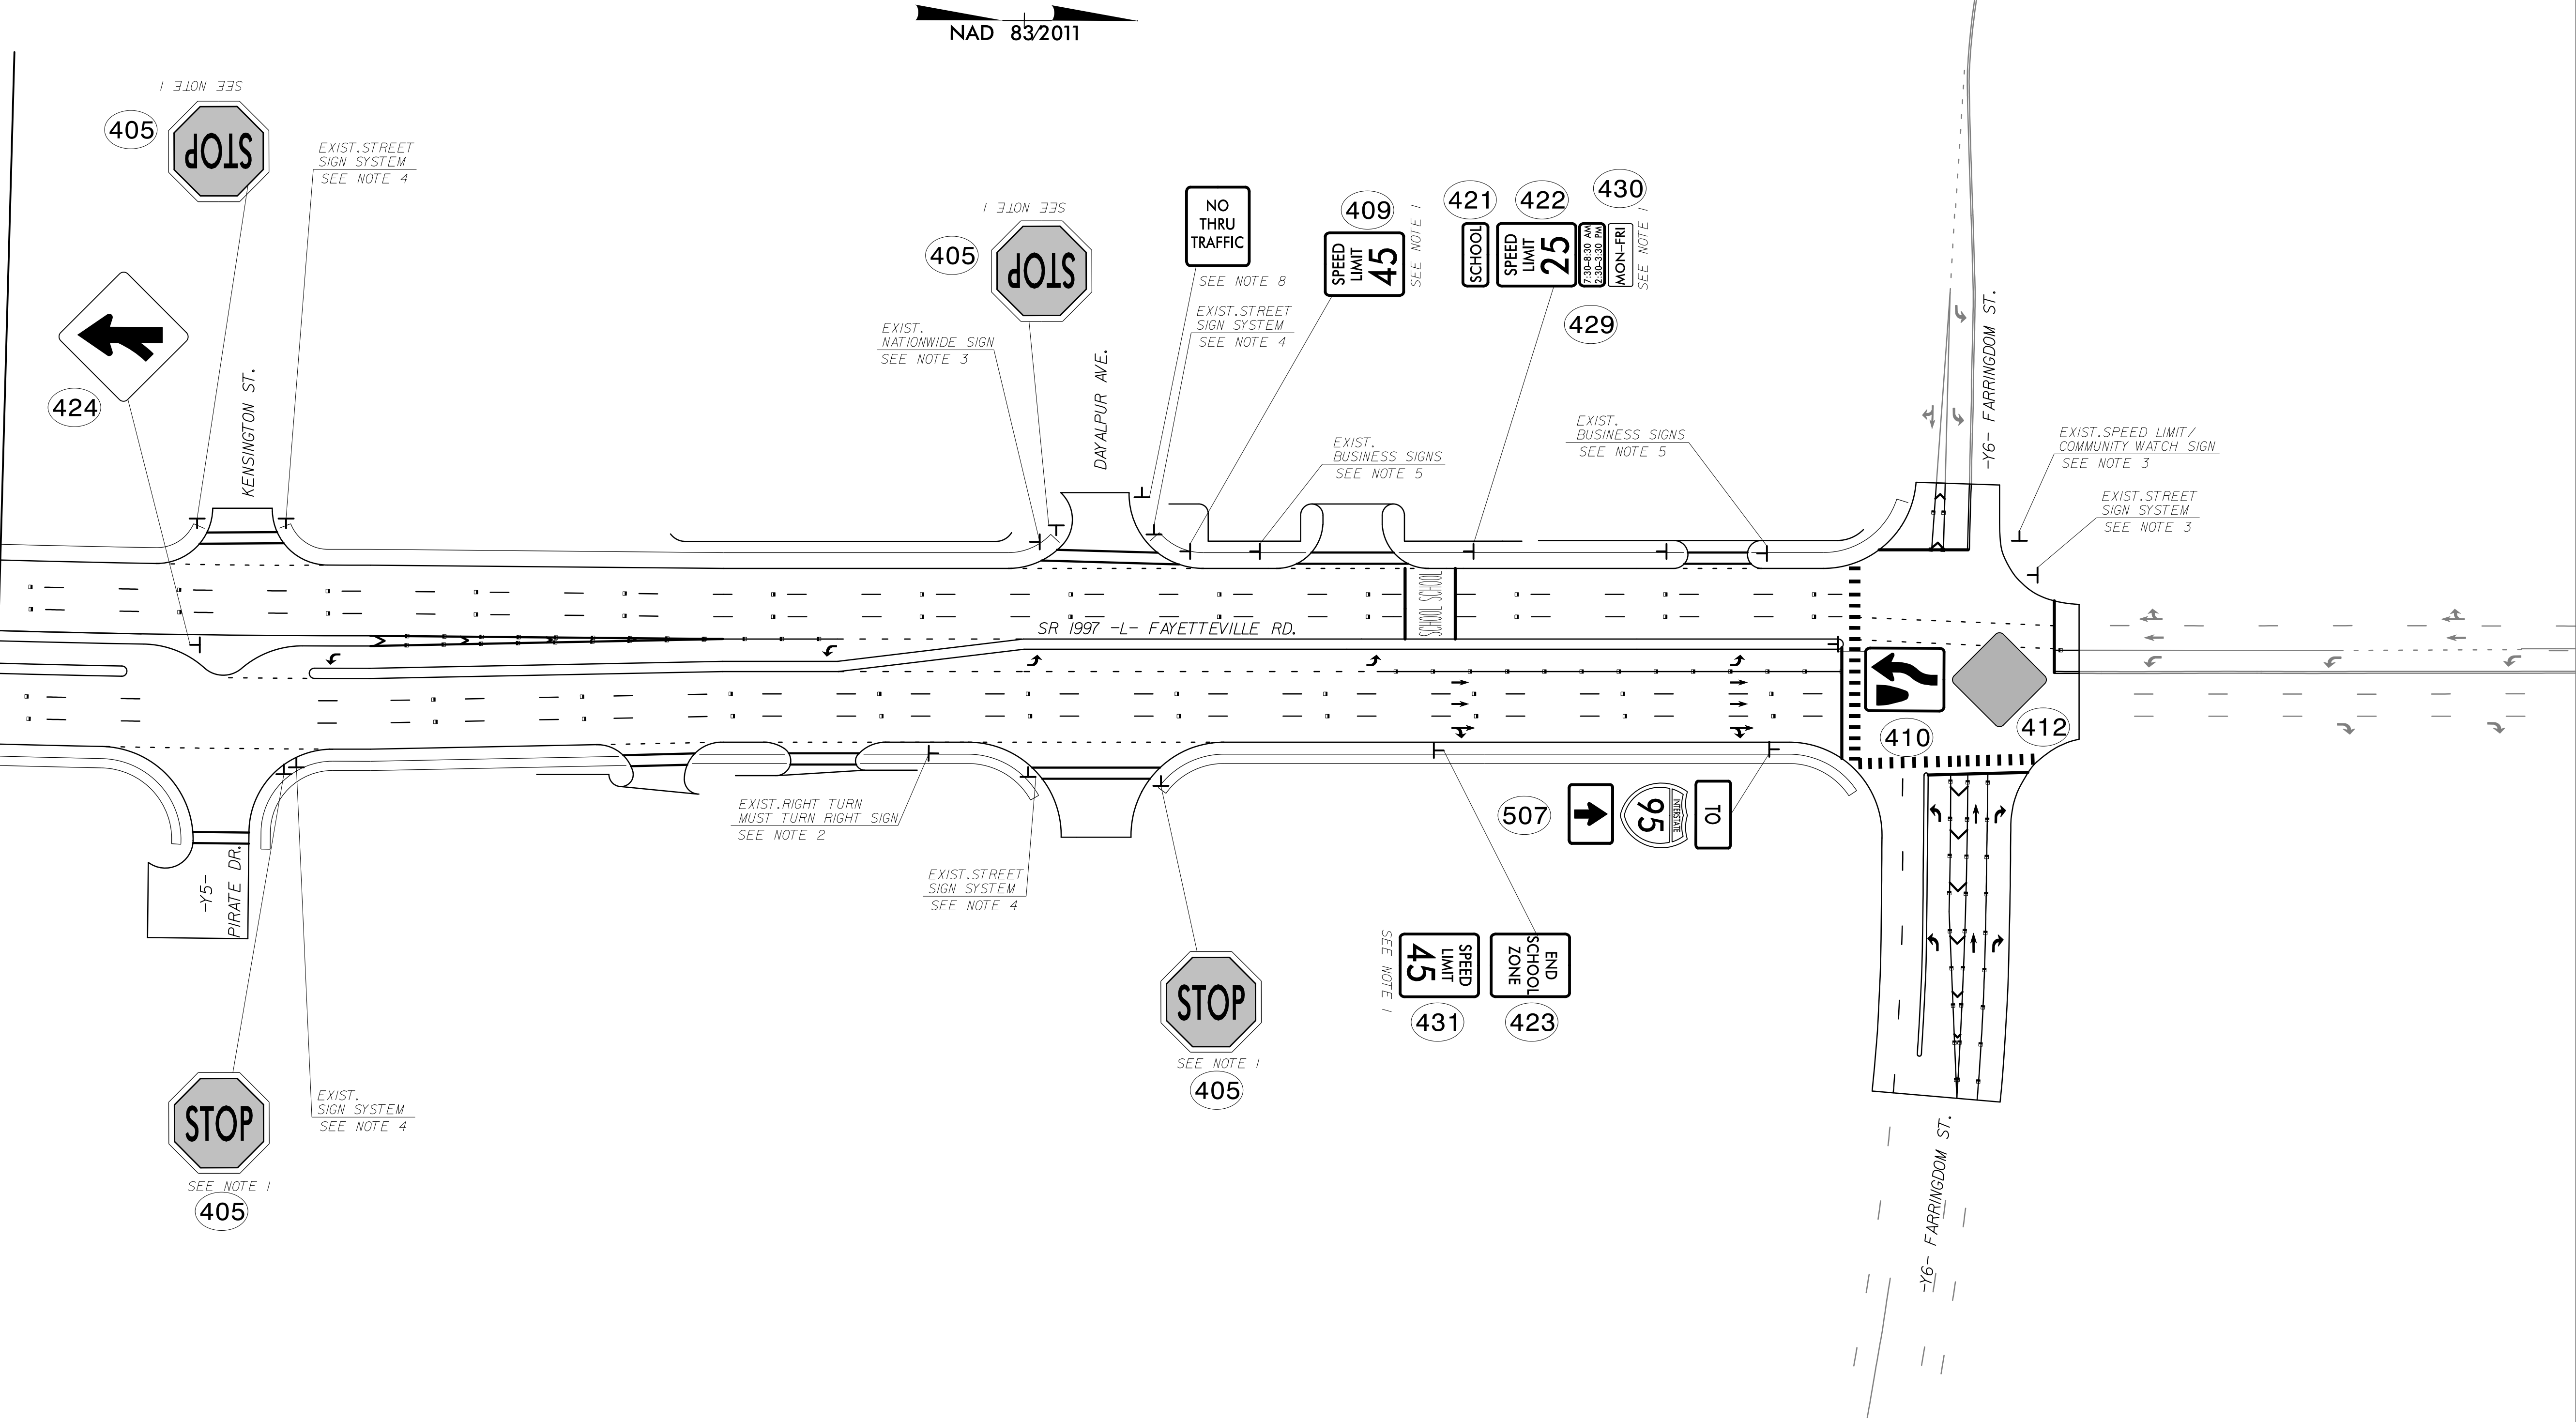



STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-9


- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.
 - 8) SIGN ERECTION, RELOCATE SIGN TYPE E.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

Signed by:

APPROVED: Sara Loukili DATE: 3/6/2025

SEAL

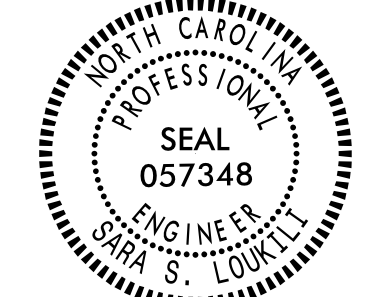

SIGNING DETAIL

SCALE: NONE

DWG. BY: ENP

DESIGN BY: WDM

REVIEWED BY: PAL



REVISIONS

CADD FILE

8/17/99


3/6/2025
C:\TrafficControl\SIGN\U5797_SIGN\PSH10.dgn
MicroWD

stv

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-10

NAD 832011

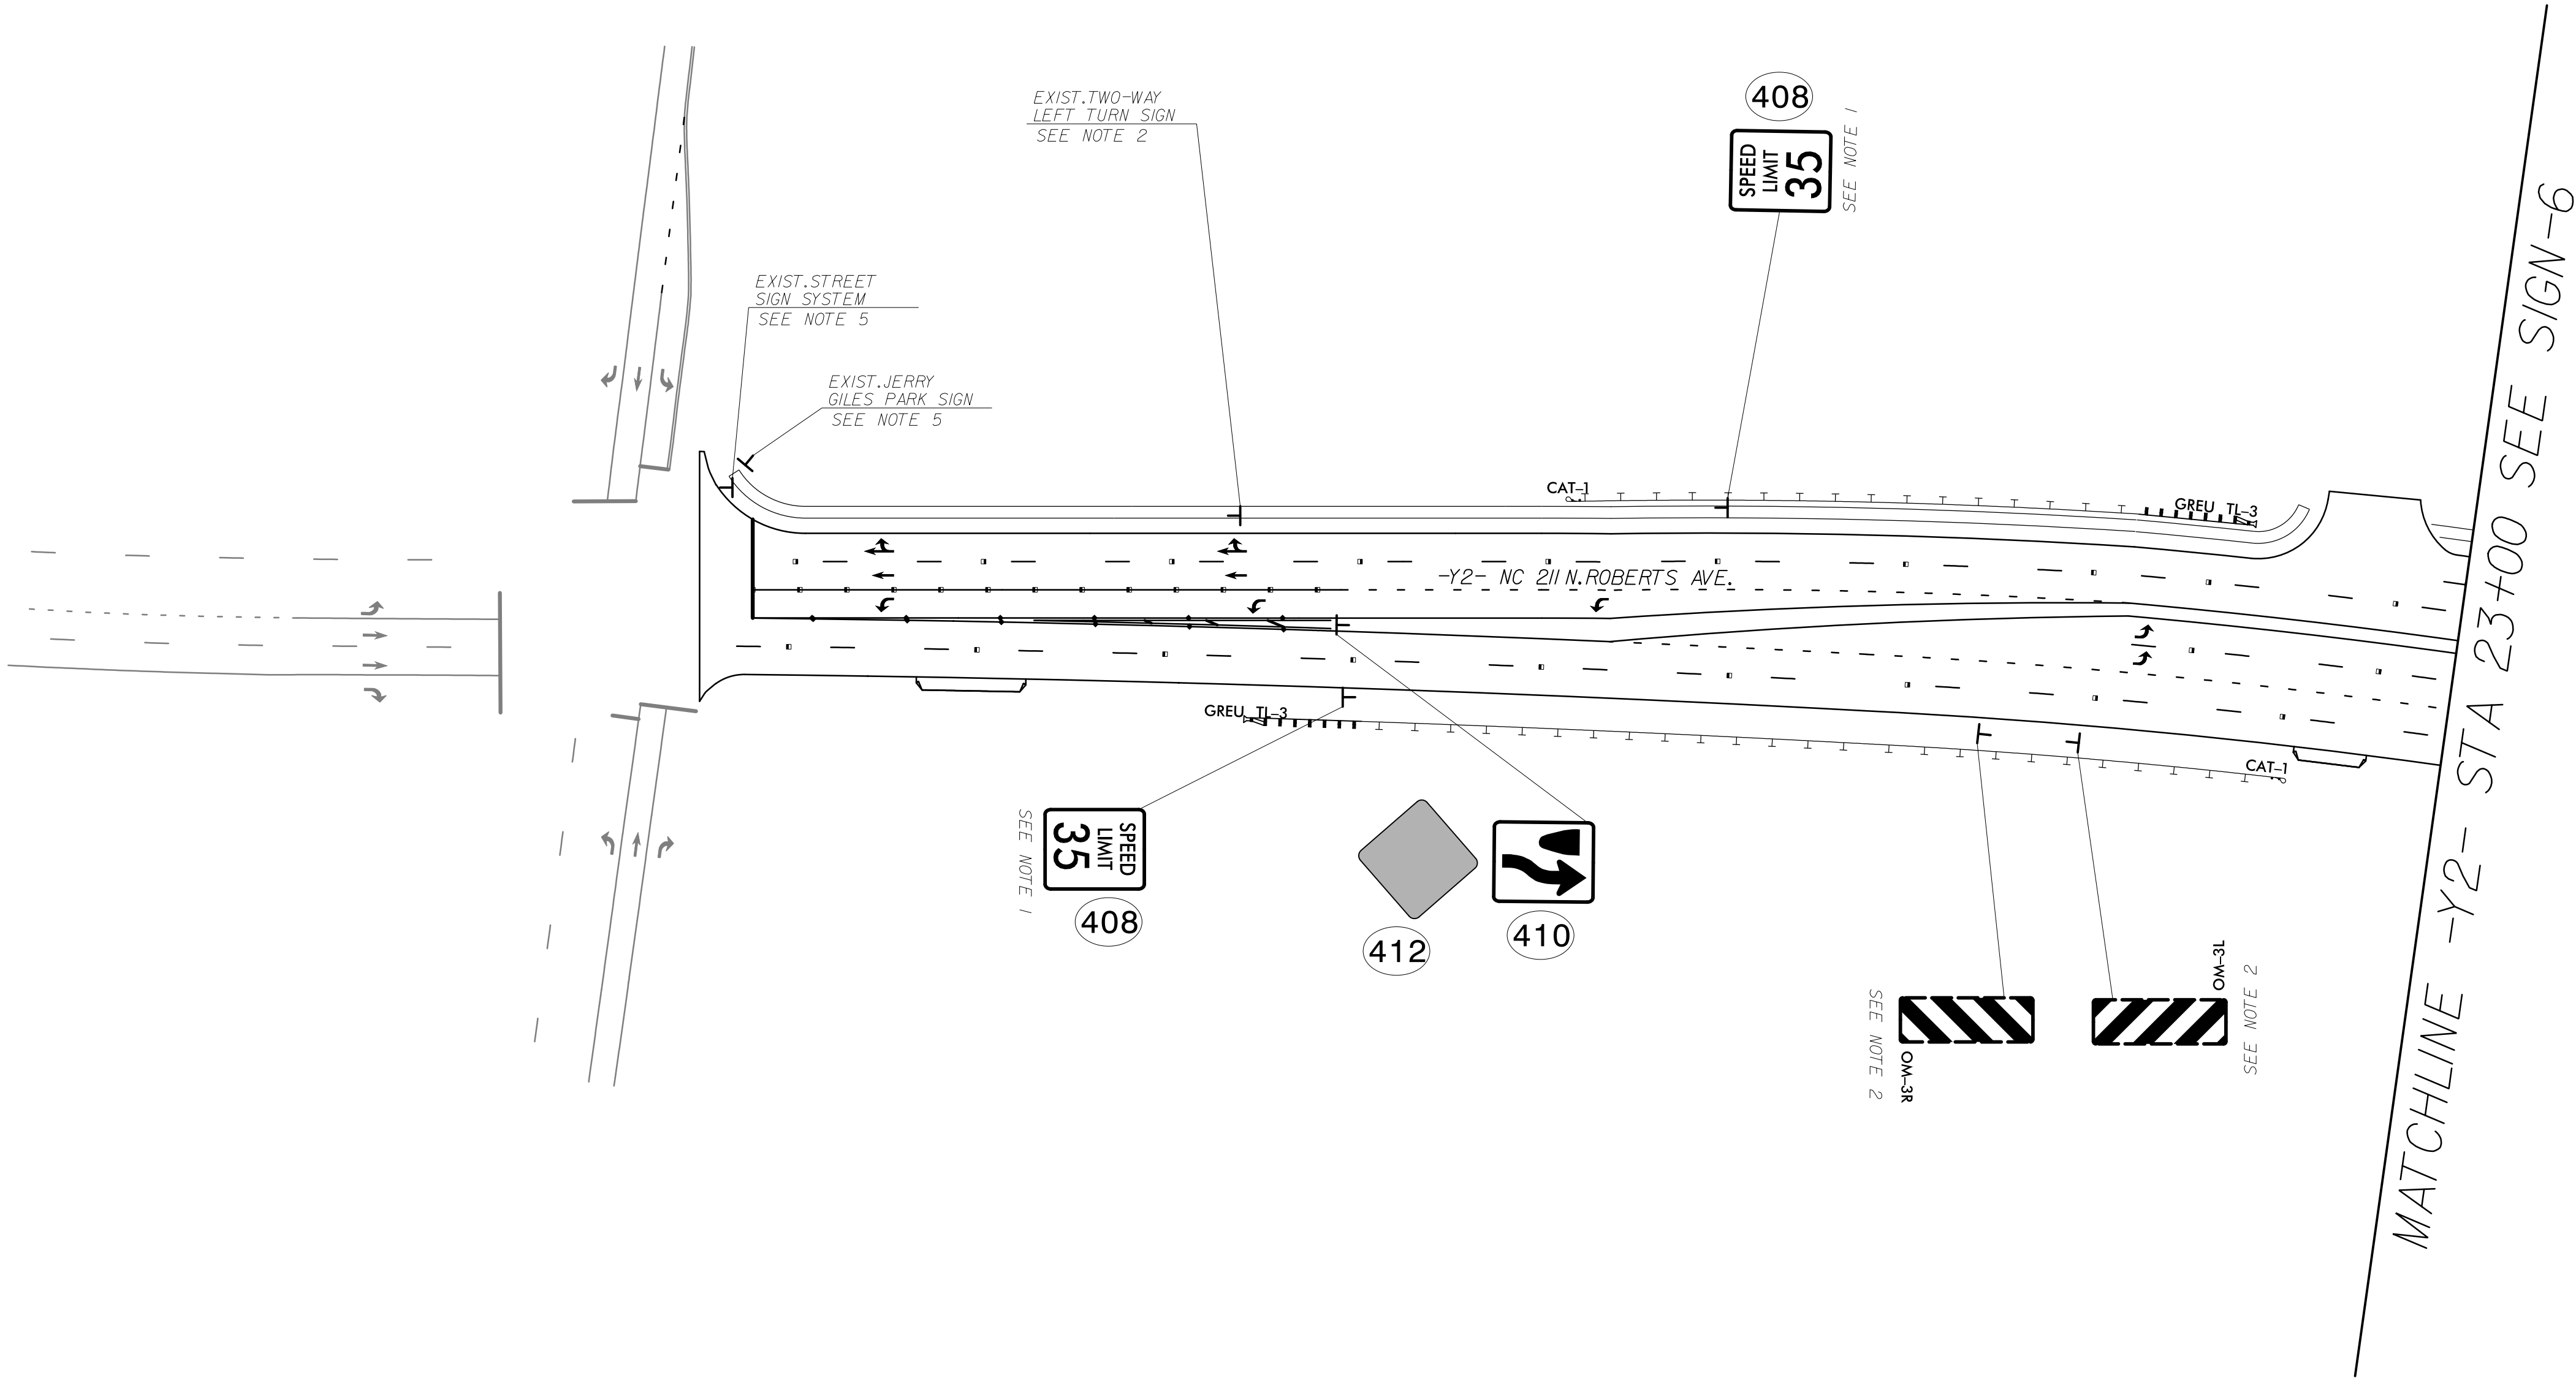

- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loukili DATE: 3/6/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
ENGINEER
SEAL
057348
SARA S. LOUKILI

SIGNING DETAIL			
SCALE:	NONE		REVISIONS
DWG. BY:	ENP		
DESIGN BY:	WDM		
REVIEWED BY:	PAL		
CADD FILE			

8/17/99

3/6/2025
C:\TrafficControl\SIGN\U5797_SIGN\PSH11.dgn
Michele


stv

STV Engineers, Inc.
2121 RDU Center Dr.
Suite 210
Morrisville, NC 27560
NC License Number F-0991

PROJ. REFERENCE NO.	SHEET NO.
U-5797	SIGN-11



MATCHLINE -Y2- STA 32+00 SEE SIGN-6

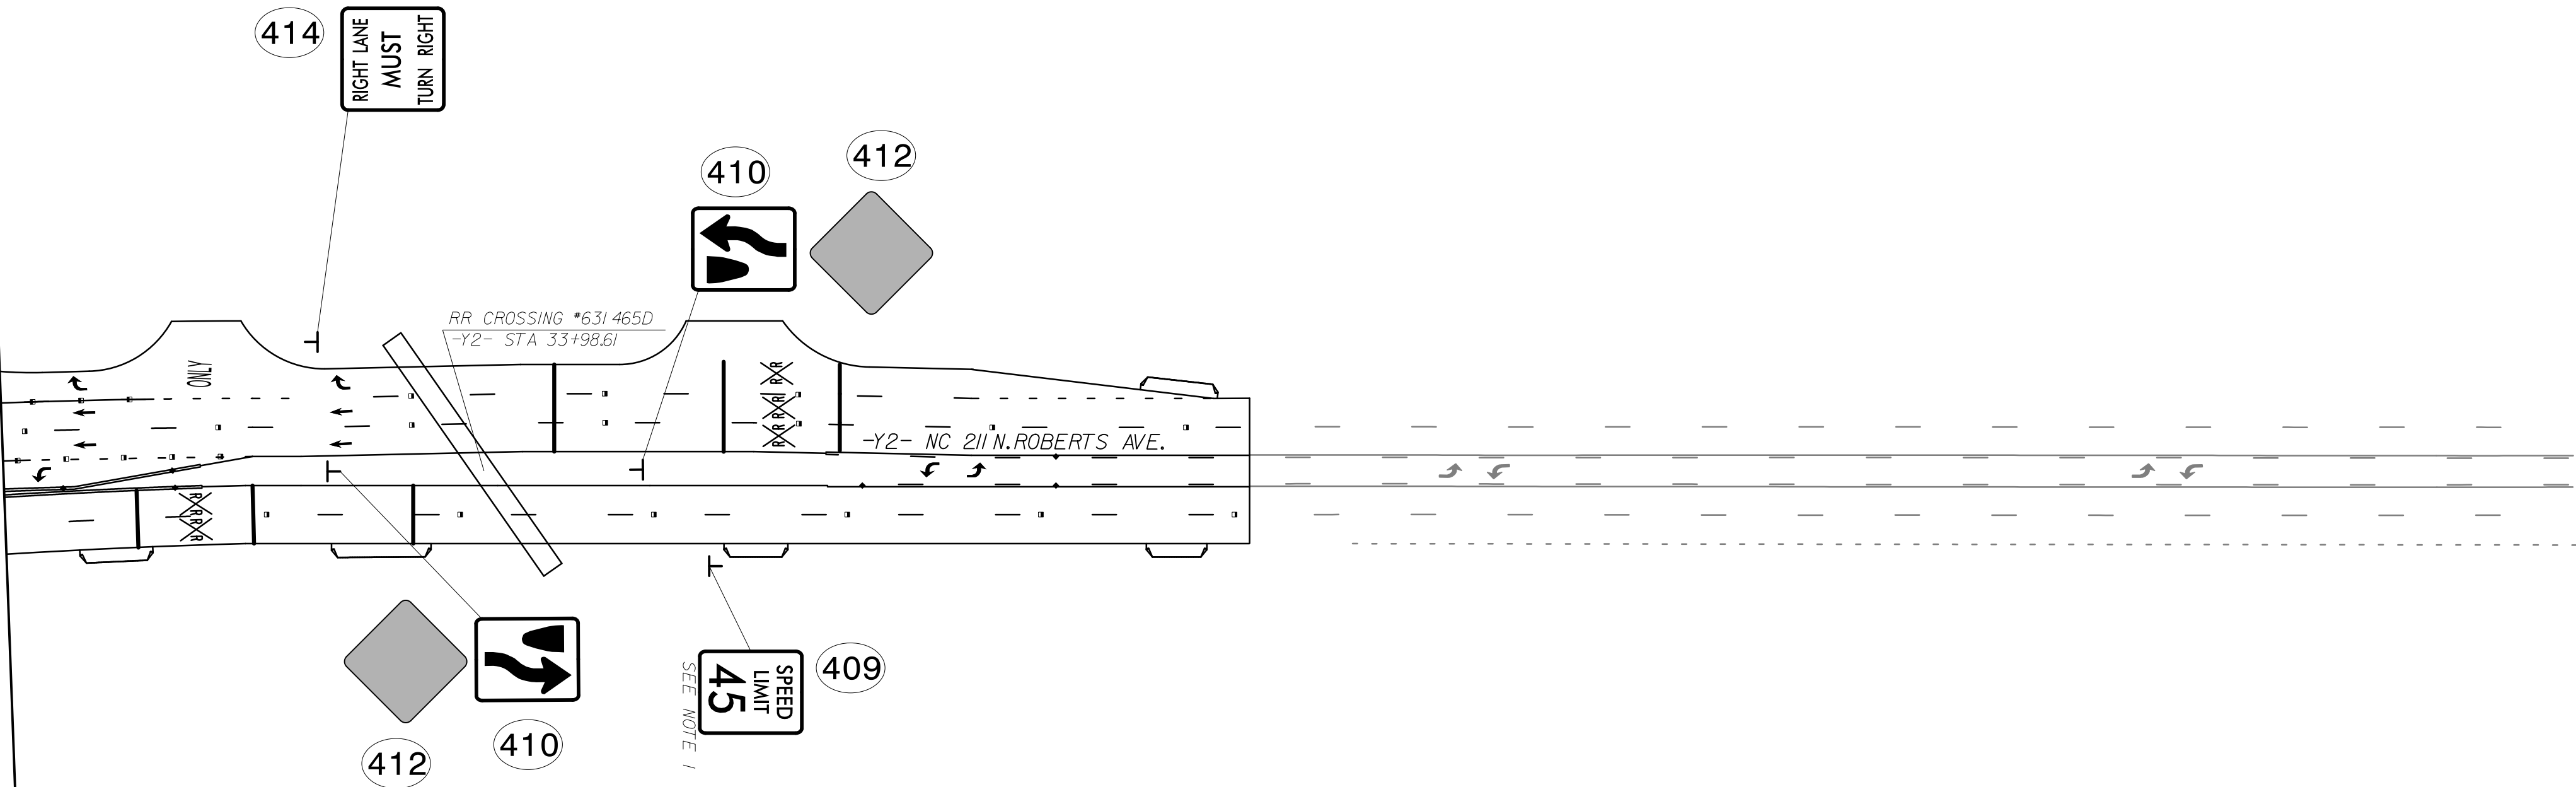

- NOTES:
- 1) REMOVE EXIST. SIGN SYSTEM AND ERECT SIGN SYSTEM.
 - 2) REMOVE EXIST. SIGN SYSTEM.
 - 3) RETAIN EXIST. SIGN SYSTEM.
 - 4) RELOCATE EXIST SIGN AND ERECT NEW U-CHANNEL
 - 5) SIGN TO BE REPLACED BY OTHERS.
 - 6) SEE SIGNAL PLANS FOR SIGN PLACEMENT
 - 7) CONTRACTOR TO VERIFY ALL SIGNS CURRENTLY EXISTING IN THE FIELD.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

APPROVED: Sara Loukeli DATE: 3/6/2025

SEAL

NORTH CAROLINA
PROFESSIONAL
ENGINEER
SEAL
057348
SARA S. LOUKELI

SIGNING DETAIL			
SCALE:	NONE		
DWG. BY:	ENP		
DESIGN BY:	WDM		
REVIEWED BY:	PAL		
		CADD FILE	