


18 CHANNEL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)
 REMOVE DIODE JUMPERS 1-5, 1-6, 1-9, 1-11, 1-15, 2-5, 2-6, 2-9, 2-11, 2-12, 2-13, 2-15, 4-8, 4-10, 4-14, 4-16, 5-9, 5-11, 5-12, 5-13, 6-9, 6-11, 6-12, 6-13, 6-15, 8-10, 8-14, 8-16, 9-11, 9-12, 9-13, 9-15, 10-14, 10-16, 11-12, 11-13, 11-15, 12-13, 12-15, 13-15 AND 14-16.



REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Start for phases 4 and 8.
- Program controller to start up in phase 2 Green No Walk and 6 Green No Walk.
- If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
- The cabinet and controller are part of the D10-05_Matthews Signal System.

EQUIPMENT INFORMATION

Controller.....2070LX
 Cabinet.....332 w/ Aux
 Software.....Q-Free MAXTIME
 Cabinet Mount.....Base
 Output File Positions.....18 With Aux. Output File
 Load Switches Used.....S1, S2, S3, S5, S6, S7, S8, S9, S11, S12, AUX S1, AUX S2, AUX S4, AUX S5
 Phases Used.....1, 2, 2PED, 4, 4PED, 5, 6, 6PED, 8, 8PED

Overlap "1".....*
 Overlap "2".....*
 Overlap "3".....*
 Overlap "4".....*

*See overlap programming detail on sheet 2


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	SPARE	OL3	OL4	SPARE
SIGNAL HEAD NO.	11	21,22	P21, P22	NU	41,42	P41, P42	51	61,62	P61, P62	NU	82,83	P81, P82	11	81	NU	51	23	NU
RED		128			101			134			107							A101
YELLOW	*	129			102		*	135			108							
GREEN		130			103			136			109							
RED ARROW																A121	A124	A114
YELLOW ARROW																A122	A125	A115
FLASHING YELLOW ARROW																A123	A126	A116
GREEN ARROW	127							133										
Hand				113					119			110						
Walker				115								112						

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail below.

INPUT FILE POSITION LAYOUT

(front view)

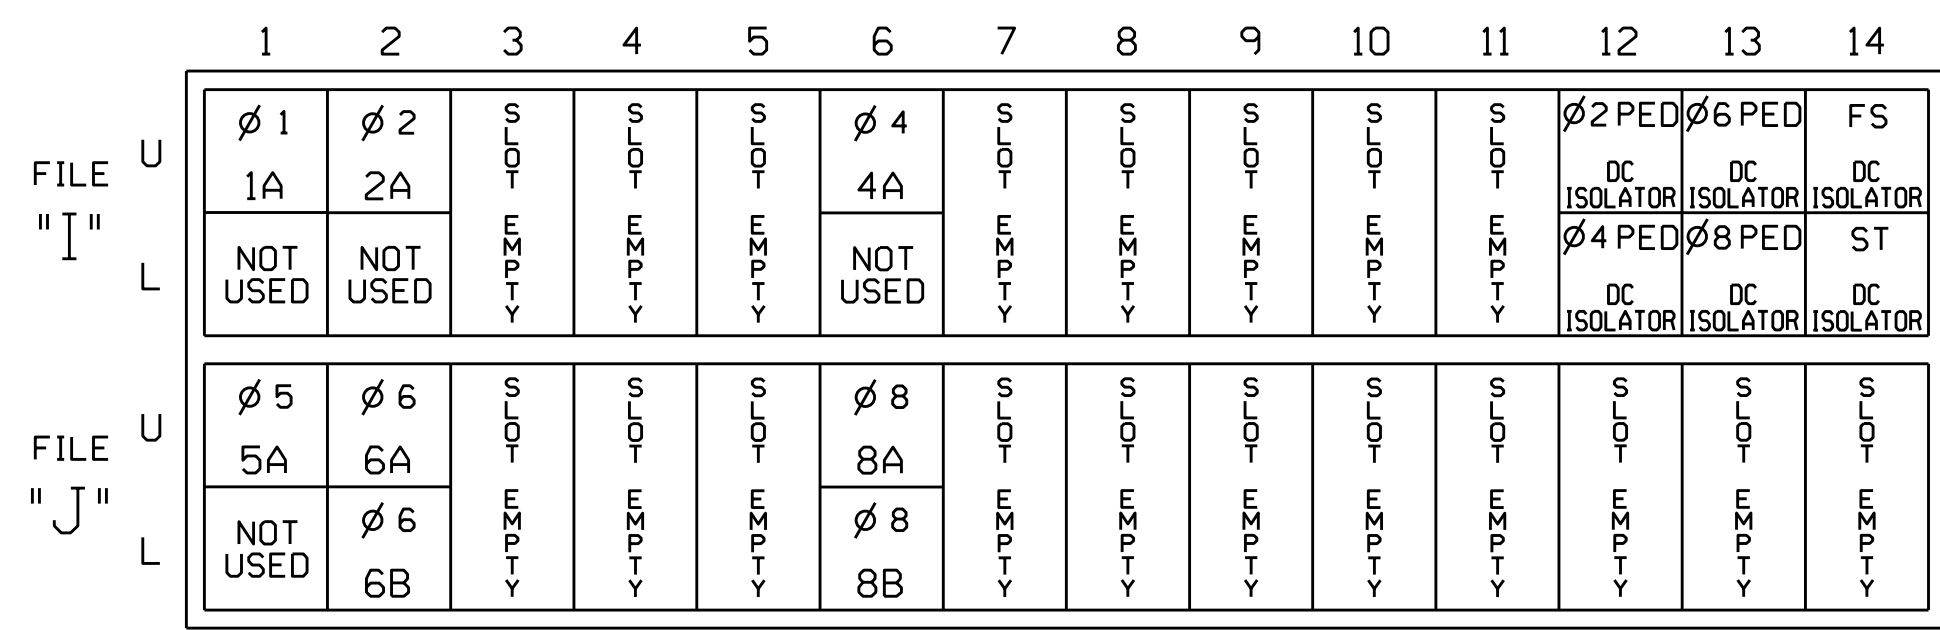


EX.: 1A, 2A, ETC. = LOOP NO.'S
 FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT POINT	DETECTOR NO.	CALL PHASE	DELAY TIME	EXTEND TIME	EXTEND	ADDED INITIAL	CALL	DELAY DURING GREEN
1A	TB2-1,2	I1U	56	18	1	1	15		X		X	
2A	TB2-5,6	I2U	39	1	2	2			X		X	
4A	TB4-9,10	I6U	41	3	8	4	10		X		X	
5A	TB3-1,2	J1U	55	17	15	5	15		X		X	
6A	TB3-5,6	J2U	40	2	16	6			X		X	
8A	TB5-9,10	J6U	42	4	22	8	3		X		X	
8B	TB5-11,12	J6L	46	8	23	8	10		X		X	
PED PUSH BUTTONS												
P21,P22	TB8-4,6	I12U	67	33	2	PED 2						
P41,P42	TB8-5,6	I12L	69	35	4	PED 4						
P61,P62	TB8-7,9	I13U	68	34	6	PED 6						
P81,P82	TB8-8,9	I13L	70	36	8	PED 8						


NOTE: INSTALL DC ISOLATORS IN INPUT FILE SLOTS I12 AND I13.



LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

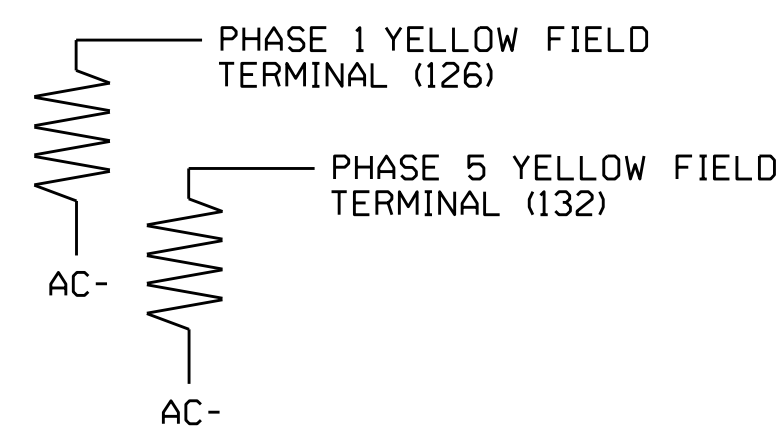


COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

FYA SIGNAL WIRING DETAIL


(wire signal heads as shown)

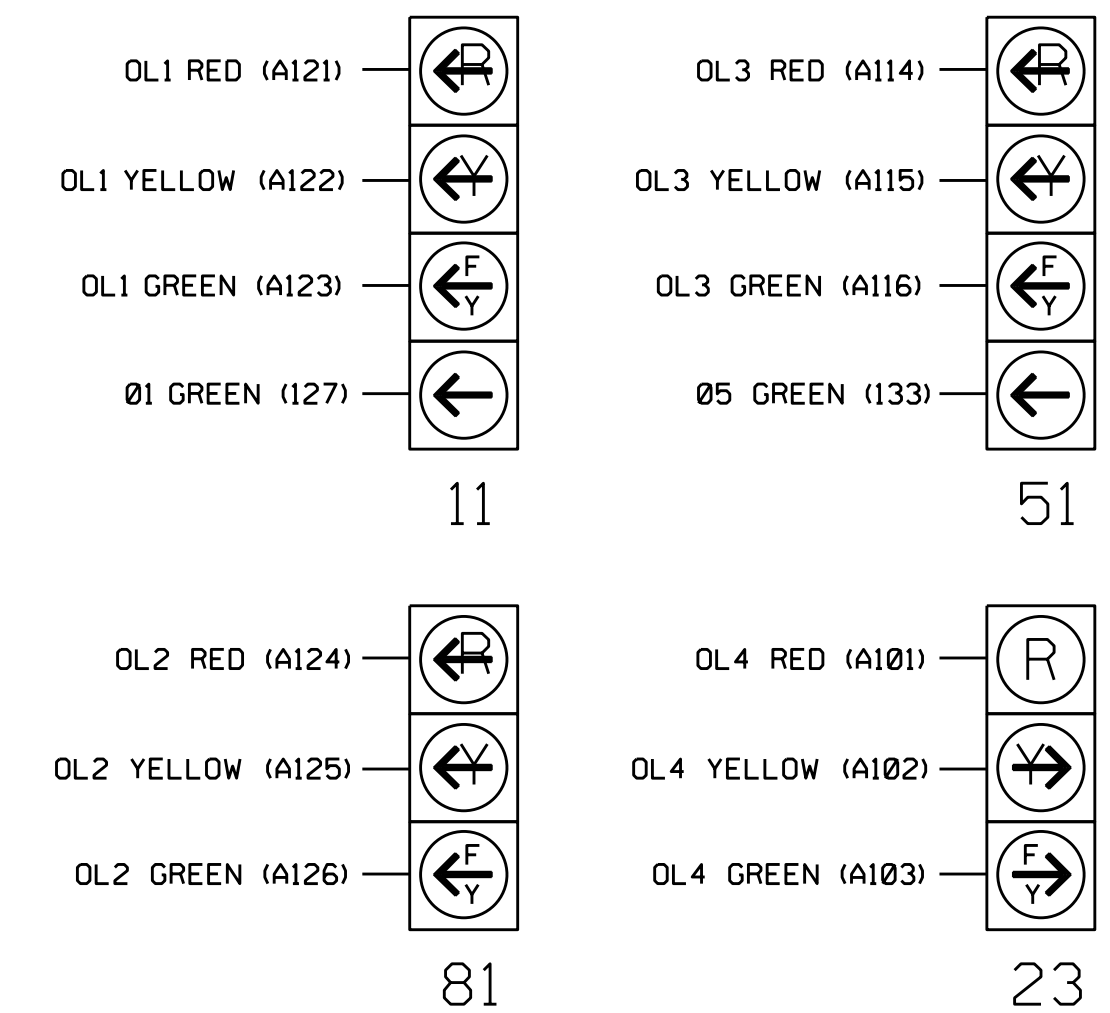

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 10-2462
 DESIGNED: February 2024
 SEALED: 6/7/2024
 REVISED: N/A

This Plan Supersedes Electrical Detail Sealed on 2/20/2023

Electrical Detail - Sheet 1 of 3



SR 1009 (East John Street) at Greylock Ridge Road
 Division 10 Mecklenburg County Matthews
 PLAN DATE: June 2024 REVIEWED BY:
 PREPARED BY: Zarrar Zafar REVIEWED BY:
 REVISIONS INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Seal of Todd Joyce, Professional Engineer, License No. 031001, State of North Carolina.