PROJECT REFERENCE NO.	SHEET NO.
B-6051/U-6143	Sig. 4.1

18 CHANNEL IP CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

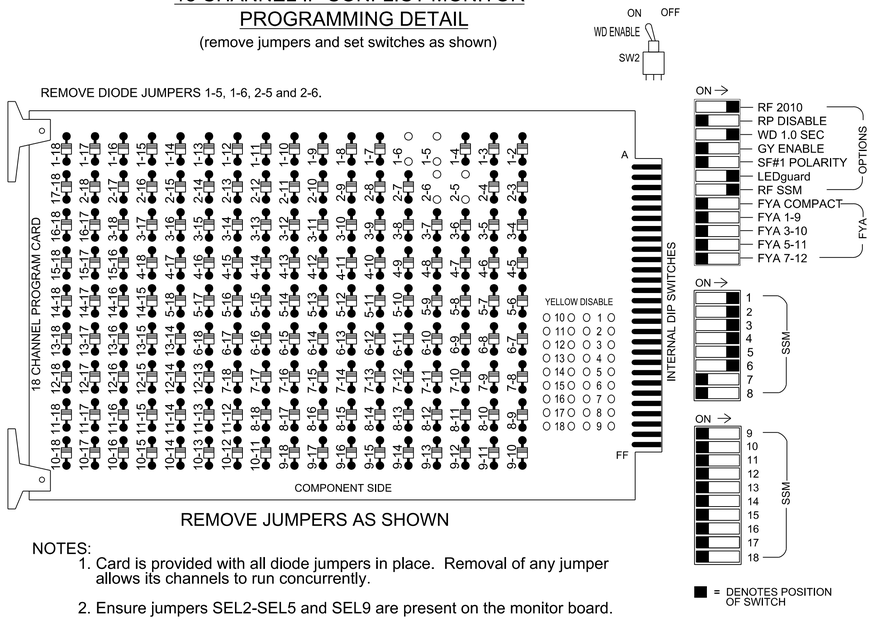

REMOVE JUMPERS AS SHOWN

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program controller to start up in phase 2 Green No Walk and 6 Green No Walk.
3. If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
4. The cabinet and controller are part of the Belmont Signal System.

EQUIPMENT INFORMATION

Controller.....2070LX
Cabinet.....332 w/ Aux
Software.....Q-Free MAXTIME
Cabinet Mount.....Base
Output File Positions.....18 With Aux. Output File
Load Switches Used.....S1, S2, S4, S5, S7, S8
Phases Used.....1, 2, 3, 4, 5, 6
Overlap "1".....NOT USED
Overlap "2".....NOT USED
Overlap "3".....NOT USED
Overlap "4".....NOT USED

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1		S2	S3	S4		S5		S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1		2	13	3		4		14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1		2	2 PED	3		4		4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	SPARE	OL3	OL4	SPARE
SIGNAL HEAD NO.	11	32	21,22, 23	NU	31	32	41	42	NU	51	61,62	NU	NU	NU	NU	NU	NU	NU	NU	NU	NU
RED	·		128	·	116	116	101	101	·	·	134	·	·	·	·	·	·	·	·	·	·
YELLOW	·		129	·	117	117	102	102	·	·	135	·	·	·	·	·	·	·	·	·	·
GREEN	·		130	·	118	118	103	103	·	·	136	·	·	·	·	·	·	·	·	·	·
RED ARROW	125		·	·	·		·		·	131	·	·	·	·	·	·	·	·	·	·	·
YELLOW ARROW	126	126	·	·	·		·		·	132	·	·	·	·	·	·	·	·	·	·	·
GREEN ARROW	127	127	·	·	118		103		·	133	·	·	·	·	·	·	·	·	·	·	·

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

		1	2	3	4	5	6	7	8	9	1O	11	12	13	14
FILE "I"	U	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	FS DC ISOLATOR
	L														ST DC ISOLATOR
FILE "J"	U	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY
	L														

EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown)

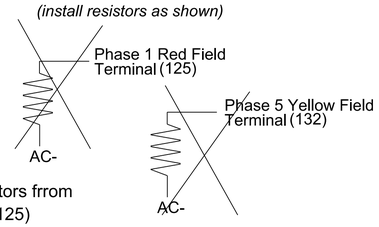

ACCEPTABLE VALUES	
Value (ohms)	Wattage
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

! If present, remove load resistors frrom Phase 1 Red Field Terminal (125) and from Phase 5 Yellow Field Terminal (132)

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection for zones 1A, 1B, 1C, 2A, 2B, 2C, 2D, 2E, 2F, 3A, 4A, 4B, 5A, 6A, 6B, 6C, and 6D. Perform installation according to manufacturer's directions and NCDOT engineer -approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 12-0997T3
DESIGNED: August 2025
SEALED: 8/1/2025
REVISED: N/A

Signal Upgrade - Temporary Design 3 - TMP Phase II Steps 1-2
Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

RK&K
P: (919) 878-9560
8601 Six Forks Road Suite 700 | Raleigh, North Carolina 27615-2965
NC License No. F-0112
Engineers | Construction Managers | Planners | Scientists
www.rkk.com
Responsive People | Creative Solutions

Electrical and Programming Details For:

Prepared for the Offices of:

Transportation Mobility and Safety Division, Traffic Engineering & Signals Management Section, State of North Carolina, Department of Transportation

750 N. Greenfield Pkwy, Garner, NC 27529

US 29-74 (Wilkinson Blvd)
at
NC 7 (Catawba St)/
SR 2083 (Hazeleen Avenue)

Division 12 Gaston County Belmont

PLAN DATE:	August 2025	REVIEWED BY:	CB Holden
PREPARED BY:	WP Erickson-Jones	REVIEWED BY:	DT Sears

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 044558 ENGINEER DAVID T. SEARS

DocuSigned by: David T Sears 069183F28E5741E...
8/1/2025
DATE

SIG. INVENTORY NO. 12-0997T3

8/1/2025
R:\Traffic\Signals\Designs\Signals\B-6051_Signal_12-0997ET3_dsn.dgn
dsears