

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

CALDWELL COUNTY
U-4700CB

INDEX OF SHEETS

DESCRIPTION	SHEET NO.
INDEX OF SHEETS	X-1
XSC SUMMARY	X-1A
-L-	X-2 TO X-14
-Y38SW-	X-15 TO X-16
-Y38NE-	X-17 TO X-18

8/17/99

6/22/2026 4:27:23 PM
X:\XSC\14700CB-RDY_XSC_1A.dgn
User: jrcm

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

PROJECT REFERENCE NO.	SHEET NO.
U-4700CB	X-1A

NOTE: EMBANKMENT COLUMN DOES NOT INCLUDE BACKFILL FOR UNDERCUT

CROSS-SECTION SUMMARY

Station	Uncl. Exc.	Embt	Undercut	Station	Uncl. Exc.	Embt
-L- LT	(cu. yd.)	(cu. yd.)	(cu. yd.)	-L- LT	(cu. yd.)	(cu. yd.)
593+50.00	0	0		620+00.00	939	31
594+00.00	286	13		620+50.00	1019	27
594+50.00	93	18		621+00.00	946	18
595+00.00	9	71		621+50.00	406	15
595+50.00	18	197		622+00.00	17	11
596+00.00	22	351				
596+50.00	20	486	78			
597+00.00	24	491	143			
597+50.00	71	359	95	Station	Uncl. Exc.	Embt
598+00.00	73	175	30	-Y38SW-	(cu. yd.)	(cu. yd.)
598+50.00	18	44		10+30.00	0	0
599+00.00	78	13		10+50.00	3	14
599+50.00	174	9		11+00.00	4	59
600+00.00	195	13		11+50.00	19	65
600+50.00	190	22		12+00.00	41	48
601+00.00	120	32		12+50.00	22	31
601+50.00	44	30		13+00.00	43	31
602+00.00	29	23		13+50.00	53	36
602+50.00	15	22				
603+00.00	1	45				
603+50.00	62	49				
604+00.00	63	25				
604+50.00	2	21				
605+00.00	14	17				
605+50.00	23	13				
606+00.00	21	35				
606+50.00	11	57				
607+00.00	0	54				
607+50.00	0	52				
608+00.00	6	111				
608+50.00	17	117				
609+00.00	56	59				
609+50.00	92	66				
610+00.00	62	84				
610+50.00	30	78				
611+00.00	25	71				
611+50.00	19	70				
612+00.00	13	64				
612+50.00	12	63				
613+00.00	10	63				
613+50.00	19	83				
614+00.00	29	103				
614+50.00	42	94				
615+00.00	35	96				
615+50.00	10	112				
616+00.00	2	126				
616+50.00	1	131				
617+00.00	4	108				
617+50.00	6	83				
618+00.00	42	76				
618+50.00	222	55				
619+00.00	592	31				
619+50.00	876	30				


Station	Uncl. Exc.	Embt	Undercut	Station	Uncl. Exc.	Embt	
-L- RT	(cu. yd.)	(cu. yd.)	(cu. yd.)	-L- RT	(cu. yd.)	(cu. yd.)	
593+50.00	0	0		620+00.00	472	25	
594+00.00	286	13		620+50.00	8	18	
594+50.00	93	18		621+00.00	12	10	
595+00.00	9	71		621+50.00	17	8	
595+50.00	18	197		622+00.00	19	7	
596+00.00	22	351					
596+50.00	20	486	213				
597+00.00	24	491	365	Station	Uncl. Exc.	Embt	Undercut
597+50.00	71	359	164	-Y38 NE-	(cu. yd.)	(cu. yd.)	(cu. yd.)
598+00.00	73	175	12	20+00.00	0	0	
598+50.00	18	44		20+50.00	0	227	
599+00.00	78	13		21+00.00	0	219	
599+50.00	174	9		21+50.00	0	169	
600+00.00	195	13		22+00.00	29	103	
600+50.00	190	22		22+50.00	95	79	
601+00.00	120	32		23+00.00	144	66	
601+50.00	44	30		23+50.00	149	50	
602+00.00	29	23		24+00.00	119	20	
602+50.00	15	22		24+50.00	181	35	97
603+00.00	1	45		25+00.00	85	40	200
603+50.00	62	49		25+50.00	84	45	103
604+00.00	63	25					
604+50.00	2	21					
605+00.00	14	17					
605+50.00	23	13					
606+00.00	21	35					
606+50.00	11	57					
607+00.00	0	54					
607+50.00	0	52					
608+00.00	6	111					
608+50.00	17	117					
609+00.00	56	59					
609+50.00	92	66					
610+00.00	62	81					
610+50.00	30	74					
611+00.00	13	132					
611+50.00	6	131					
612+00.00	13	64					
612+50.00	12	63					
613+00.00	10	63					
613+50.00	19	83					
614+00.00	29	103					
614+50.00	42	94					
615+00.00	35	96					
615+50.00	10	112					
616+00.00	2	126					
616+50.00	1	131					
617+00.00	4	108					
617+50.00	6	83					
618+00.00	5	71					
618+50.00	185	50					
619+00.00	592	31					
619+50.00	876	30					

Approximate quantities only. Unclassified Excavation, Borrow Excavation, Fine Grading, Clearing and Grubbing and Removal of Existing Asphalt Pavement will be paid for at the lump sum price for "Grading".


Quantities are approximate only. The Resident Engineer will recross-section the work accurately when the project is staked out. These cross-section notes will be used in computing the final quantities for which the contractor will be paid.


6/23/16

0 5 10	PROJ. REFERENCE NO.	SHEET NO.
■■■■■	U-4700CB	X-2

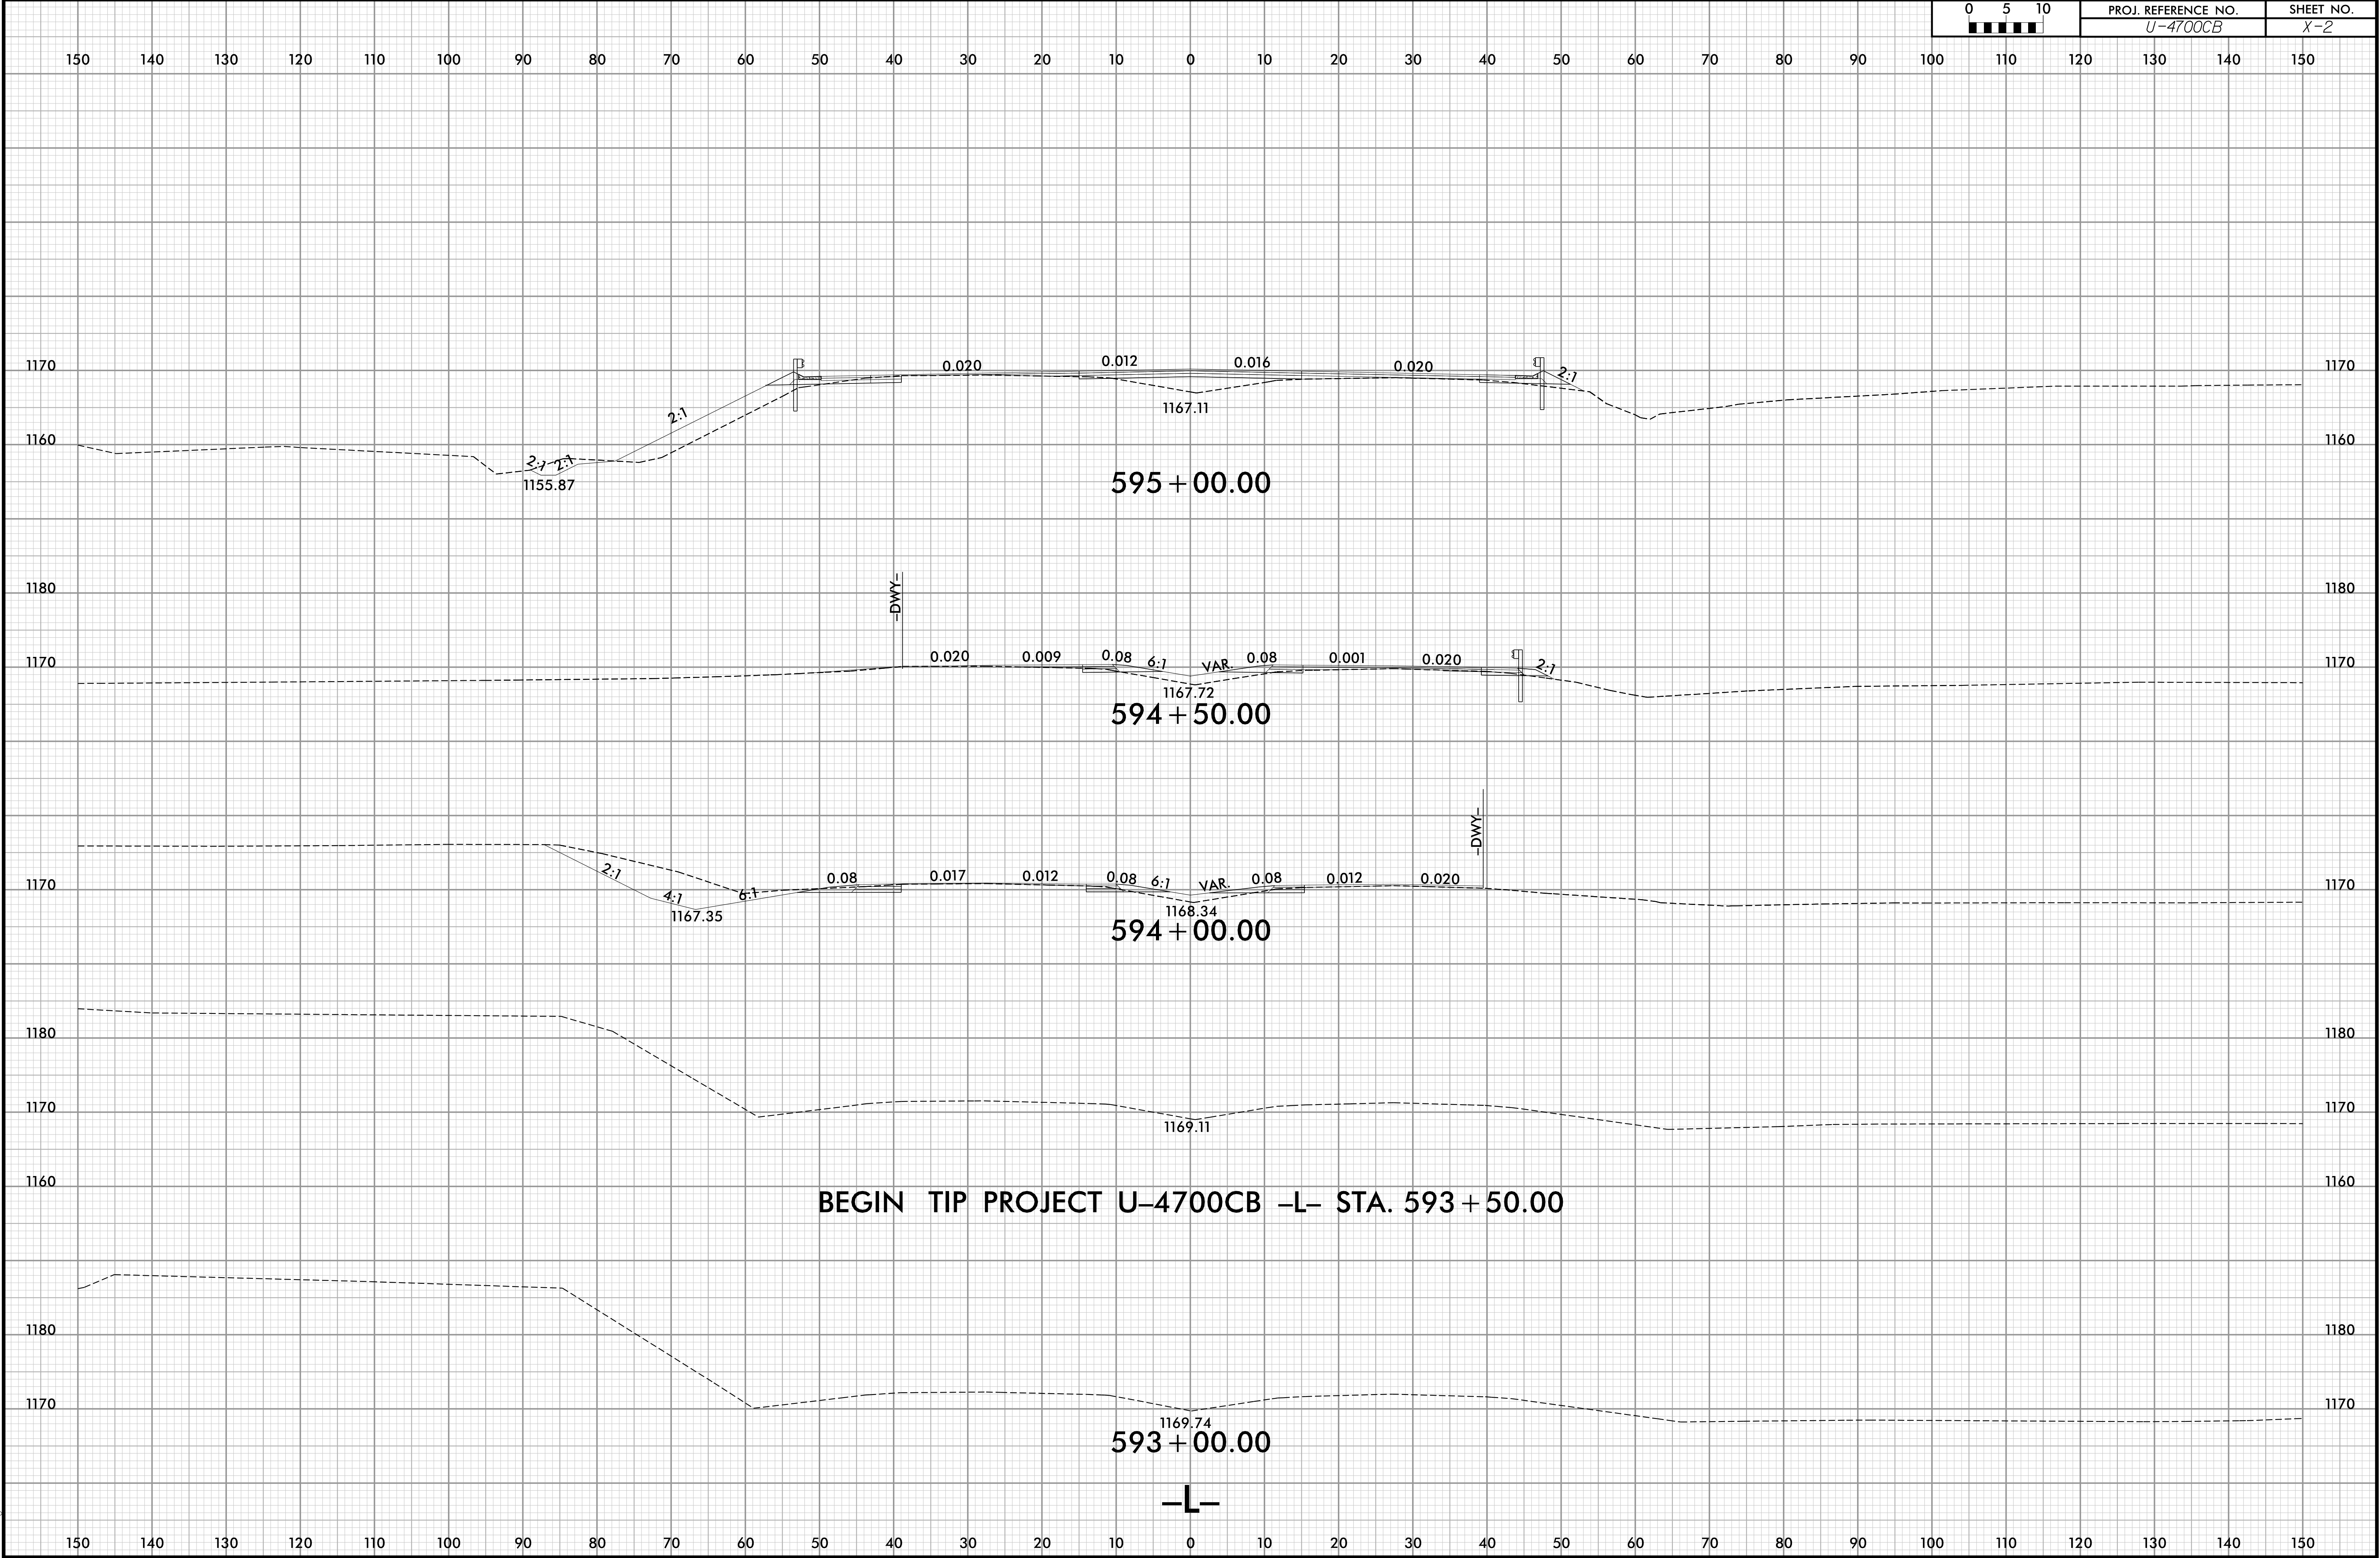


6/23/16

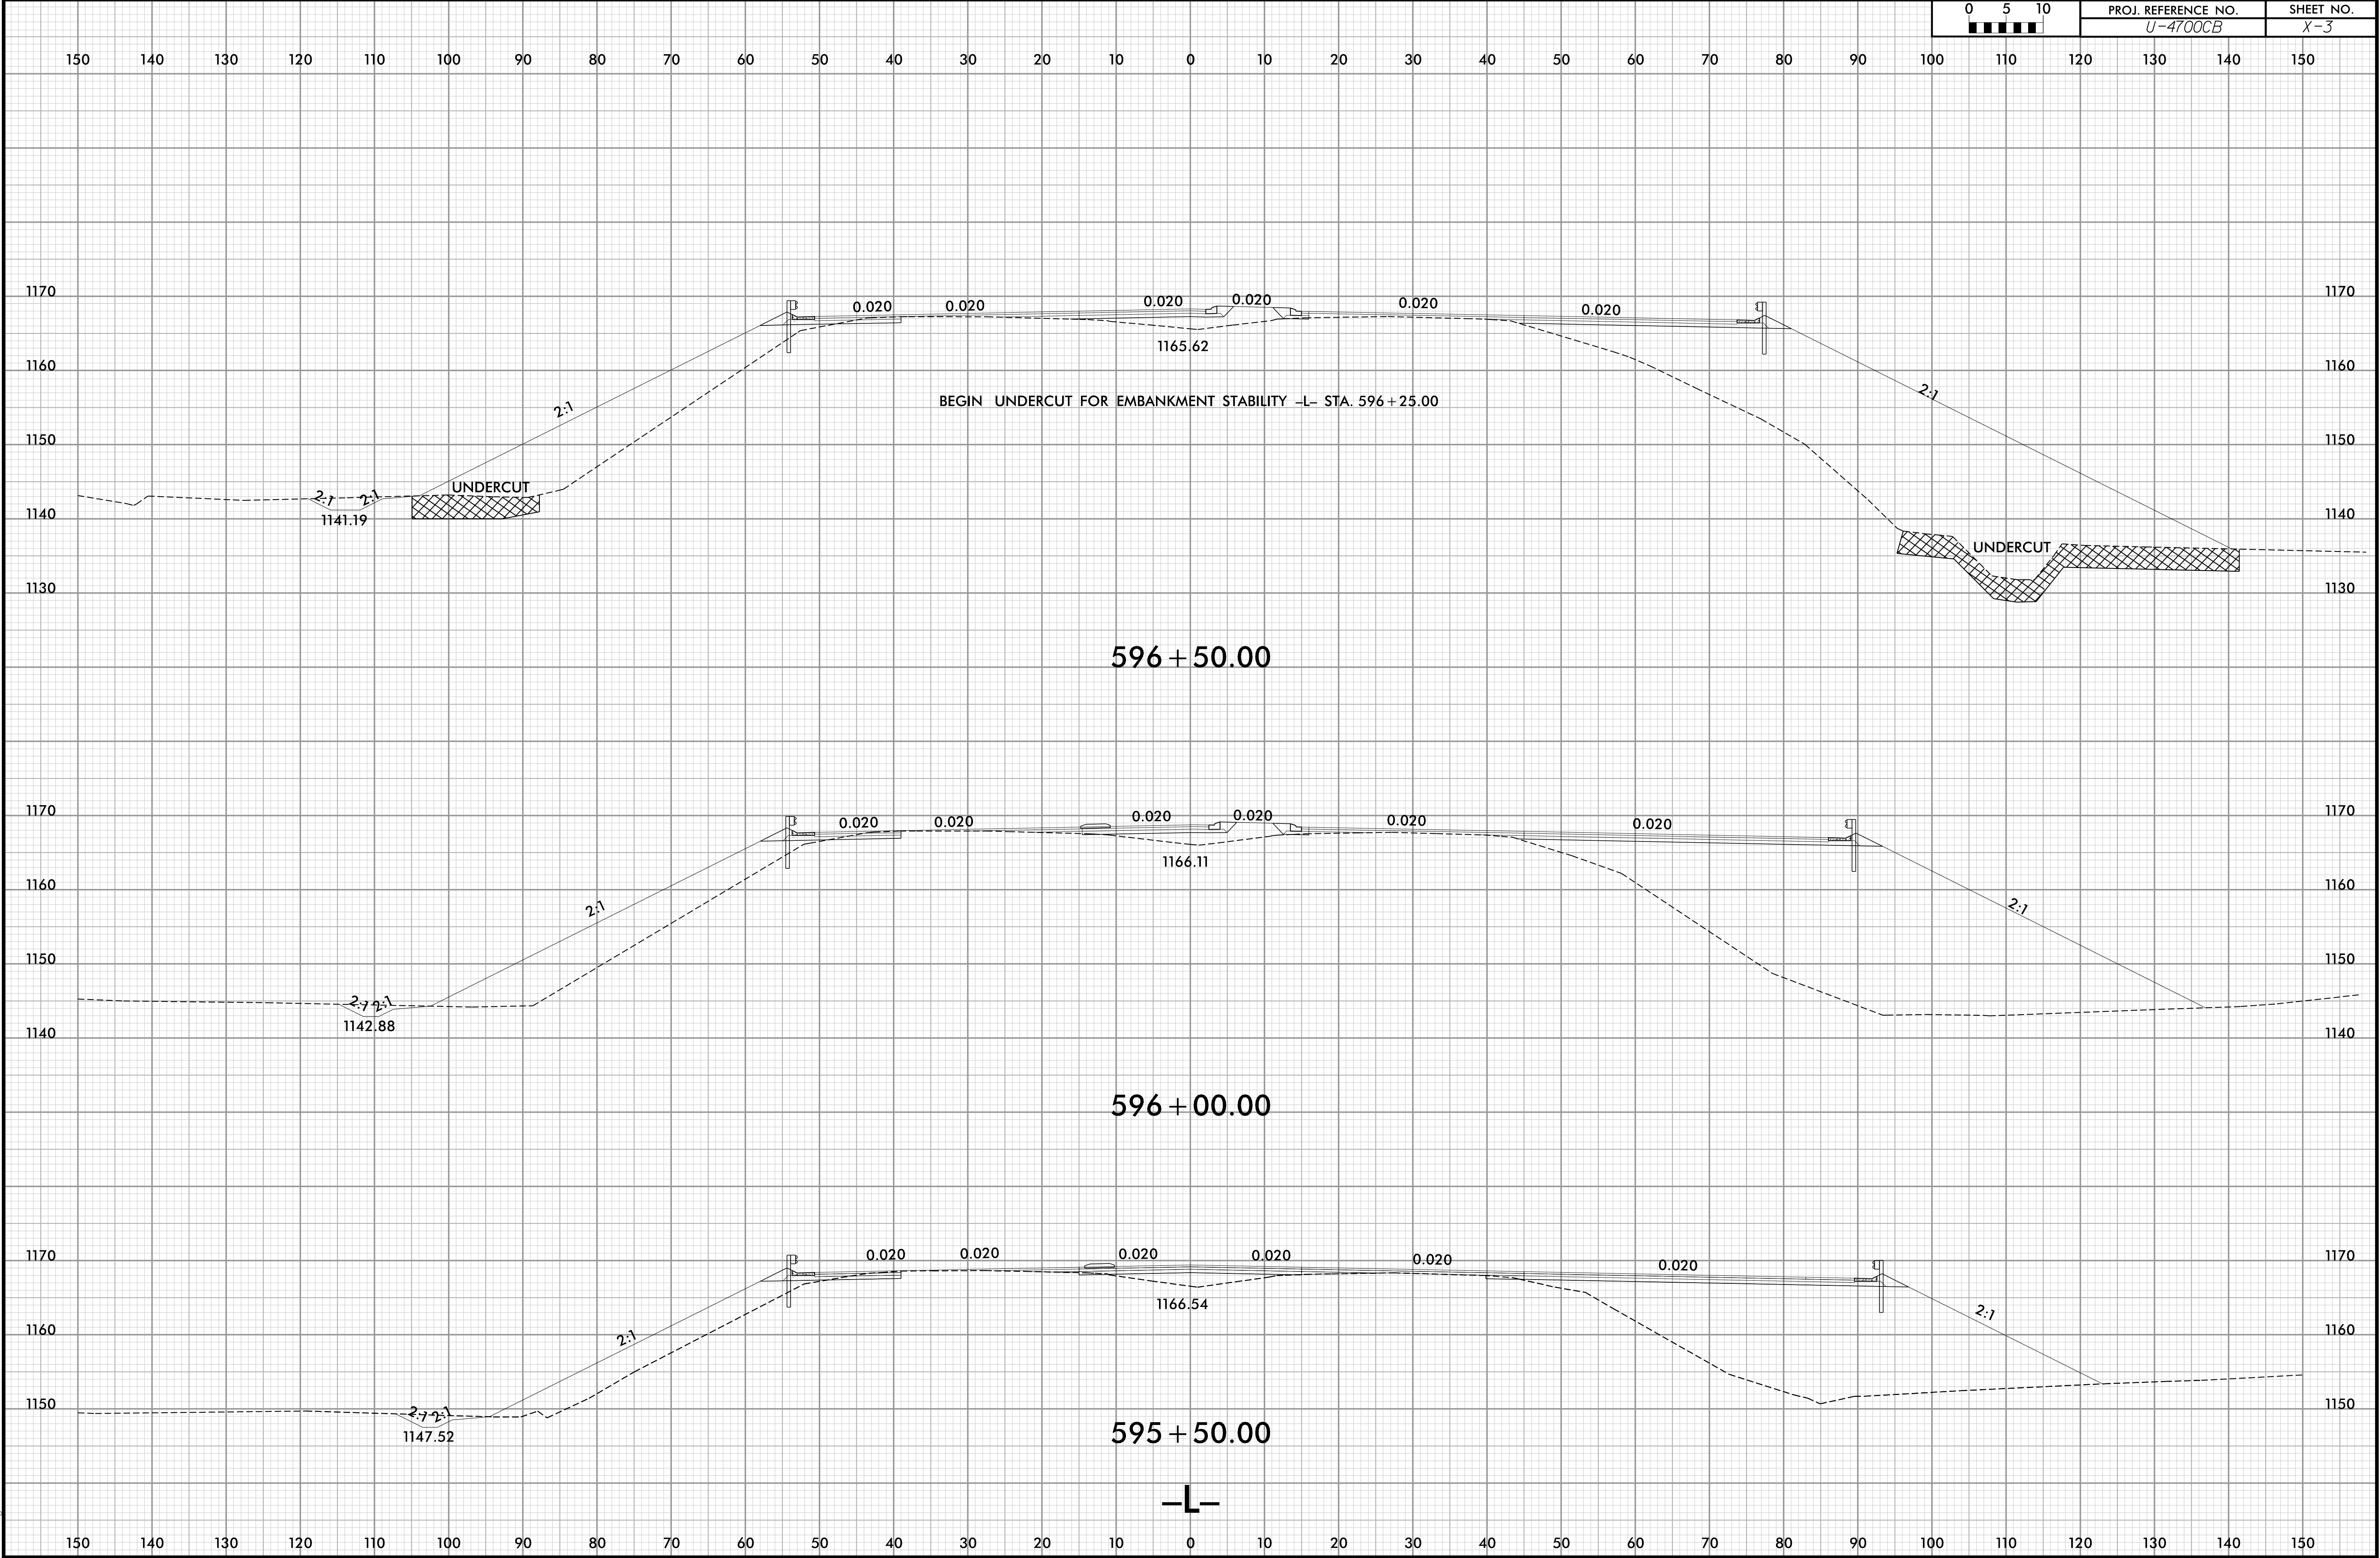

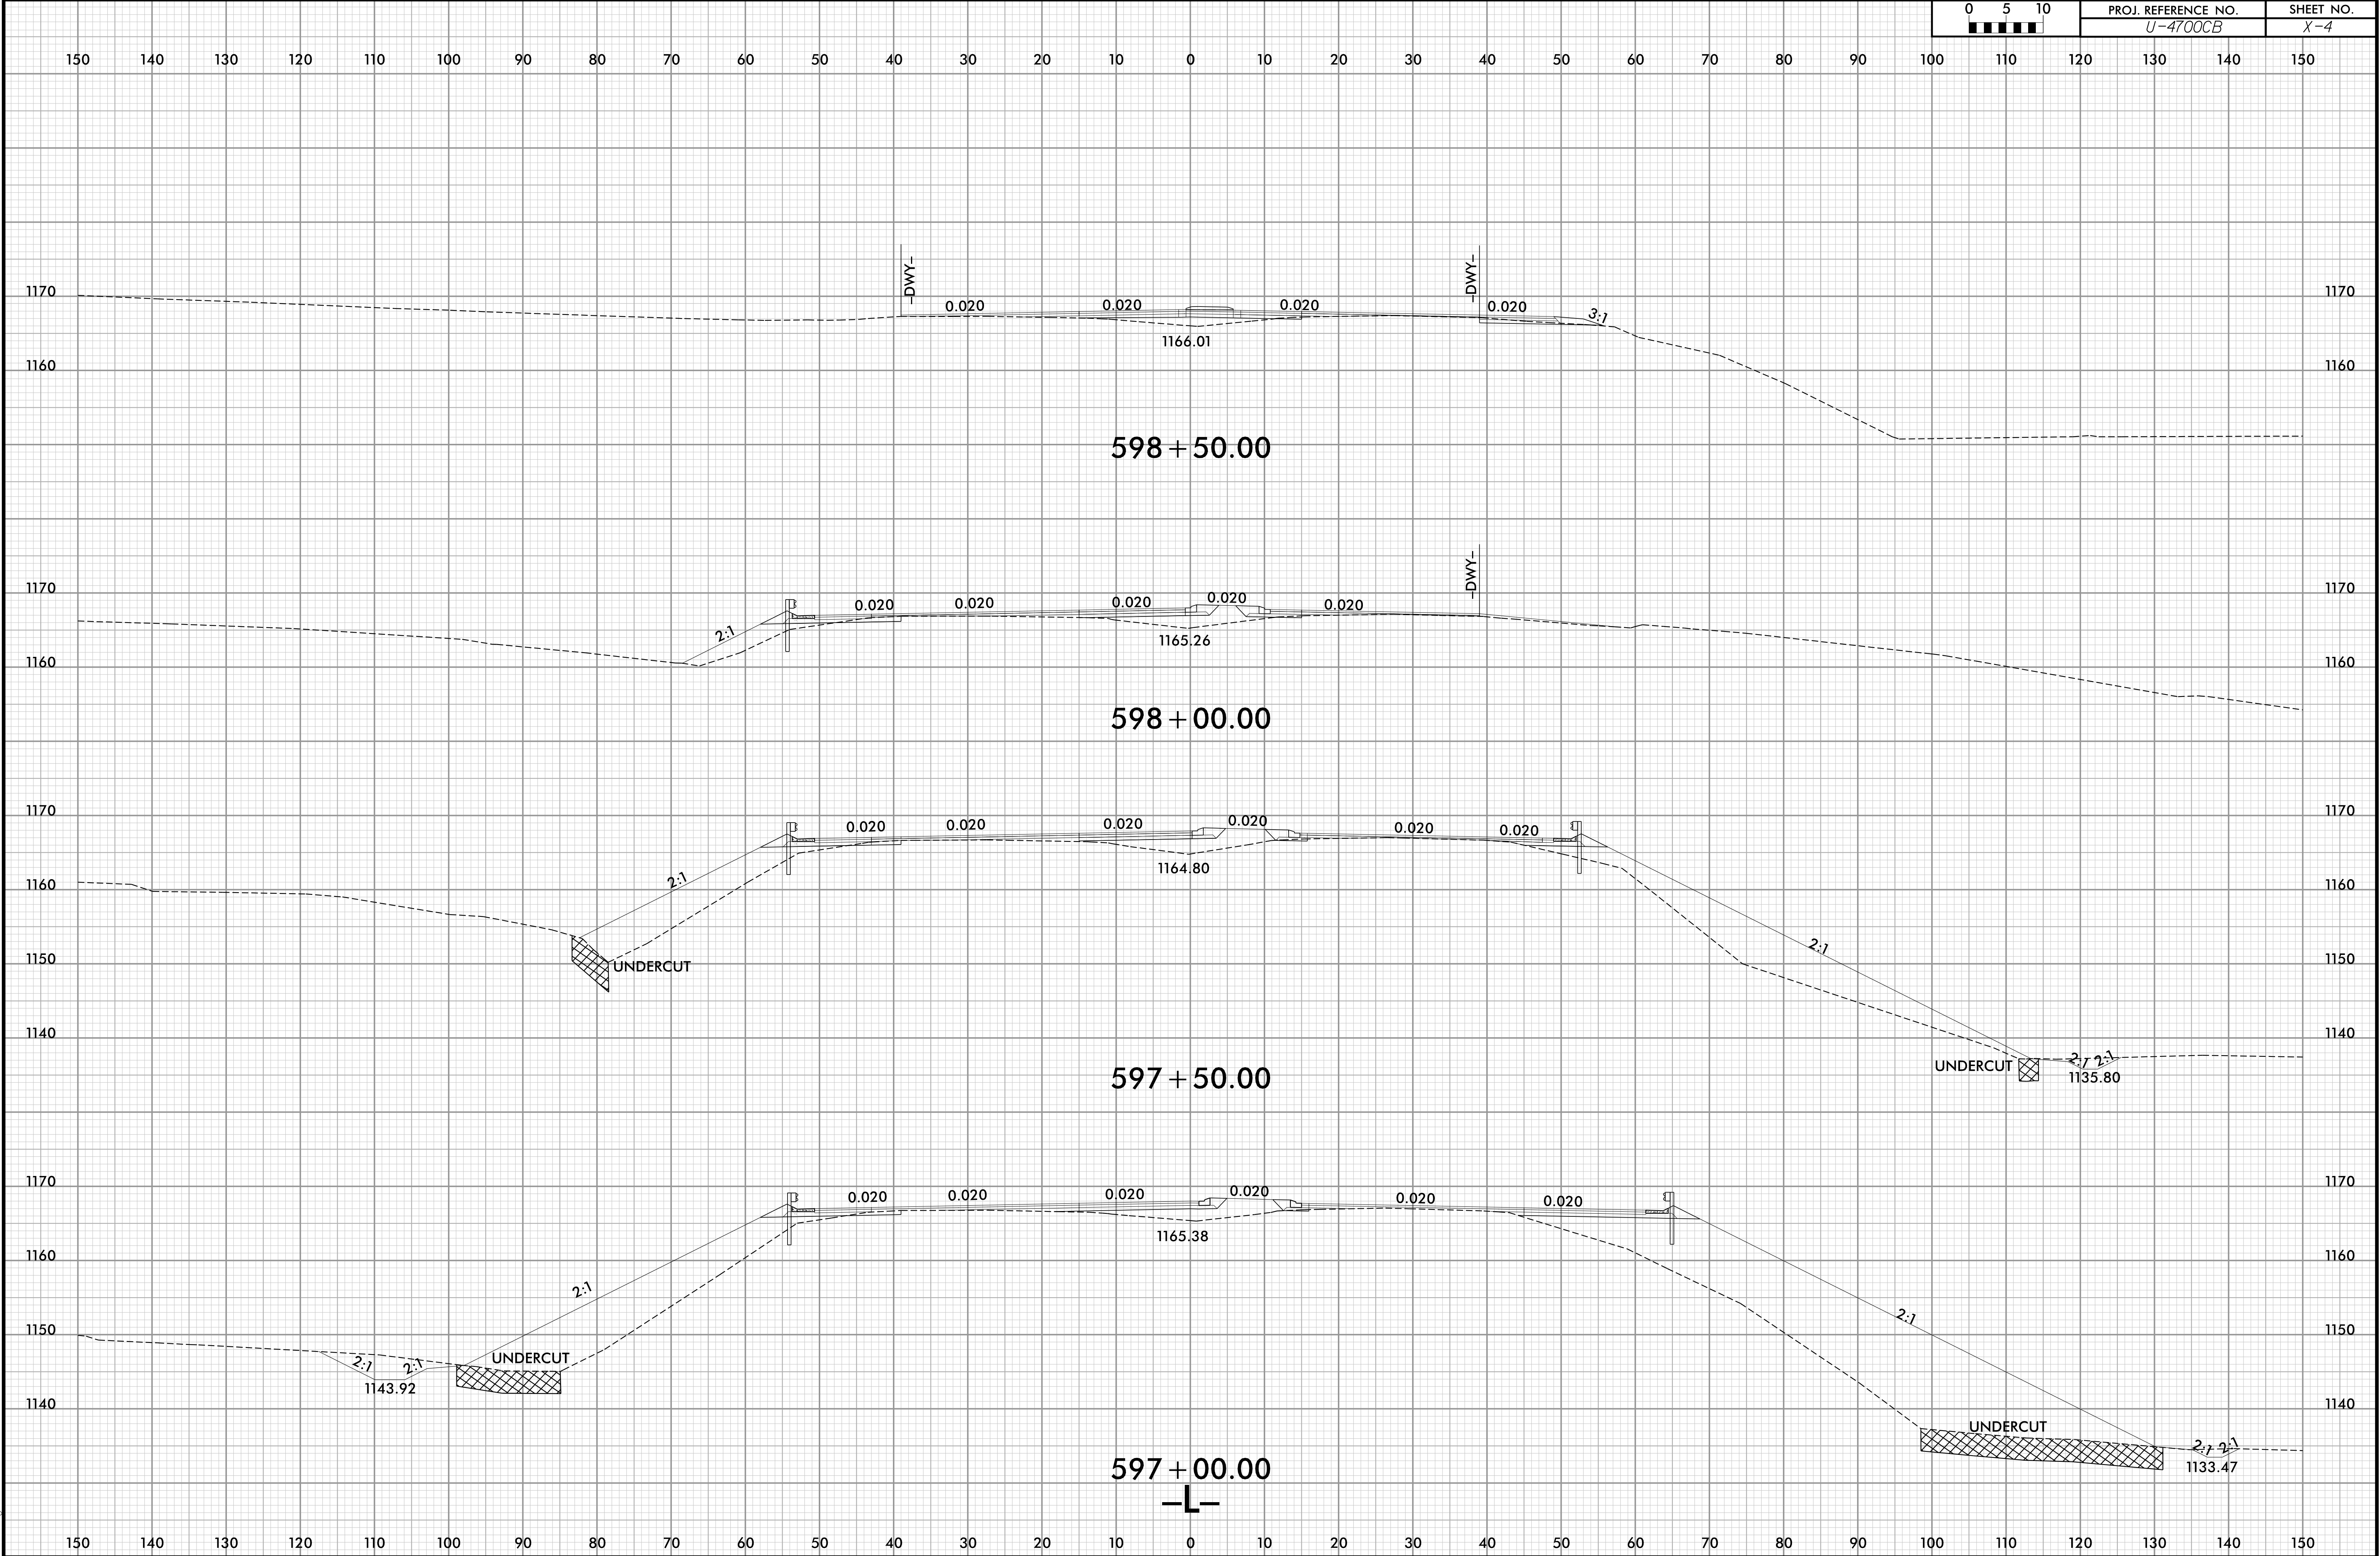


6/23/16


0	5	10	PROJ. REFERENCE NO.	SHEET NO.
■	■	■	U-4700CB	X-5

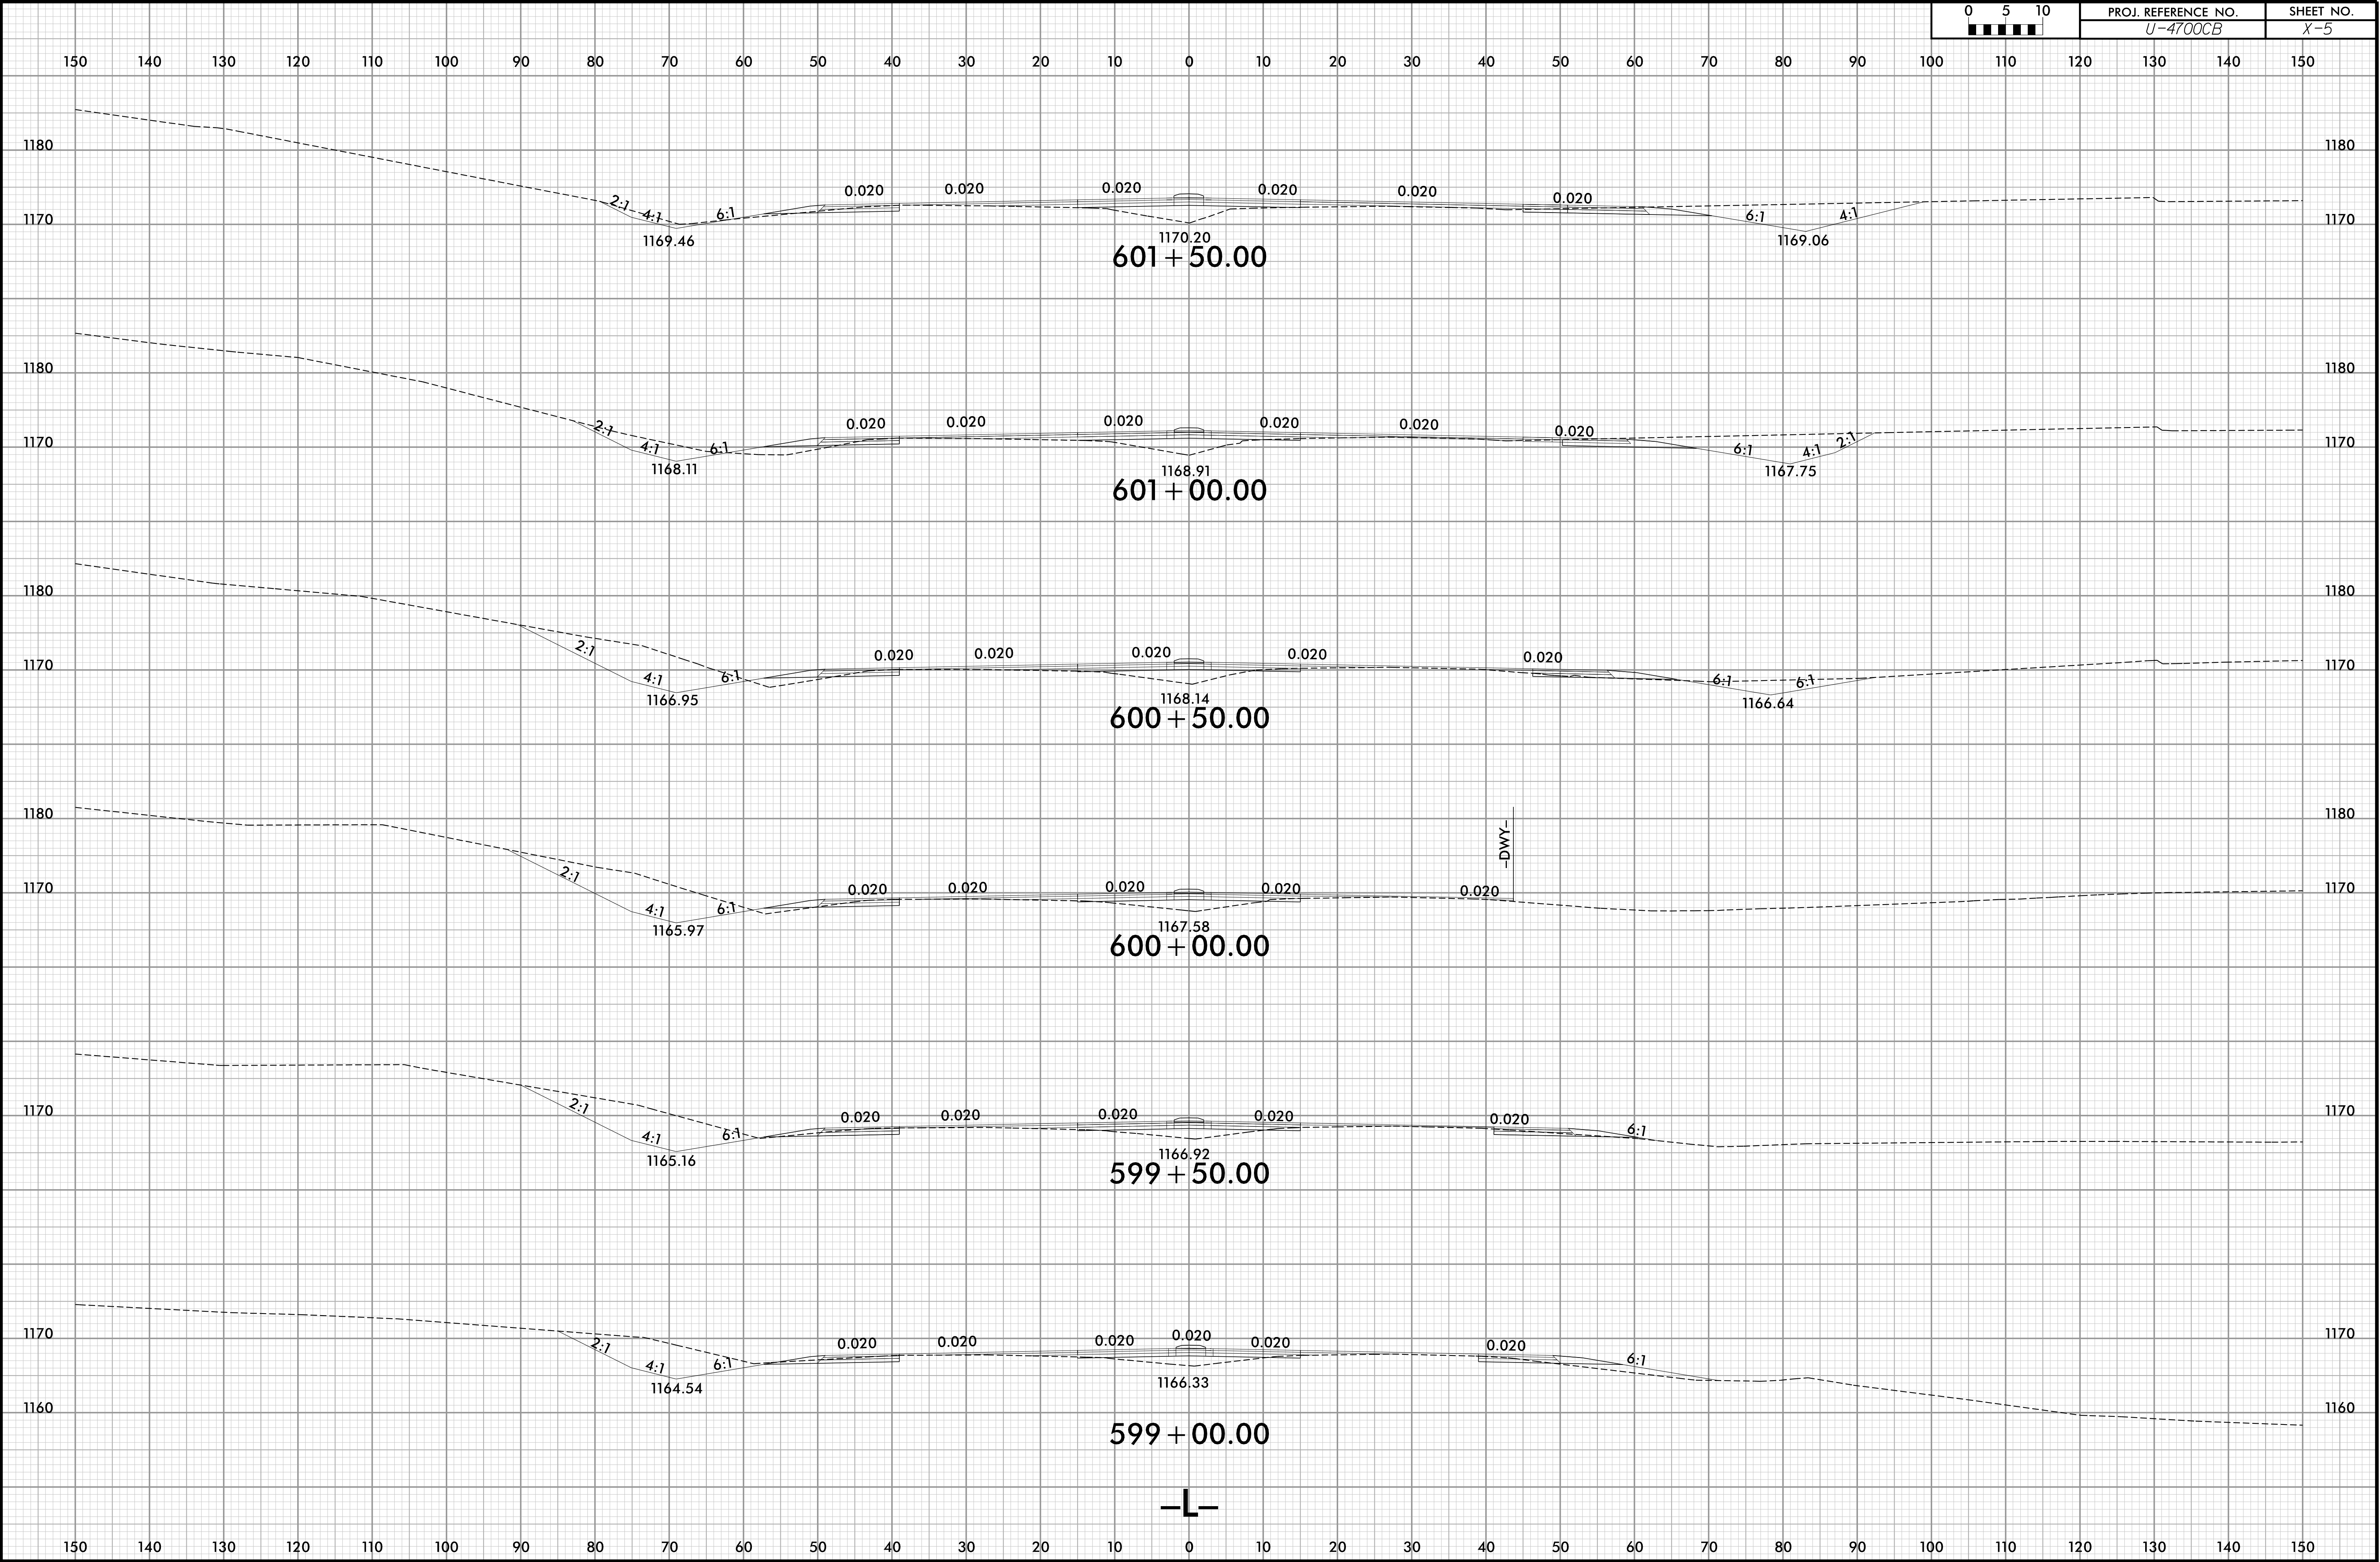


6/23/16

0 5 10	PROJ. REFERENCE NO.	SHEET NO.
	U-4700CB	X-6

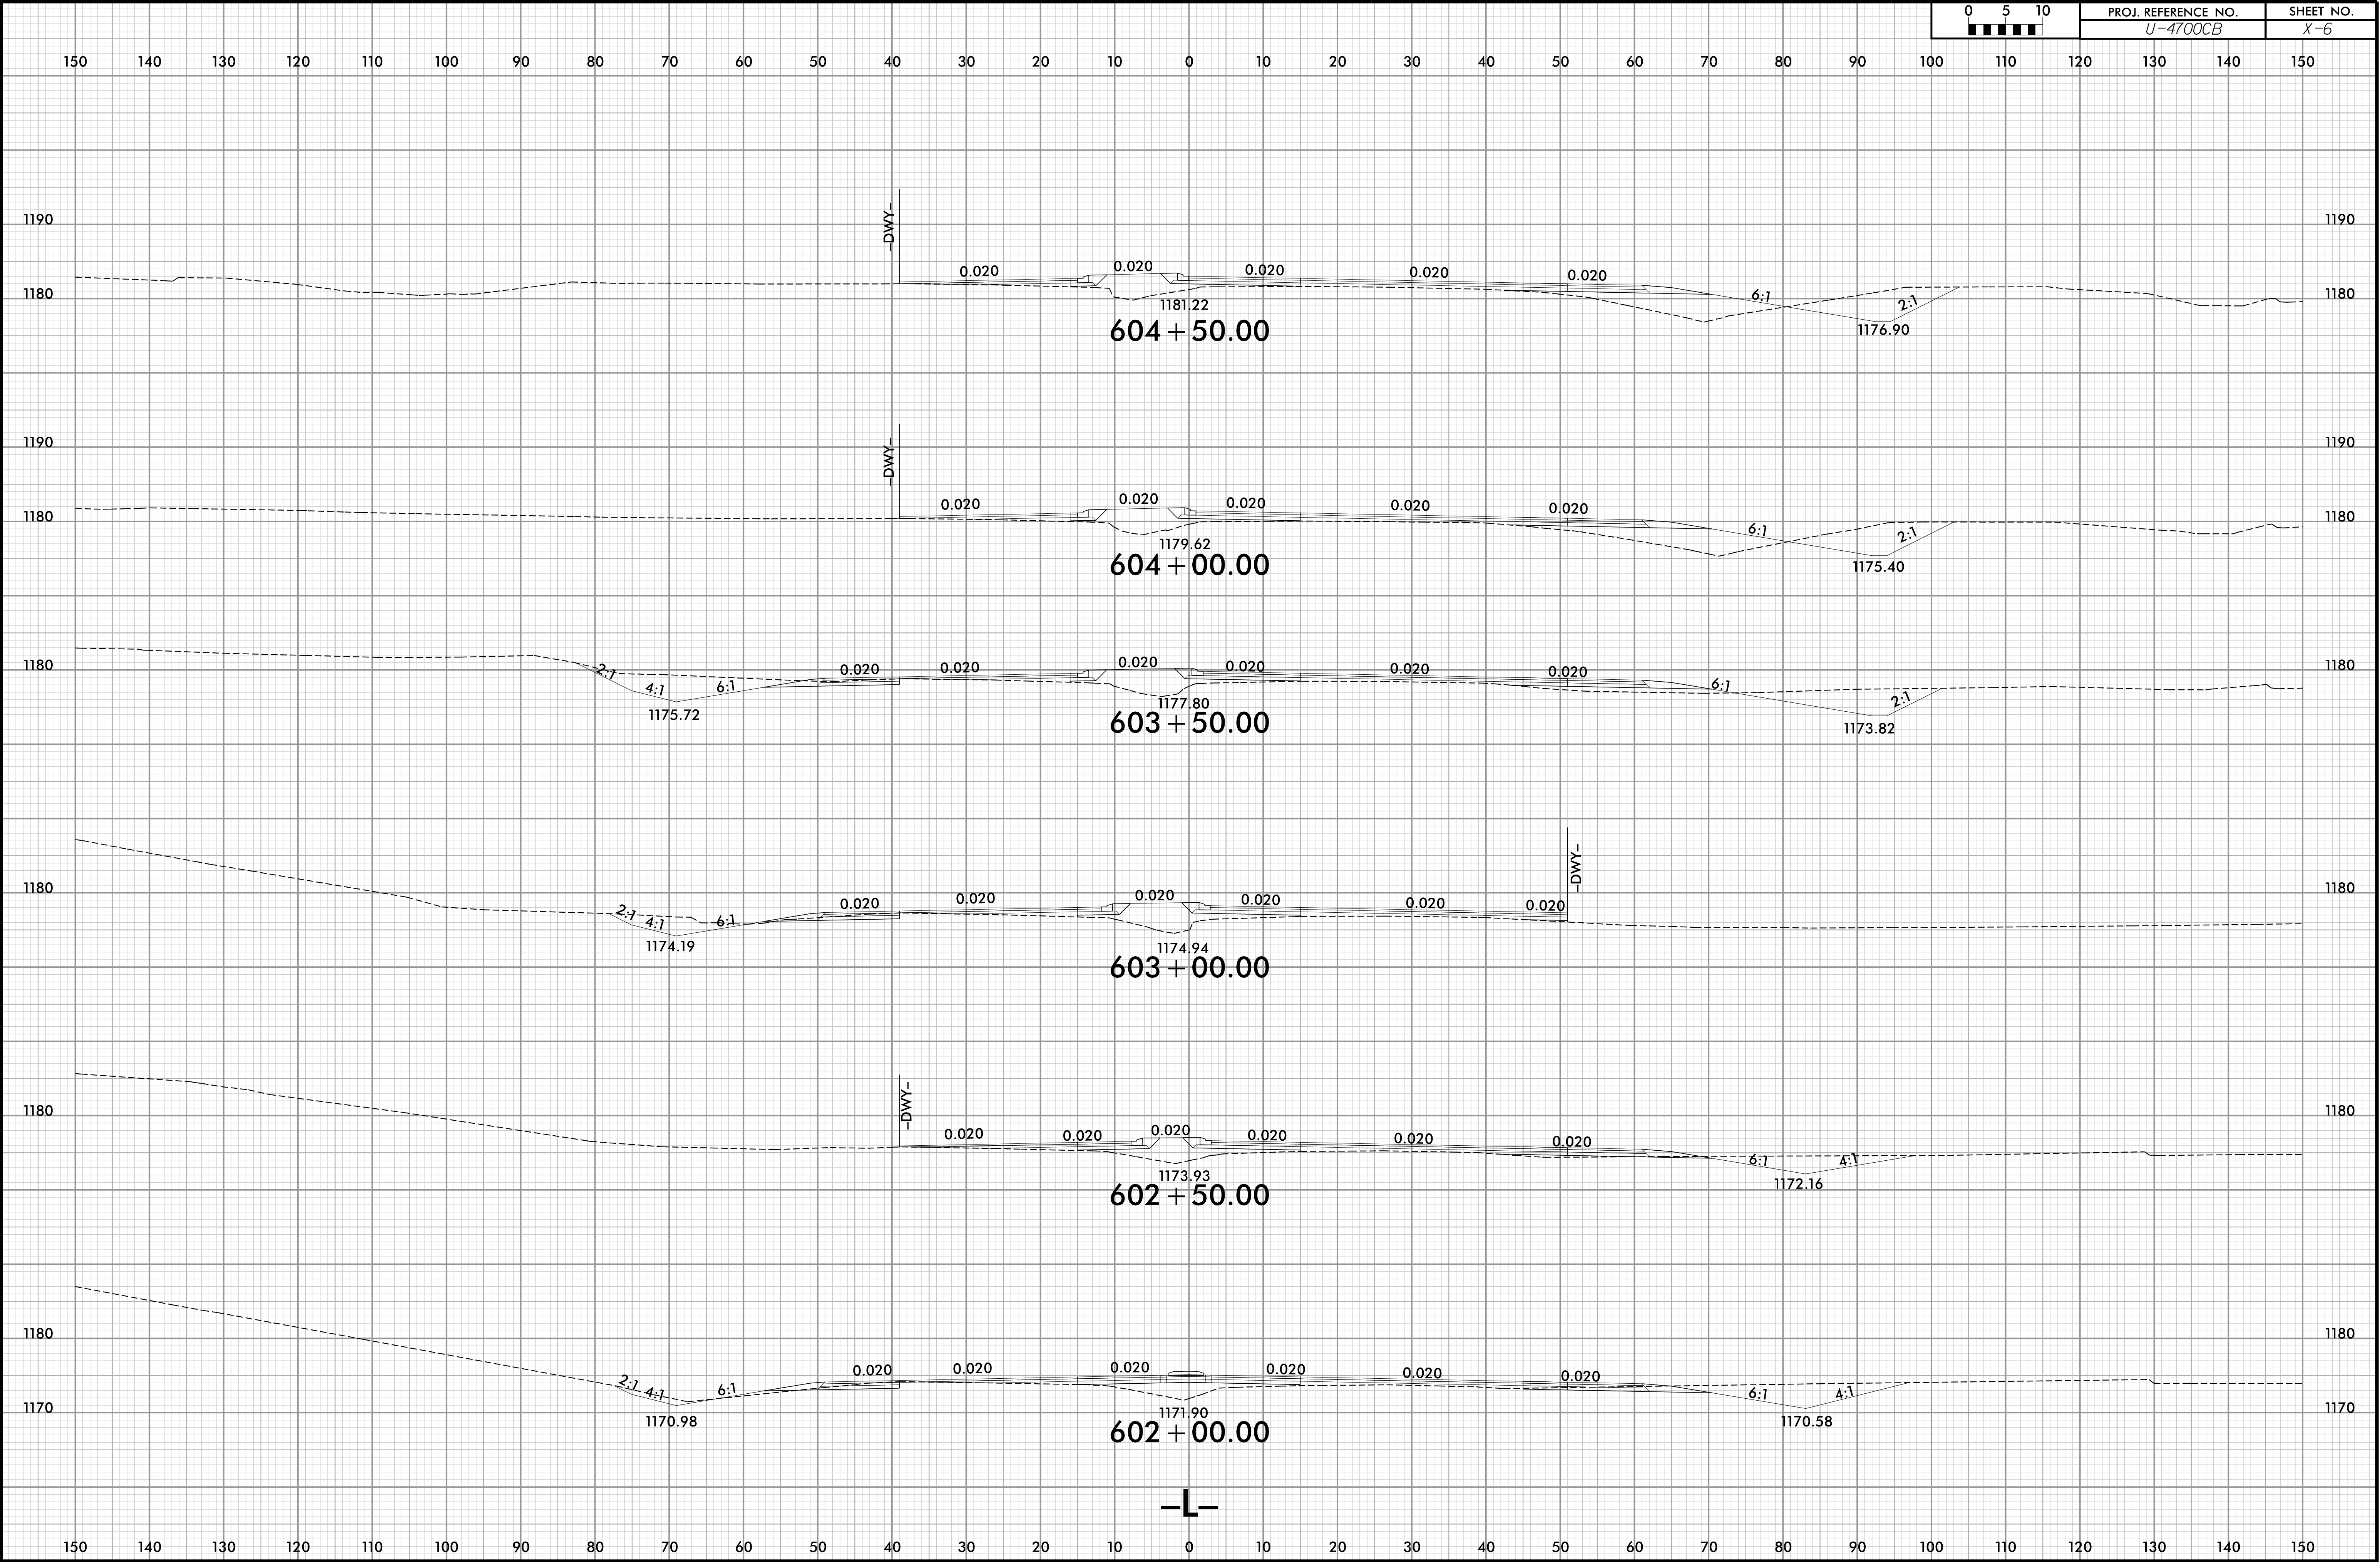

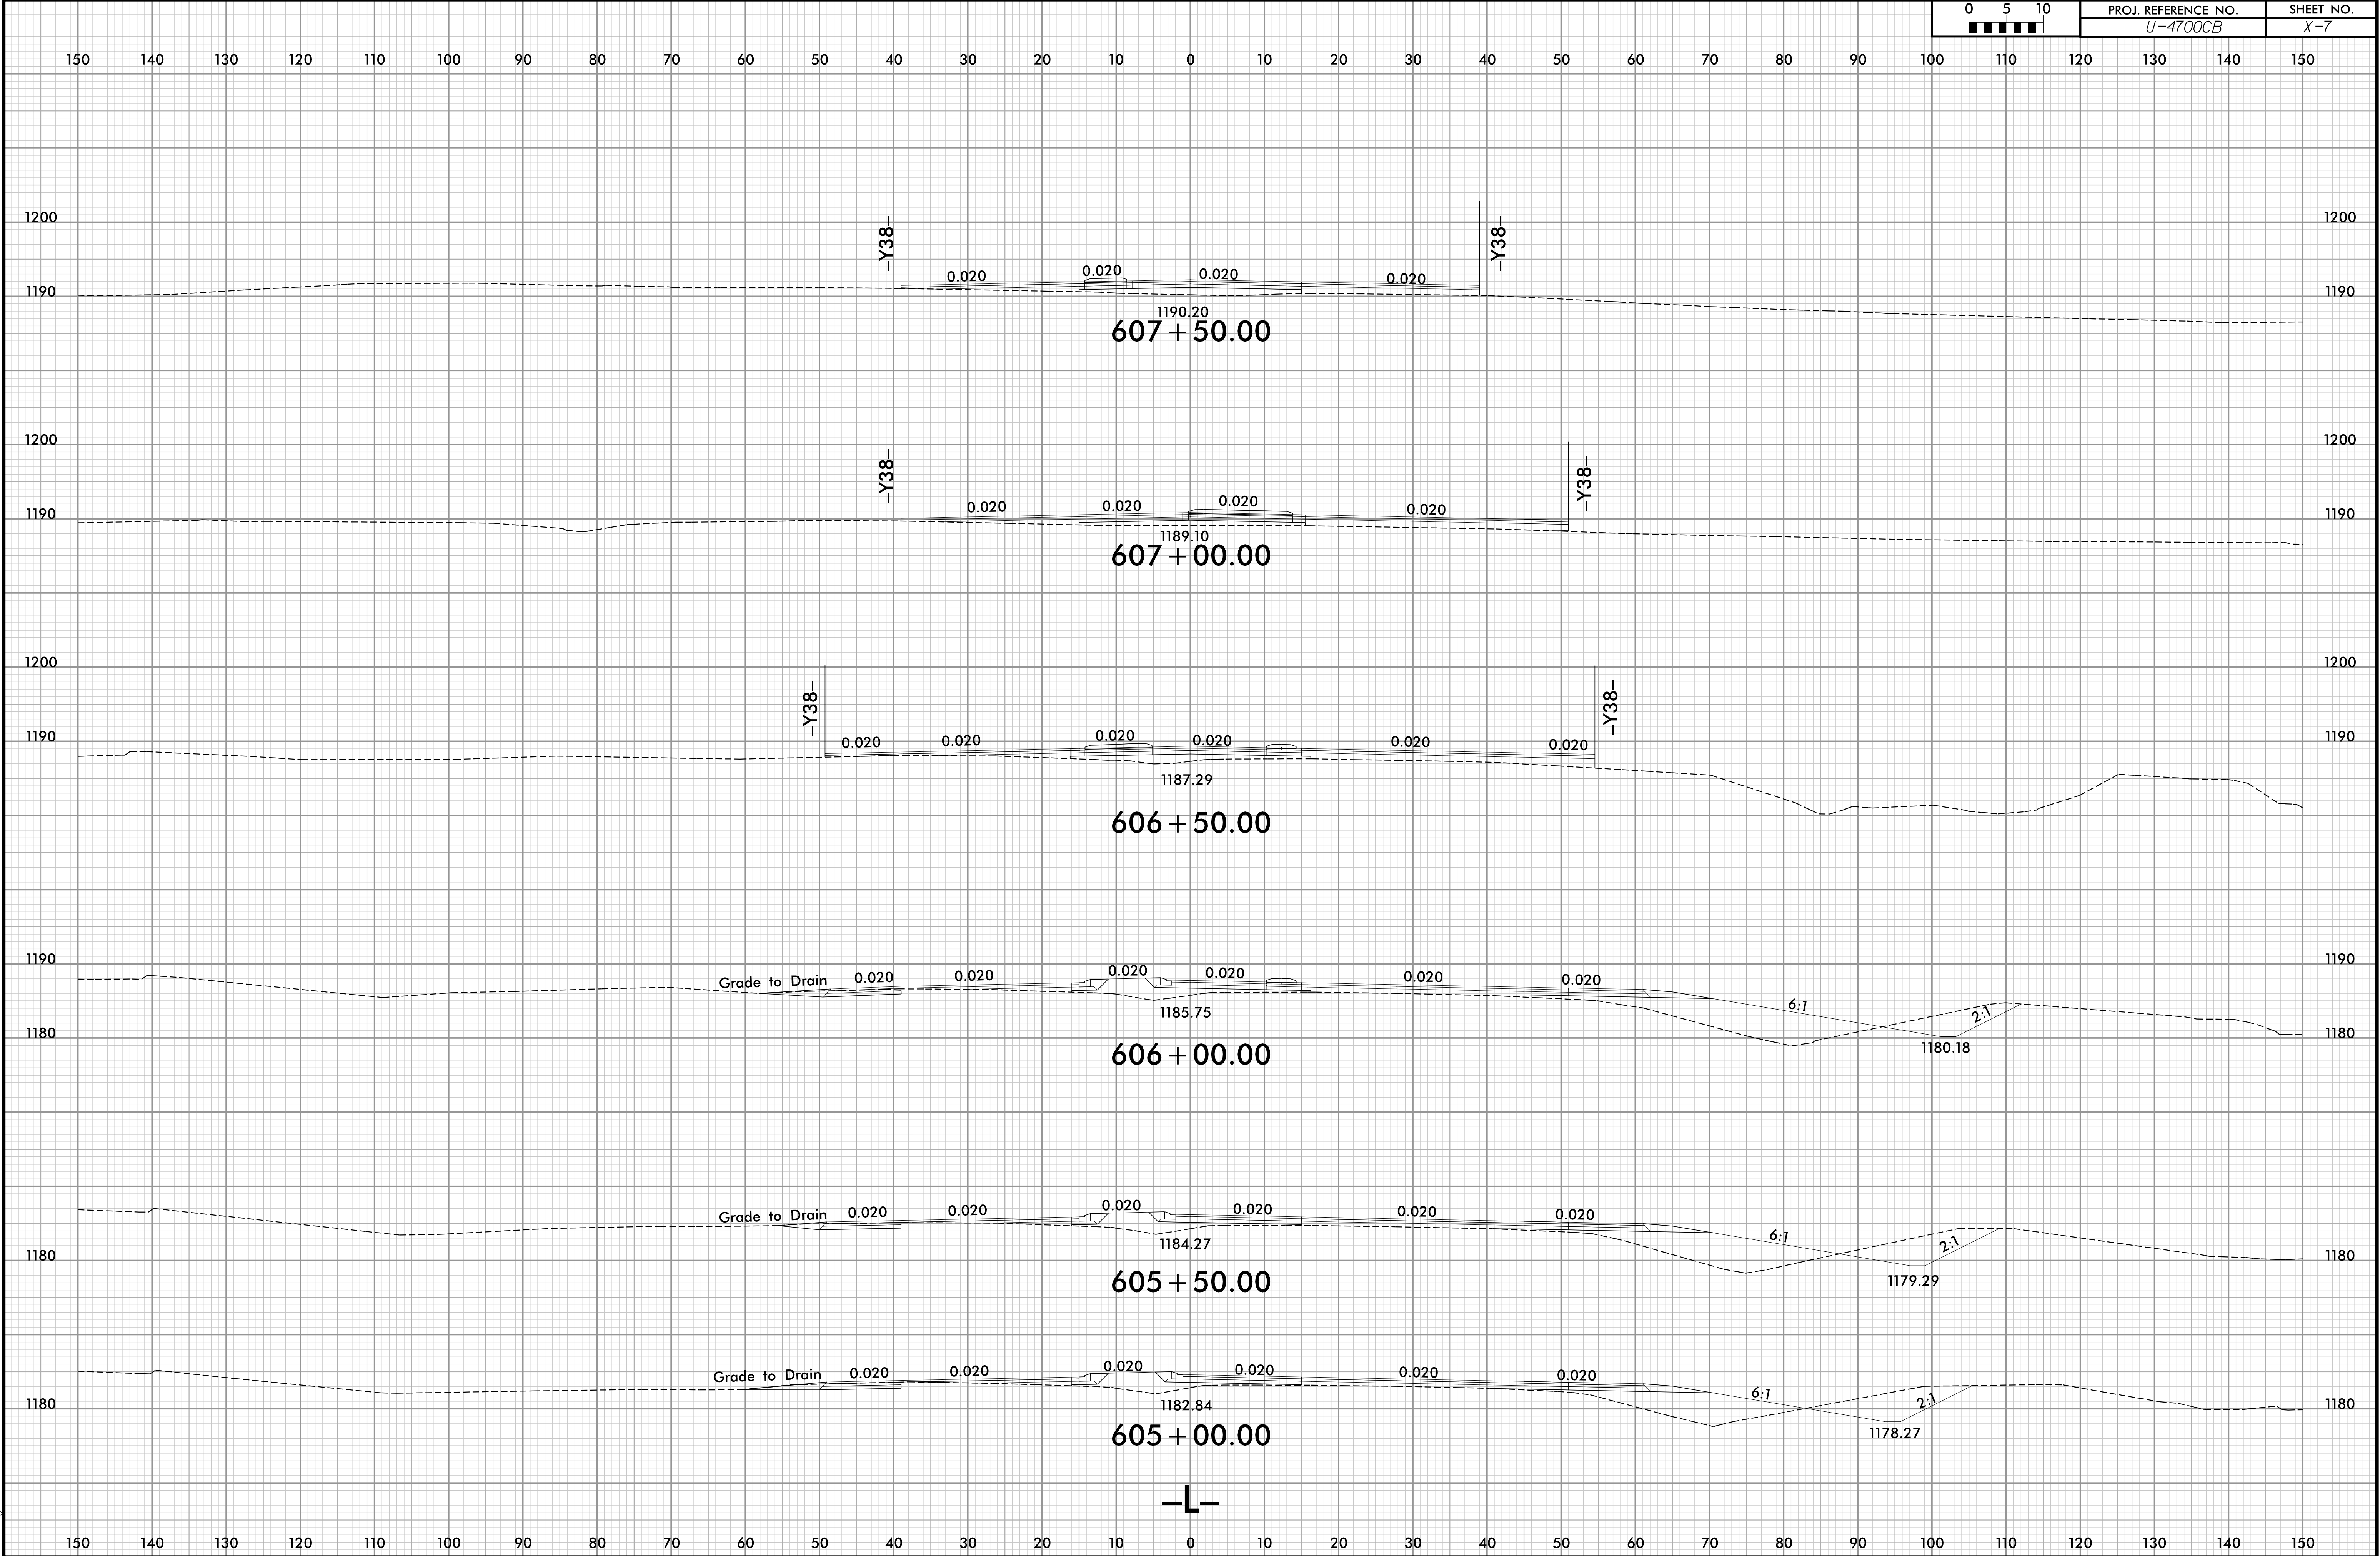


6/23/16

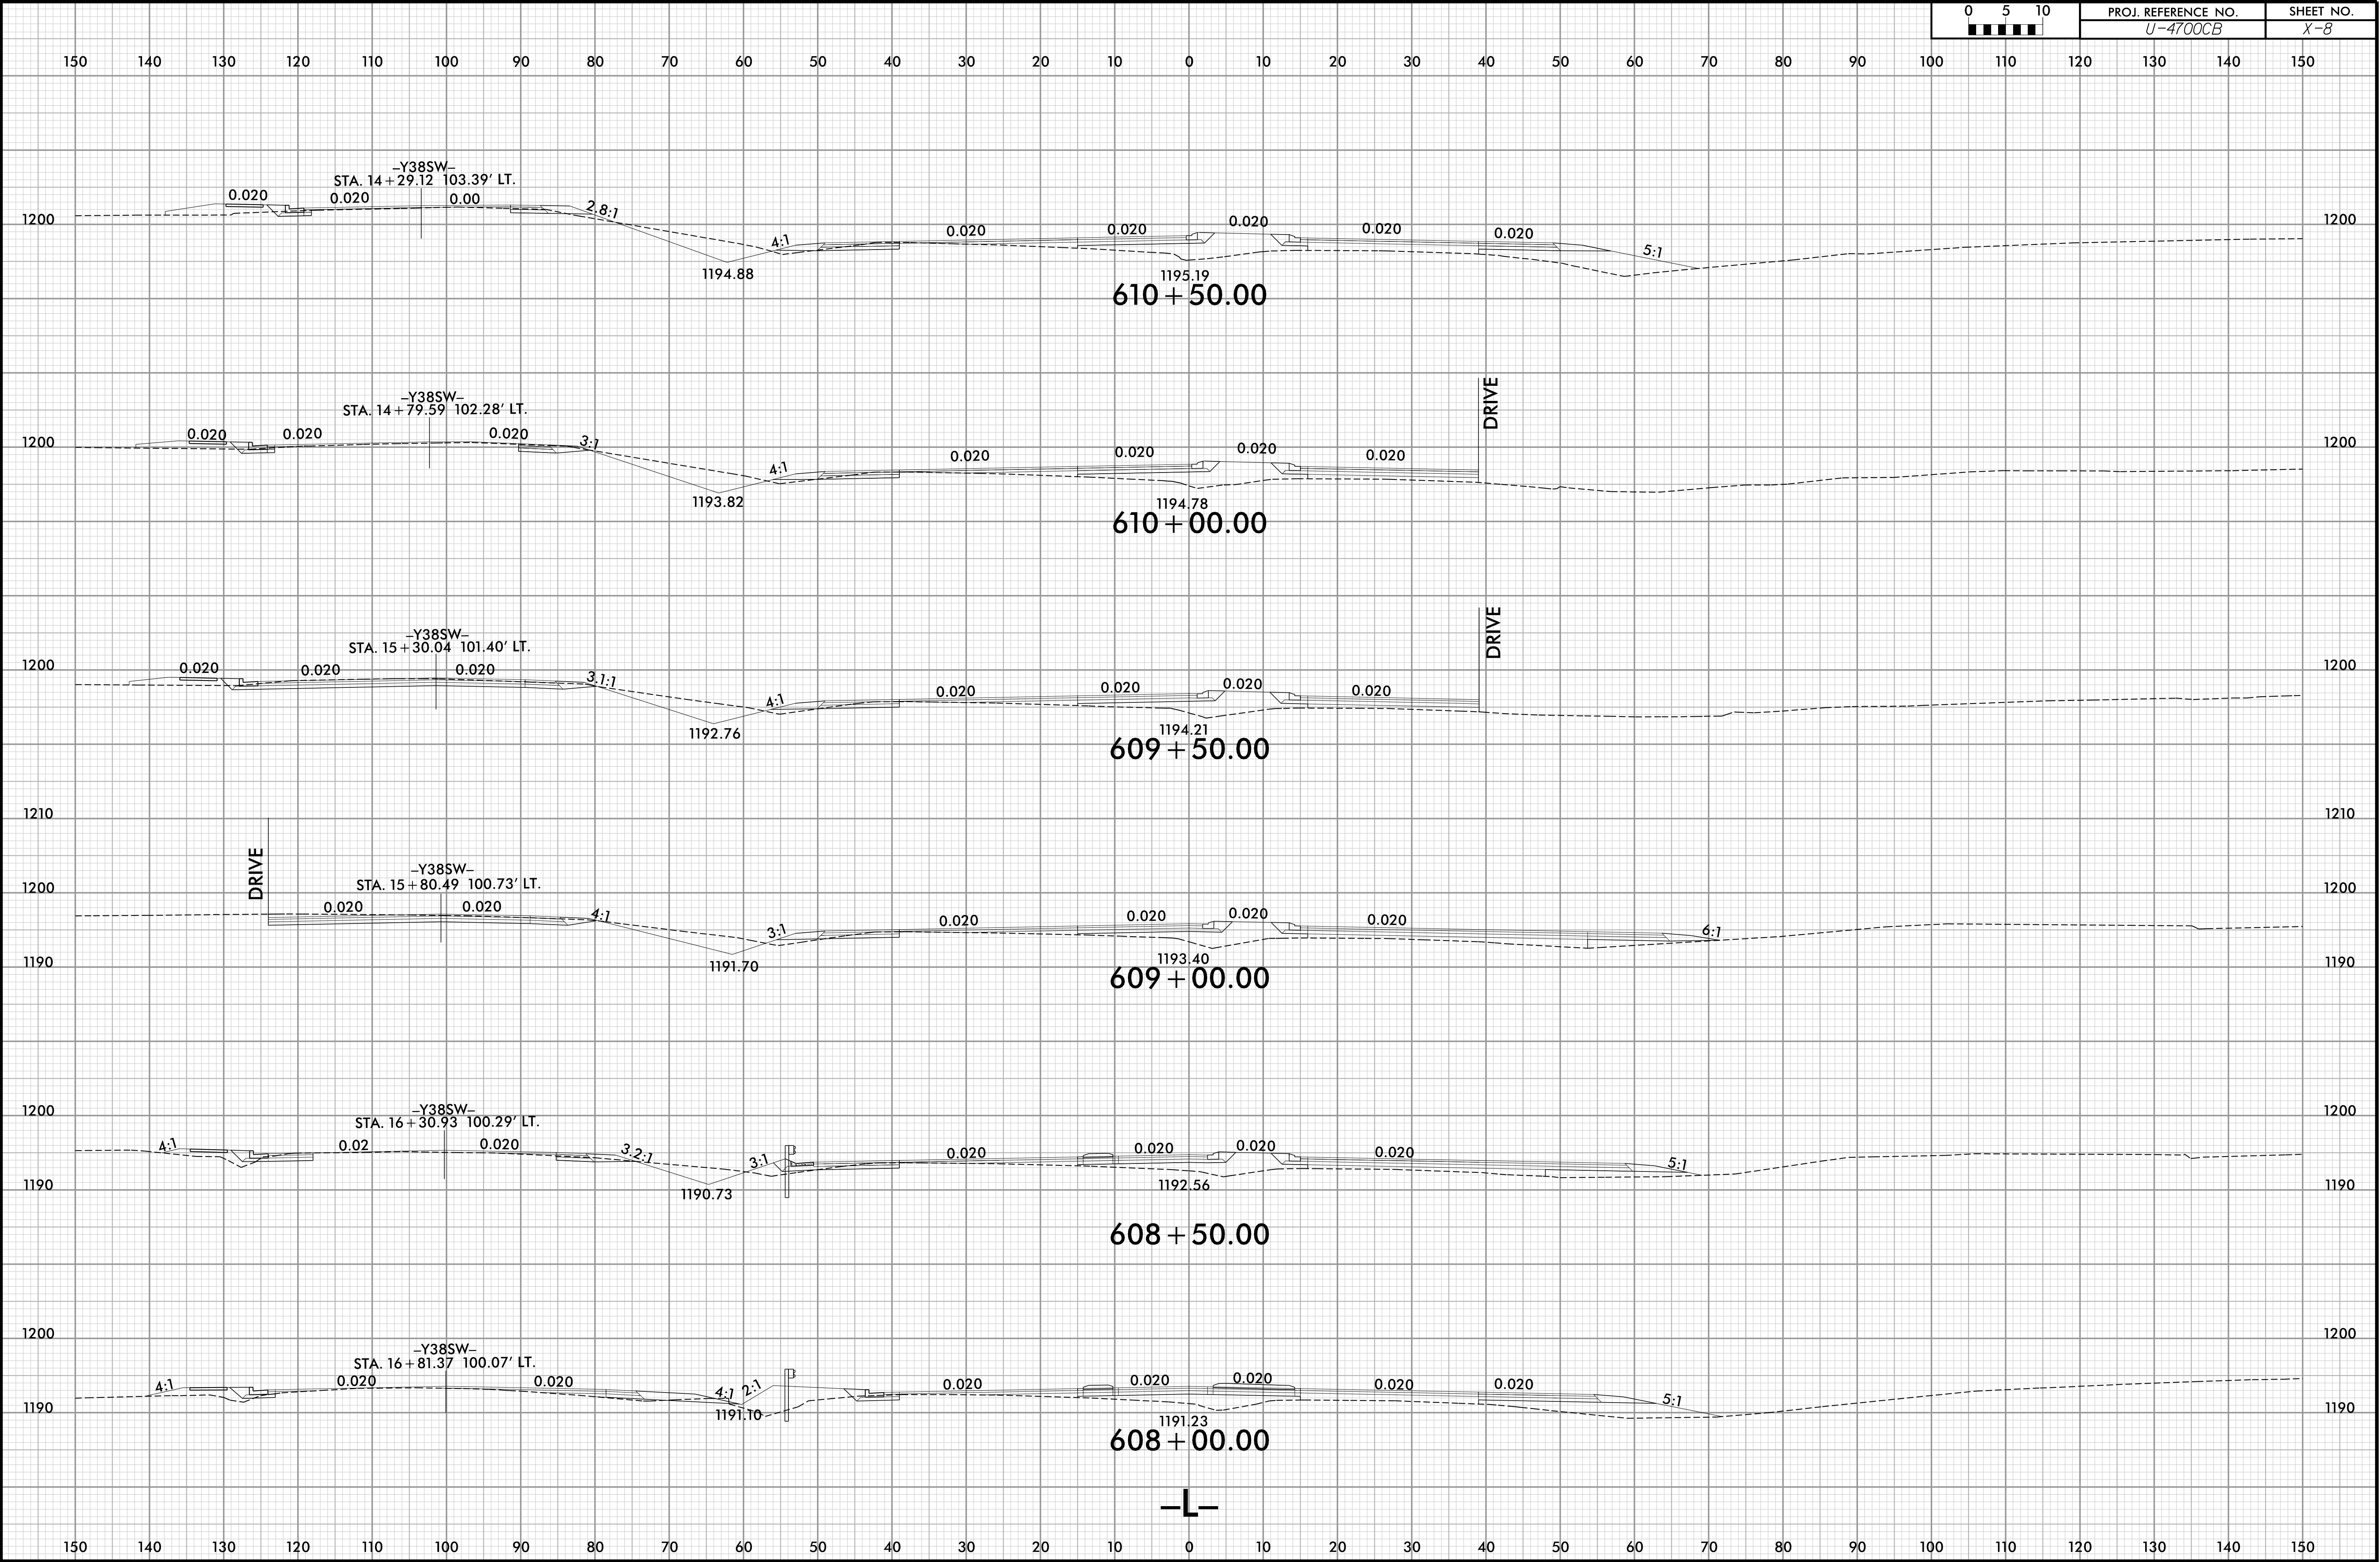


6/23/16


0	5	10	PROJ. REFERENCE NO.	SHEET NO.
■	■	■	U-4700CB	X-9

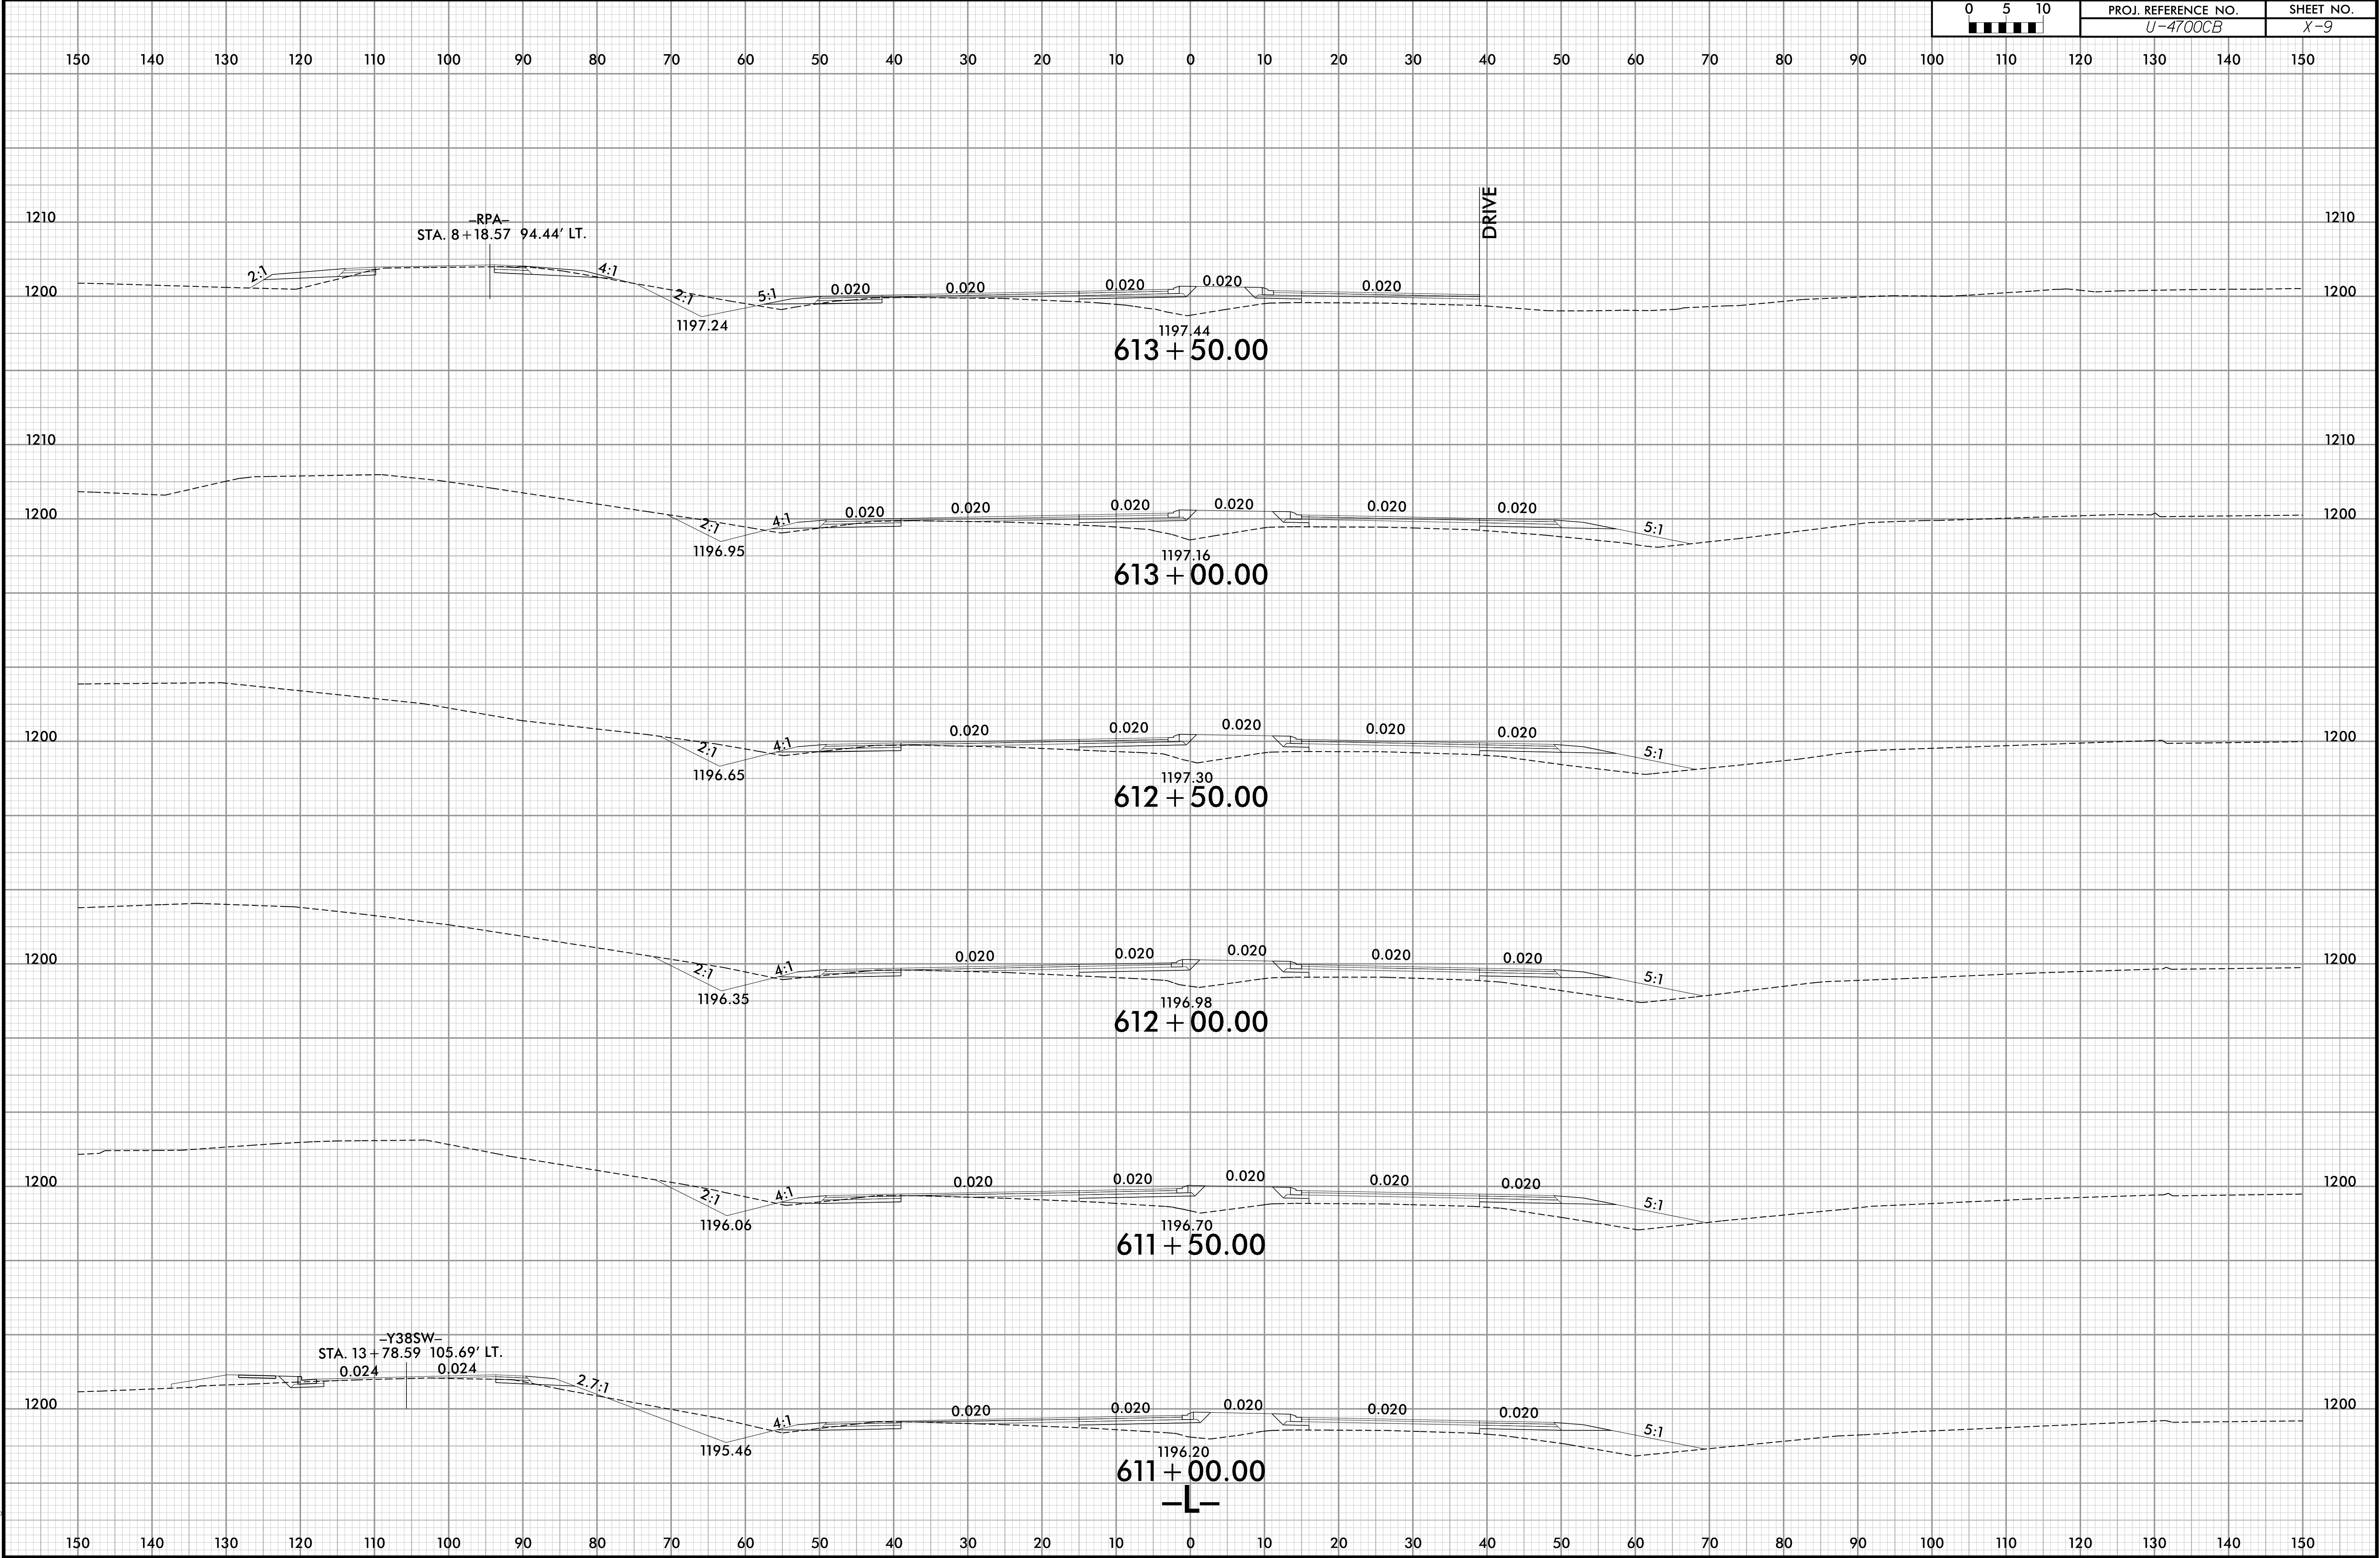


6/23/16


0	5	10	PROJ. REFERENCE NO.	SHEET NO.
■	■	■	U-4700CB	X-10

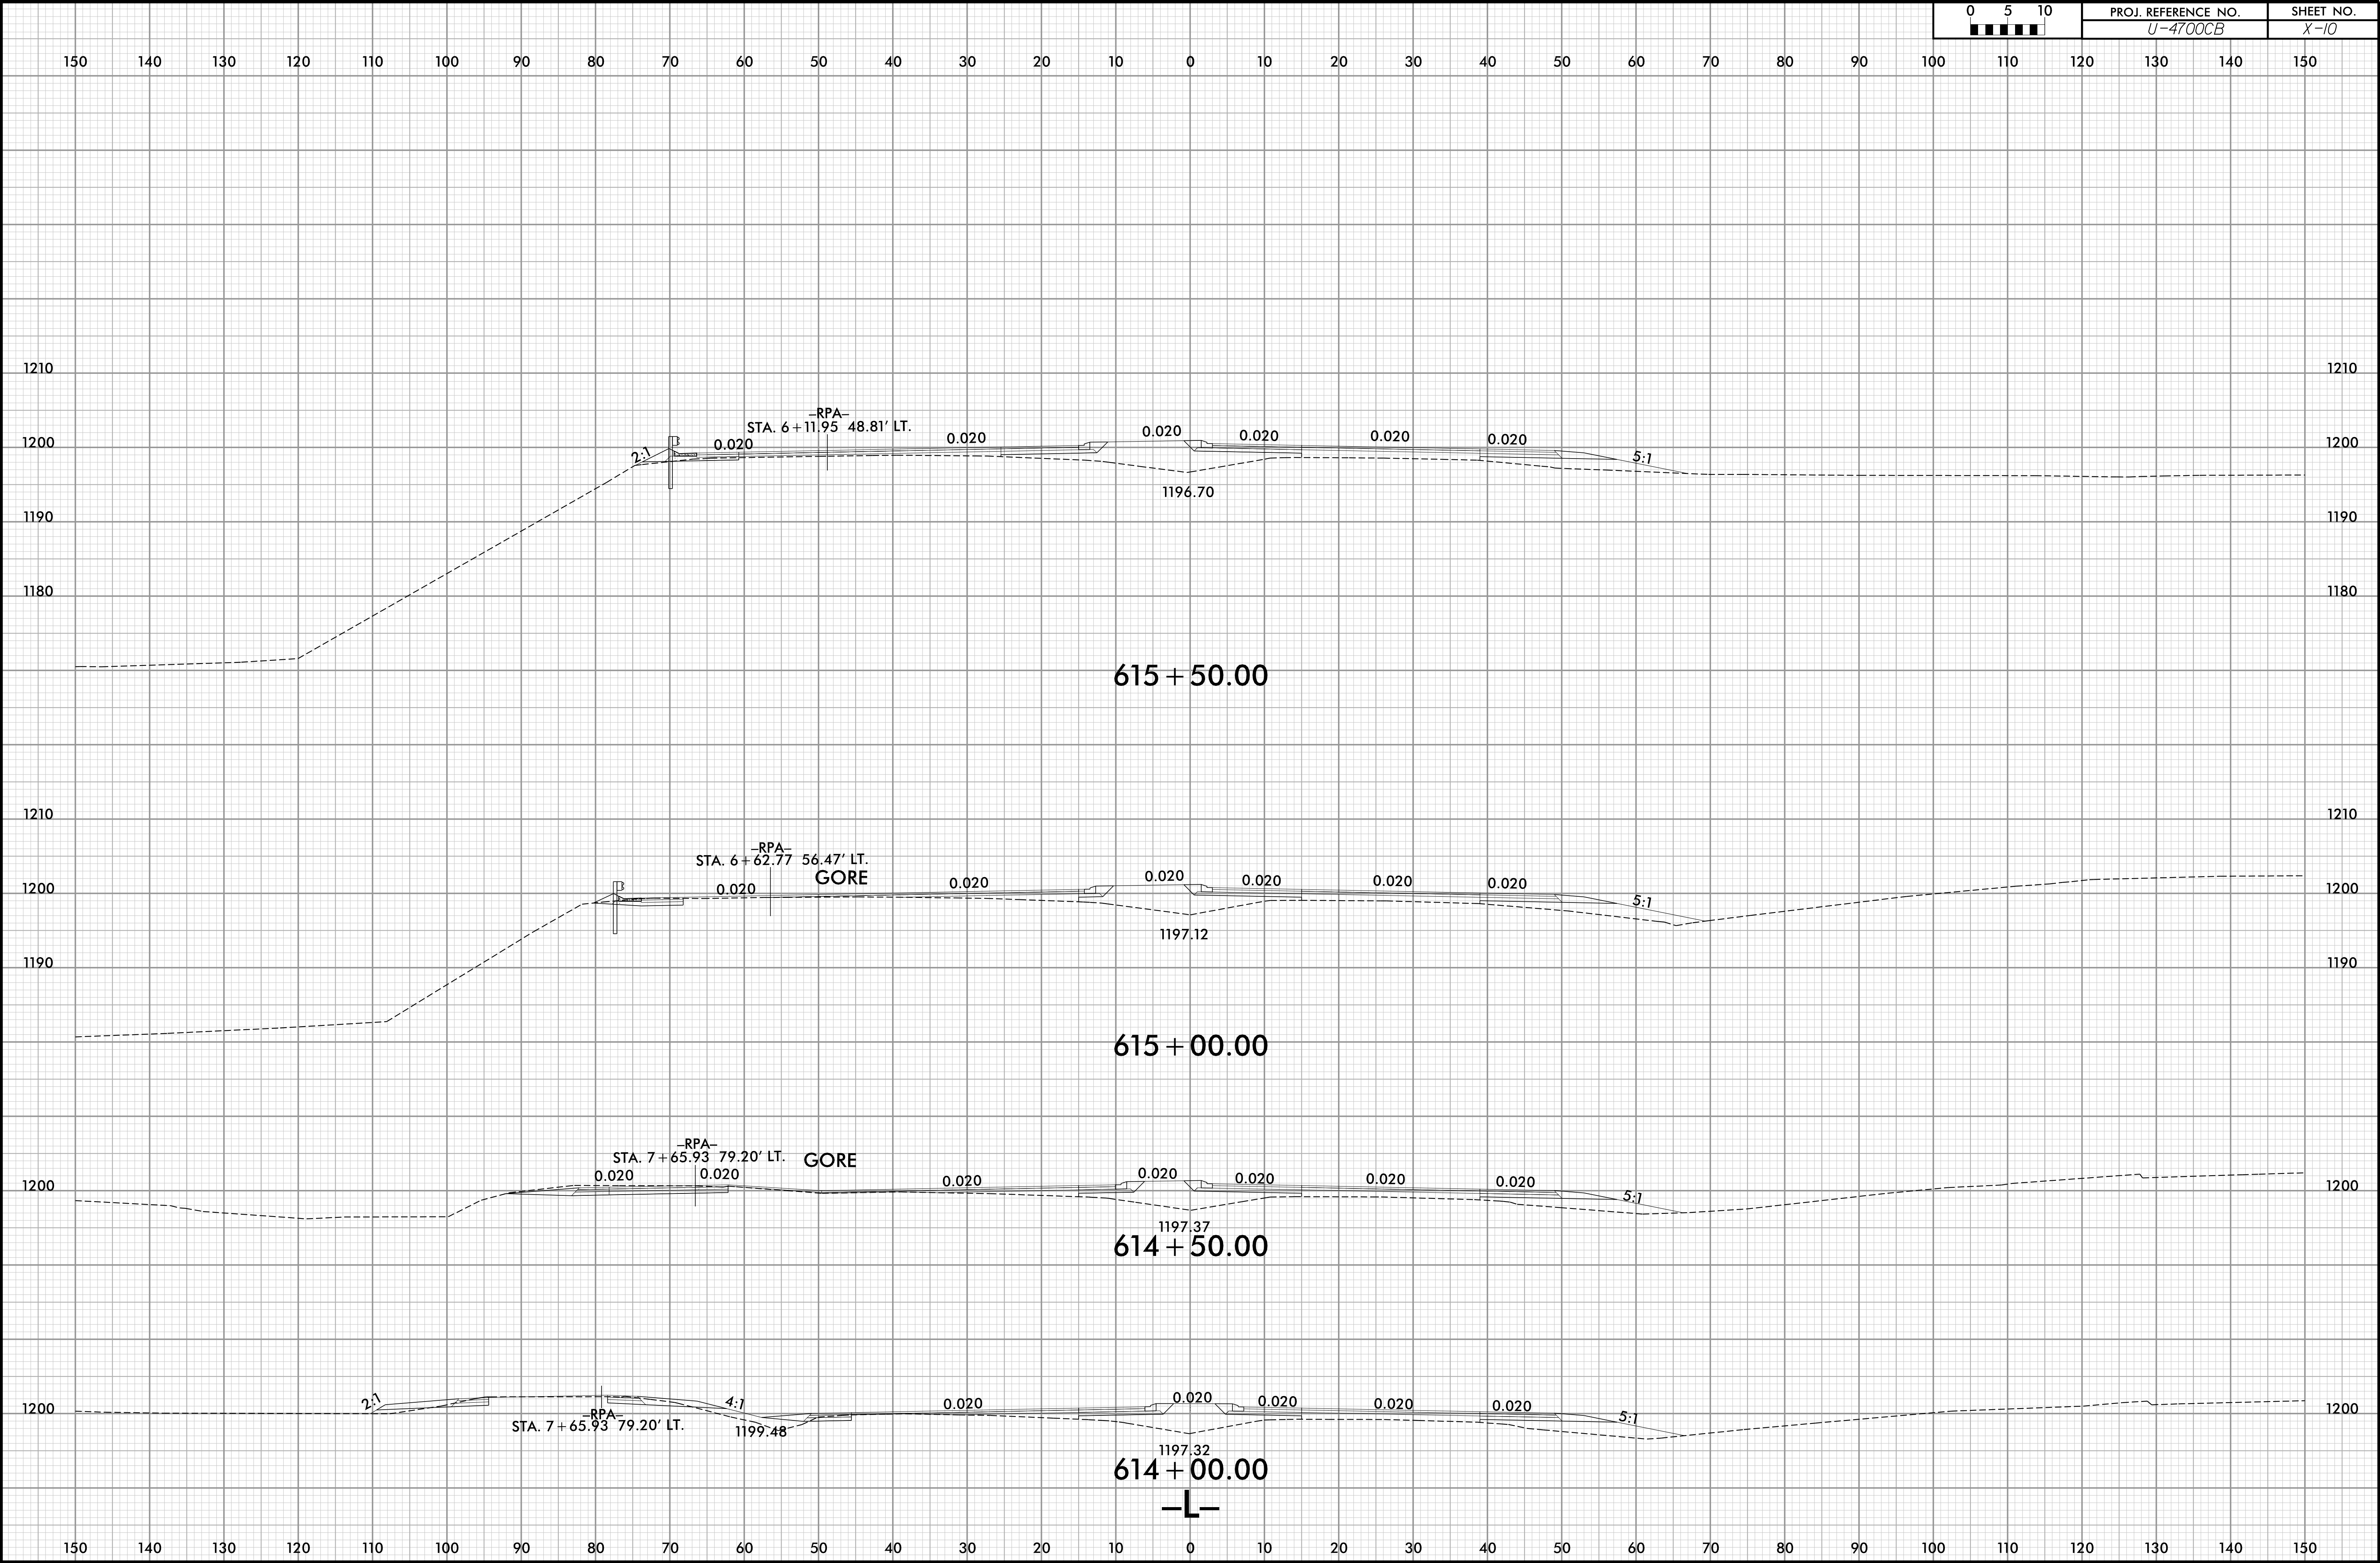

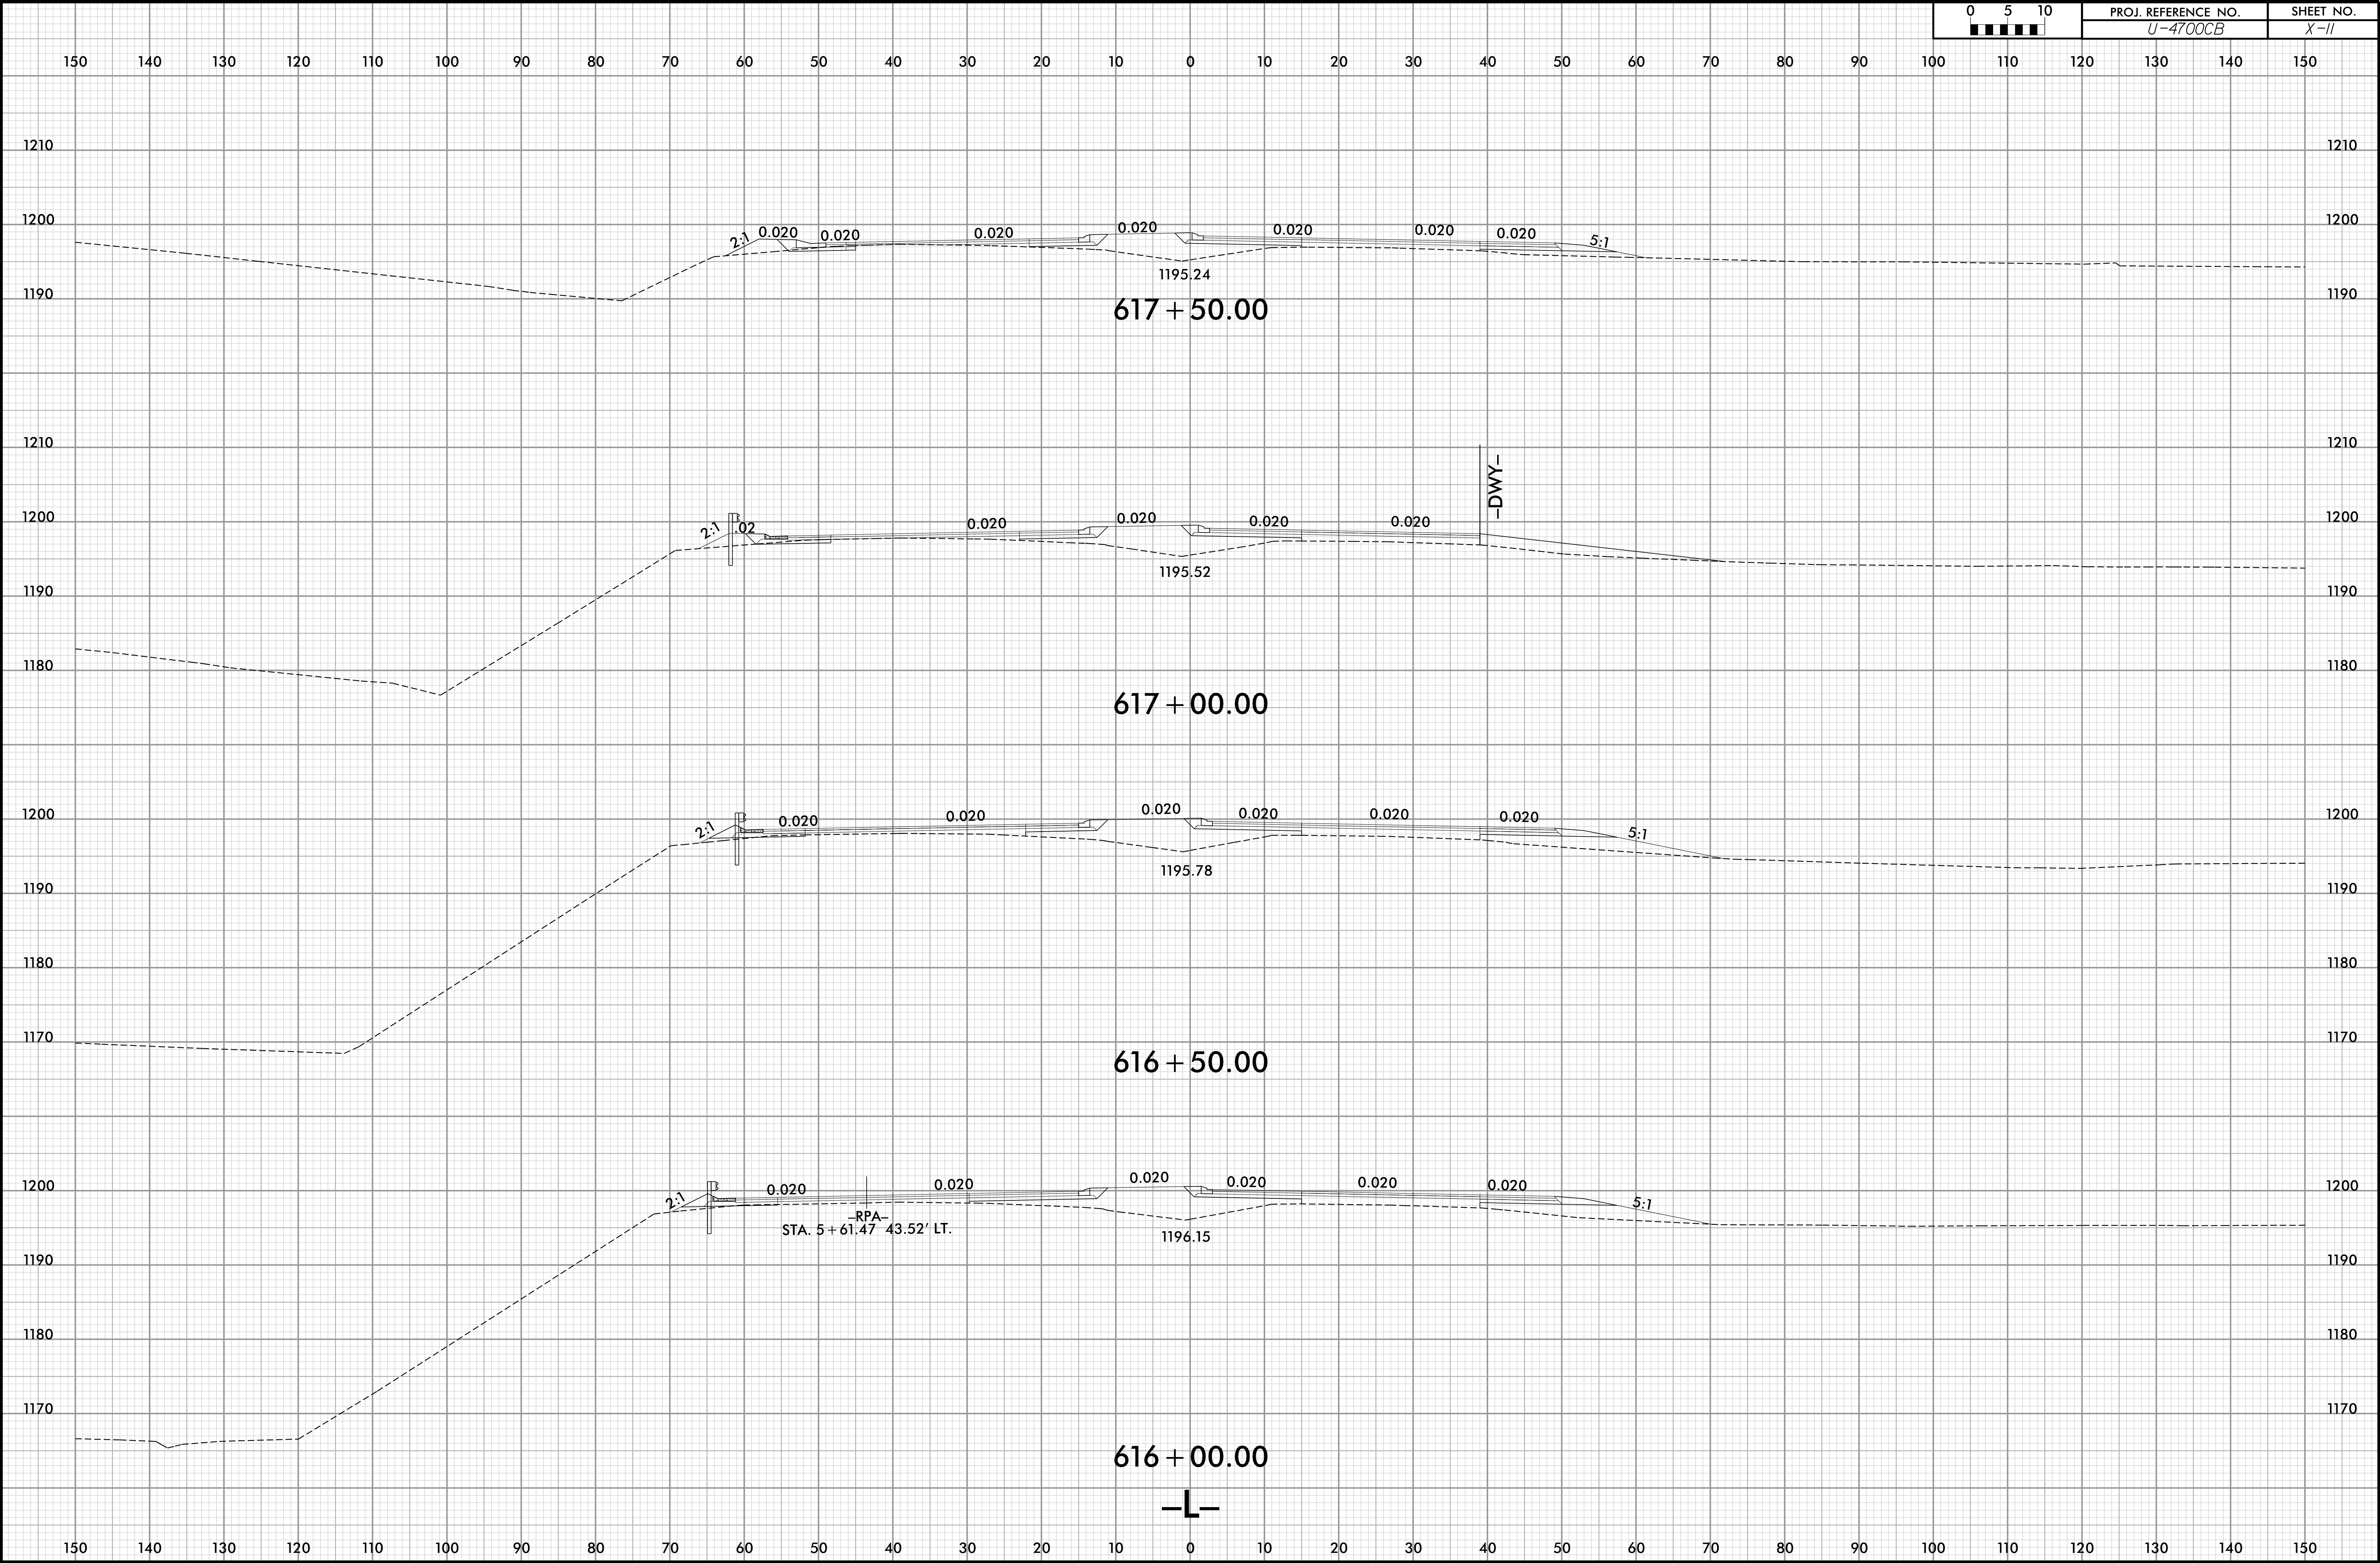

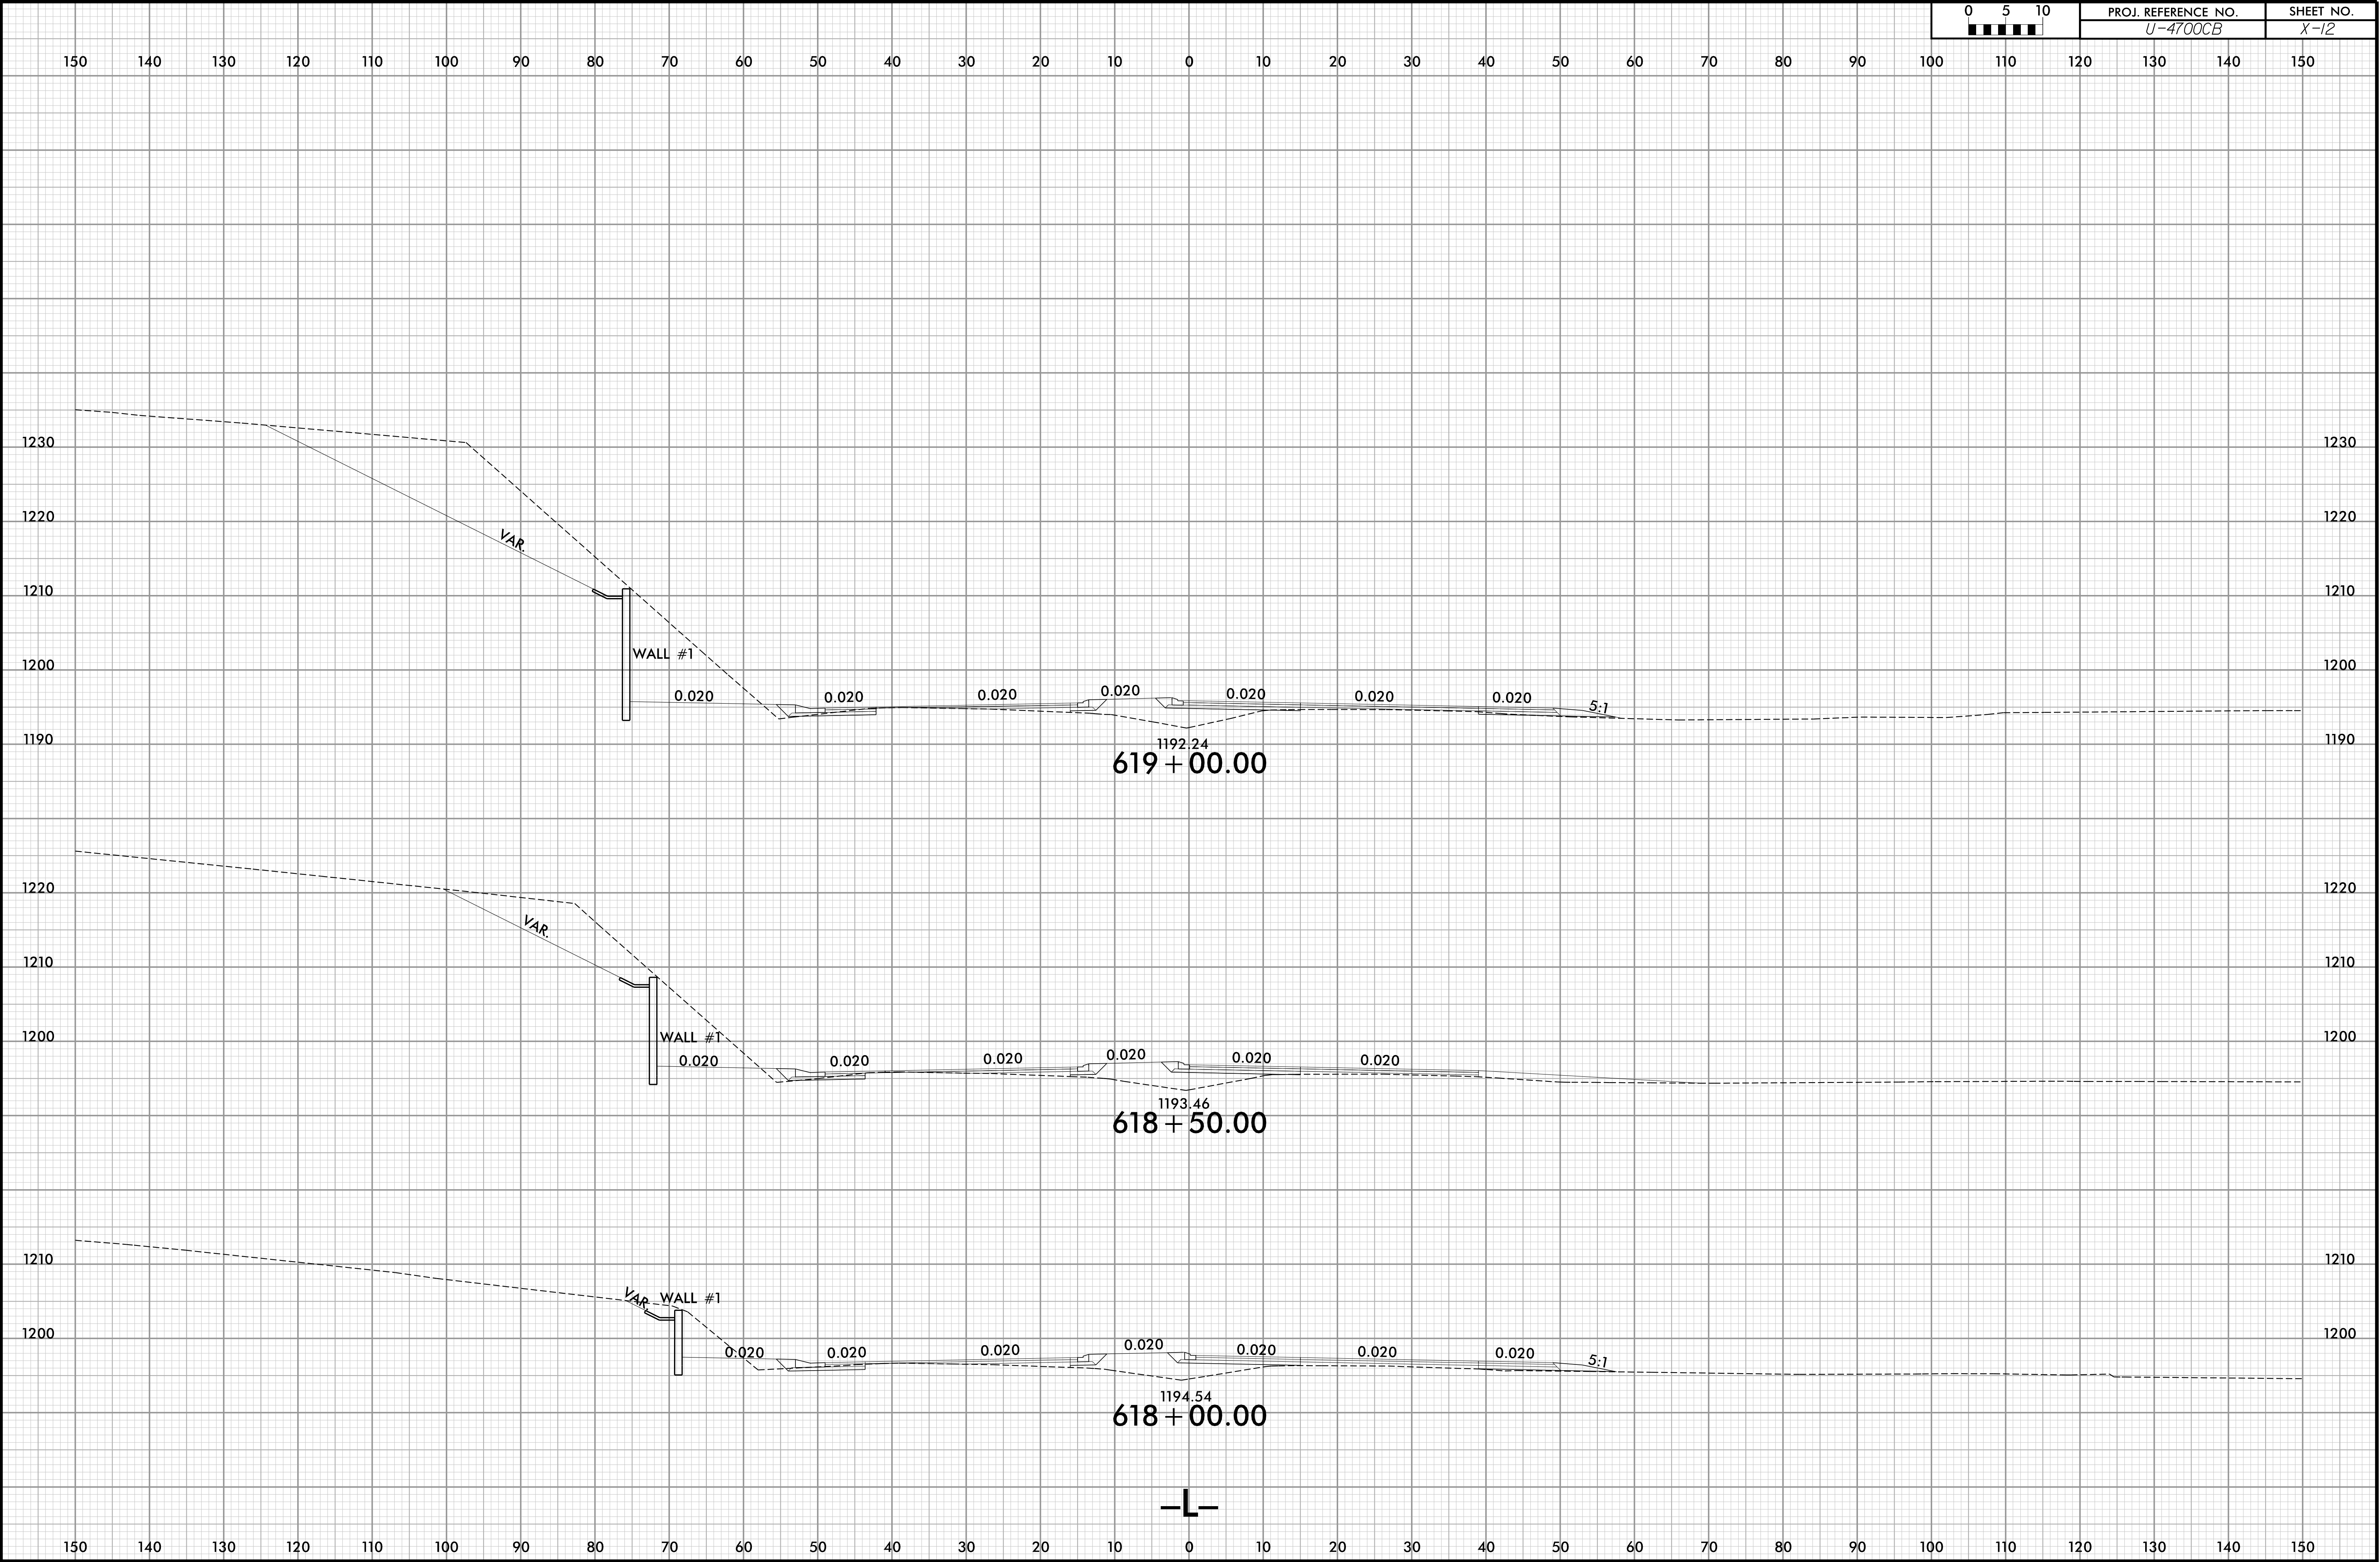


6/23/16

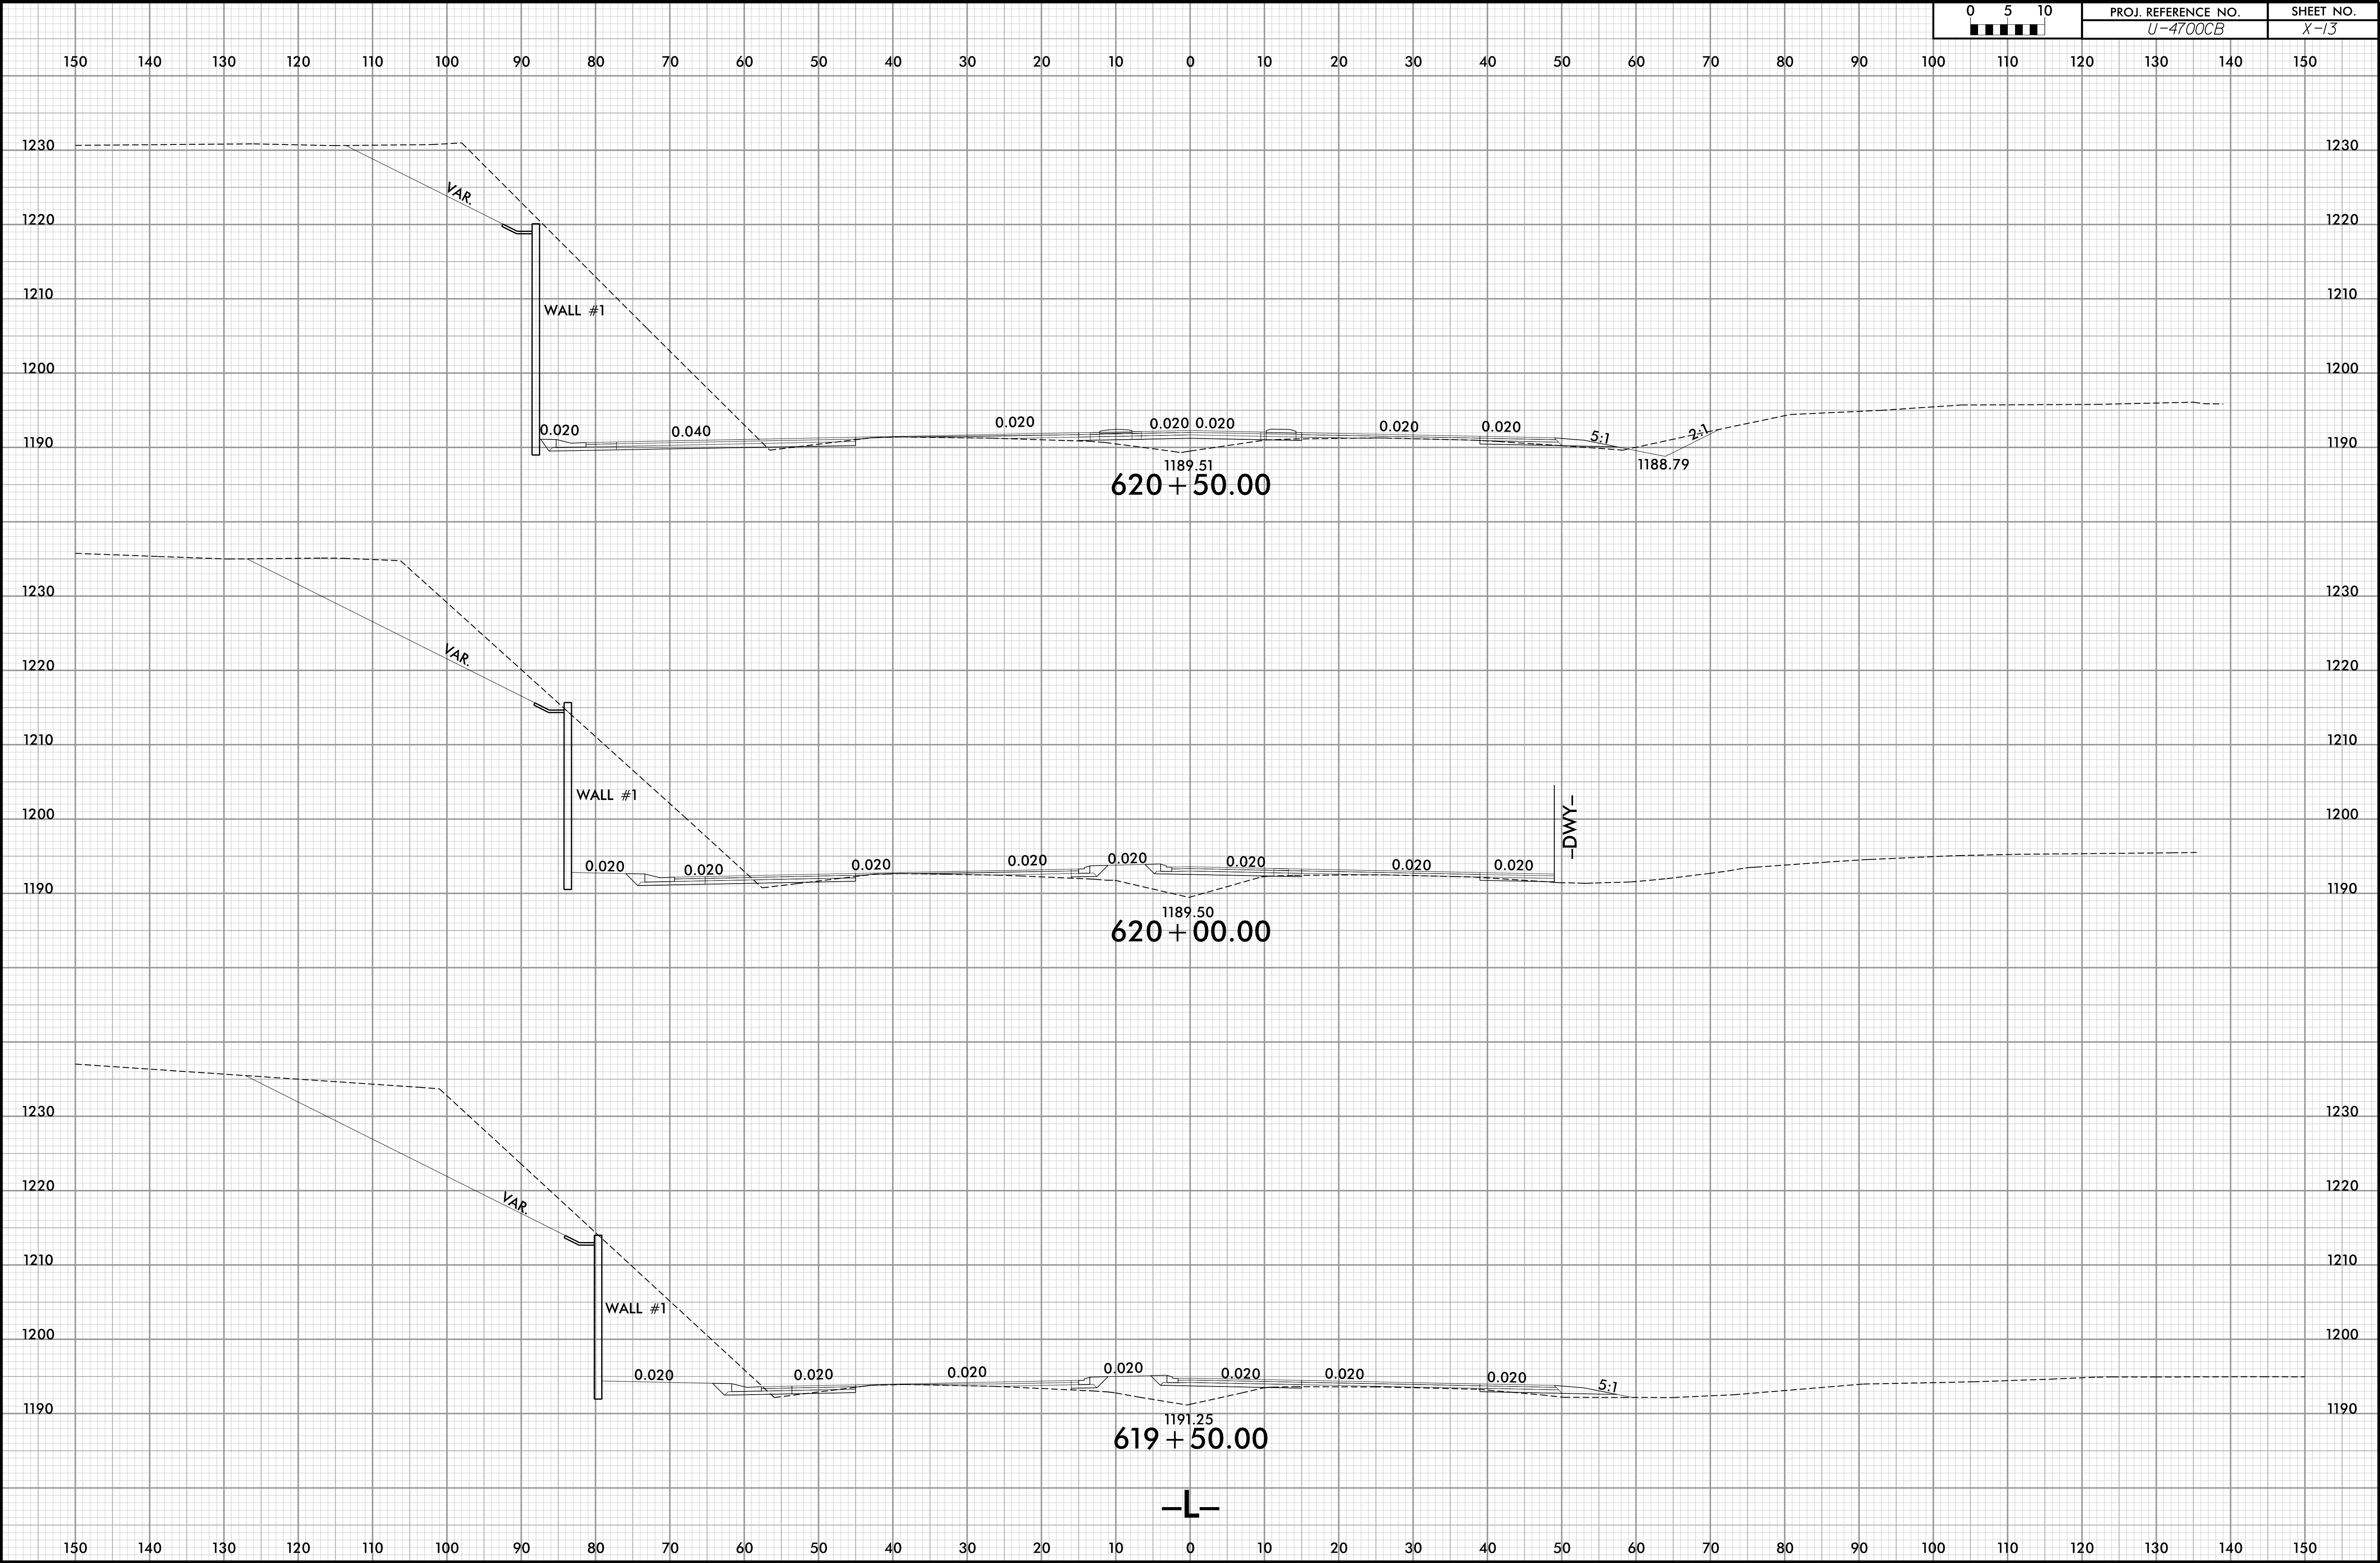


6/23/16

05	PROJ. REFERENCE NO.	SHEET NO.
11	U-4700CB	X-14

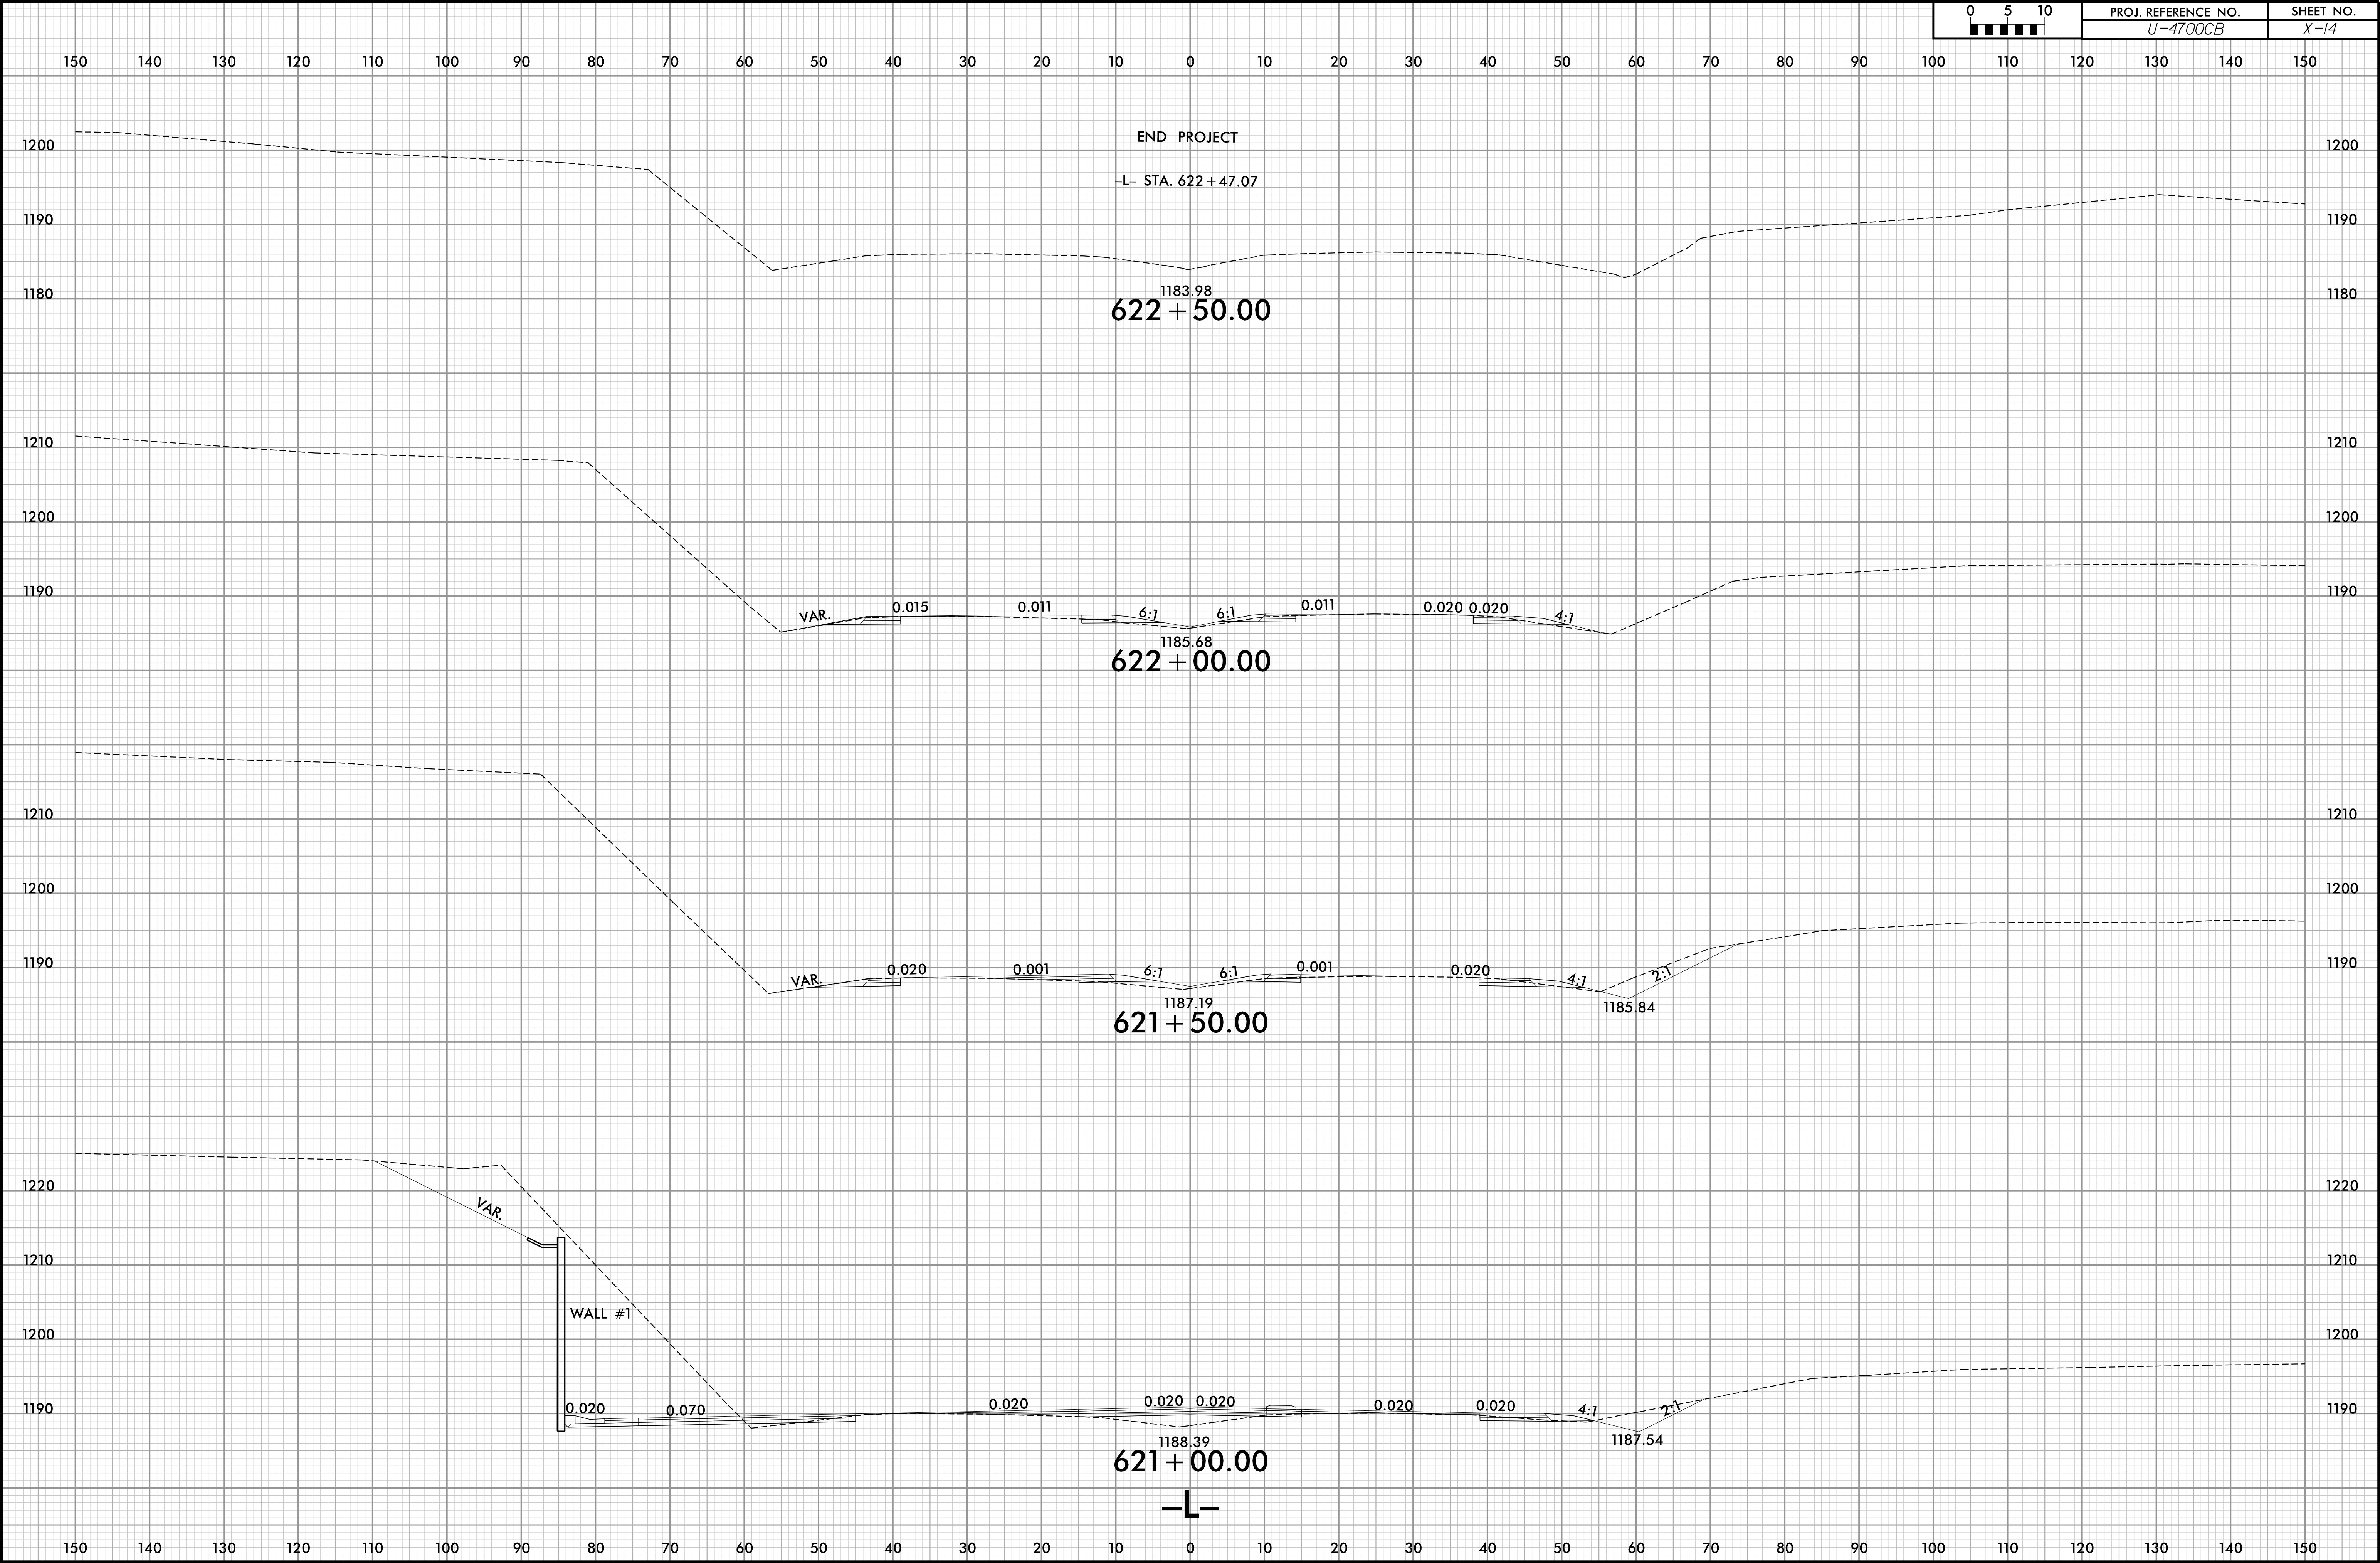




6/23/16

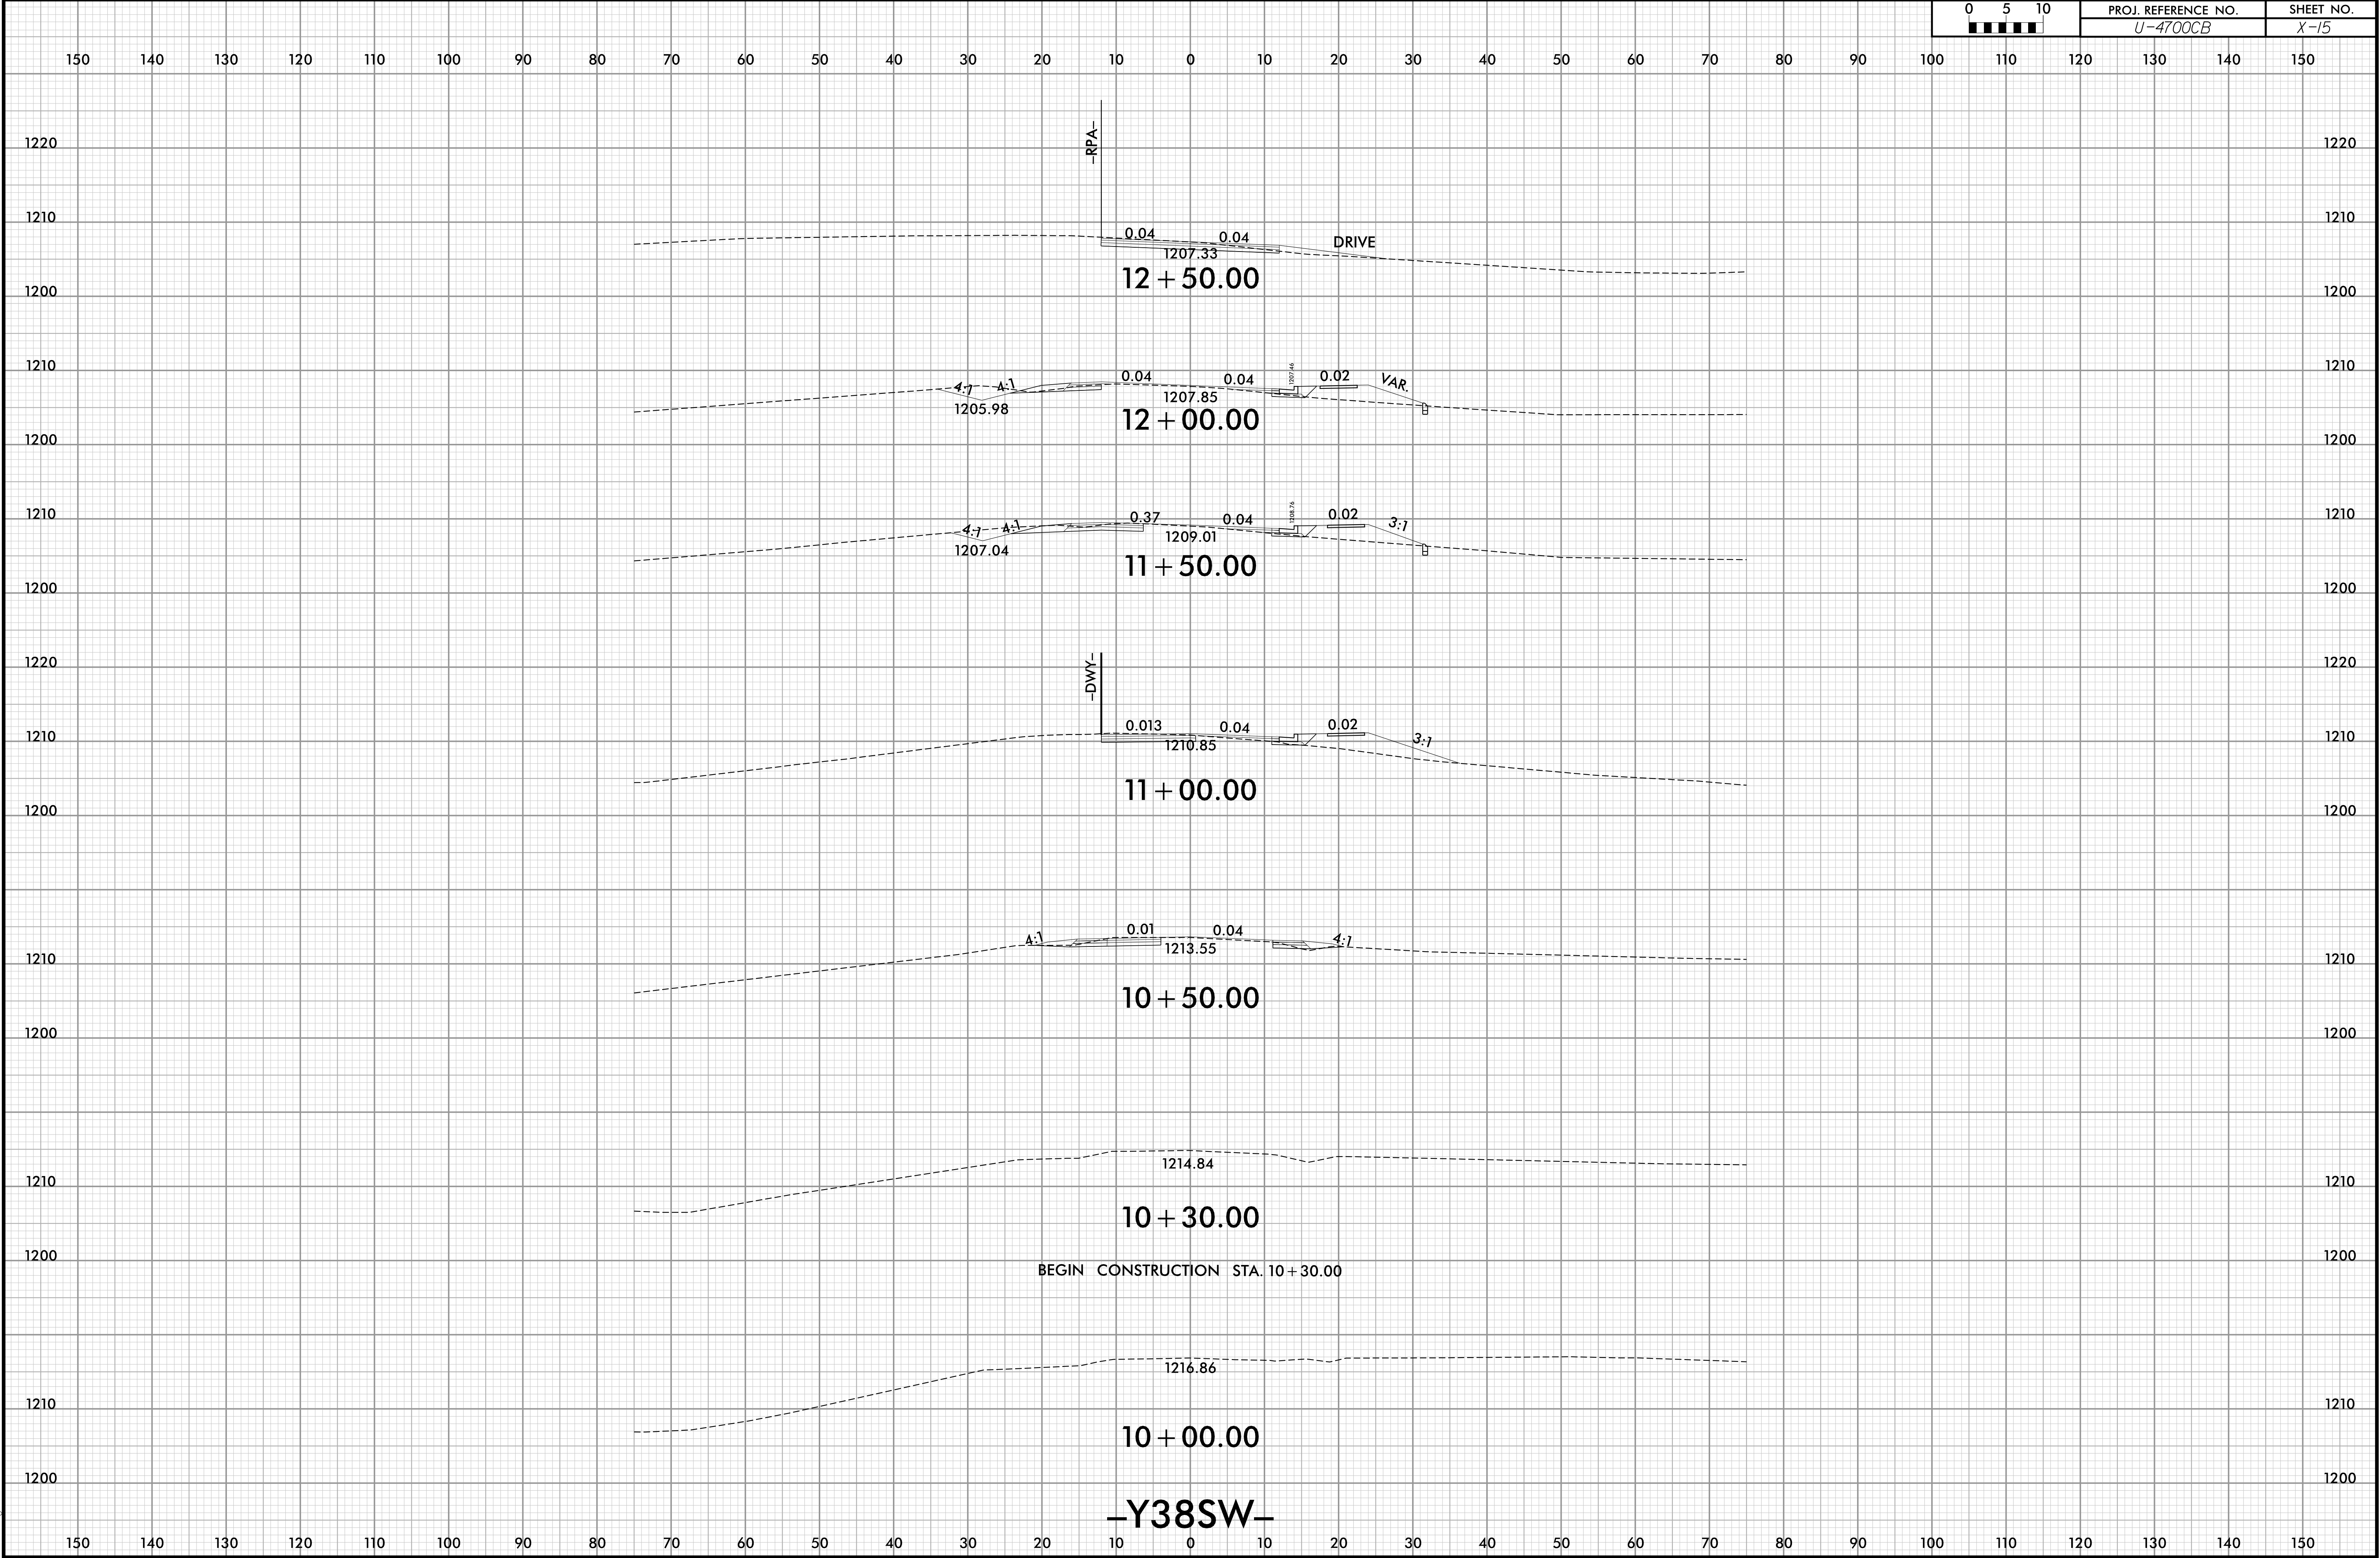

6/23/16

0	5	10	PROJ. REFERENCE NO.	SHEET NO.
■	■	■	U-4700CB	X-16


150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150

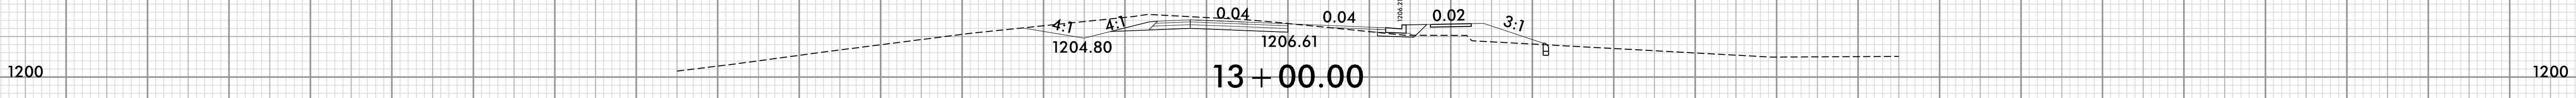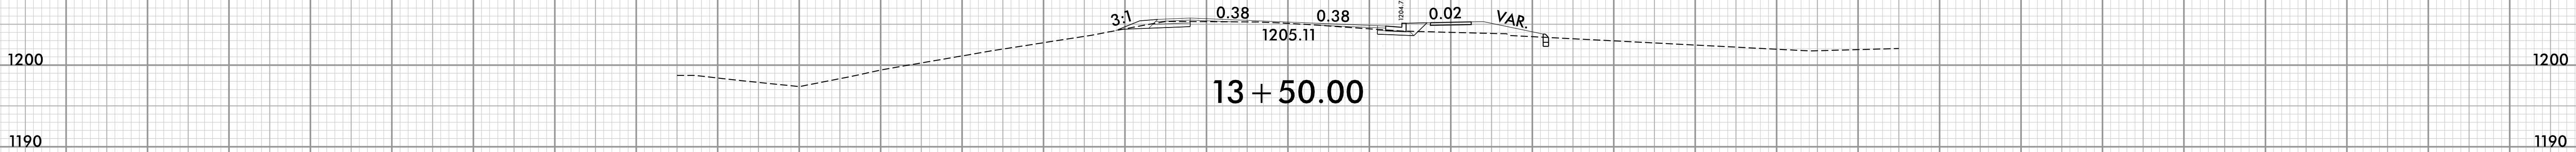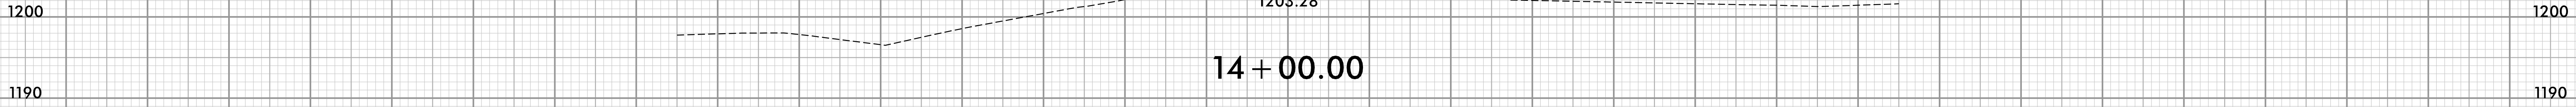

-Y38SW-

150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150

6/23/16

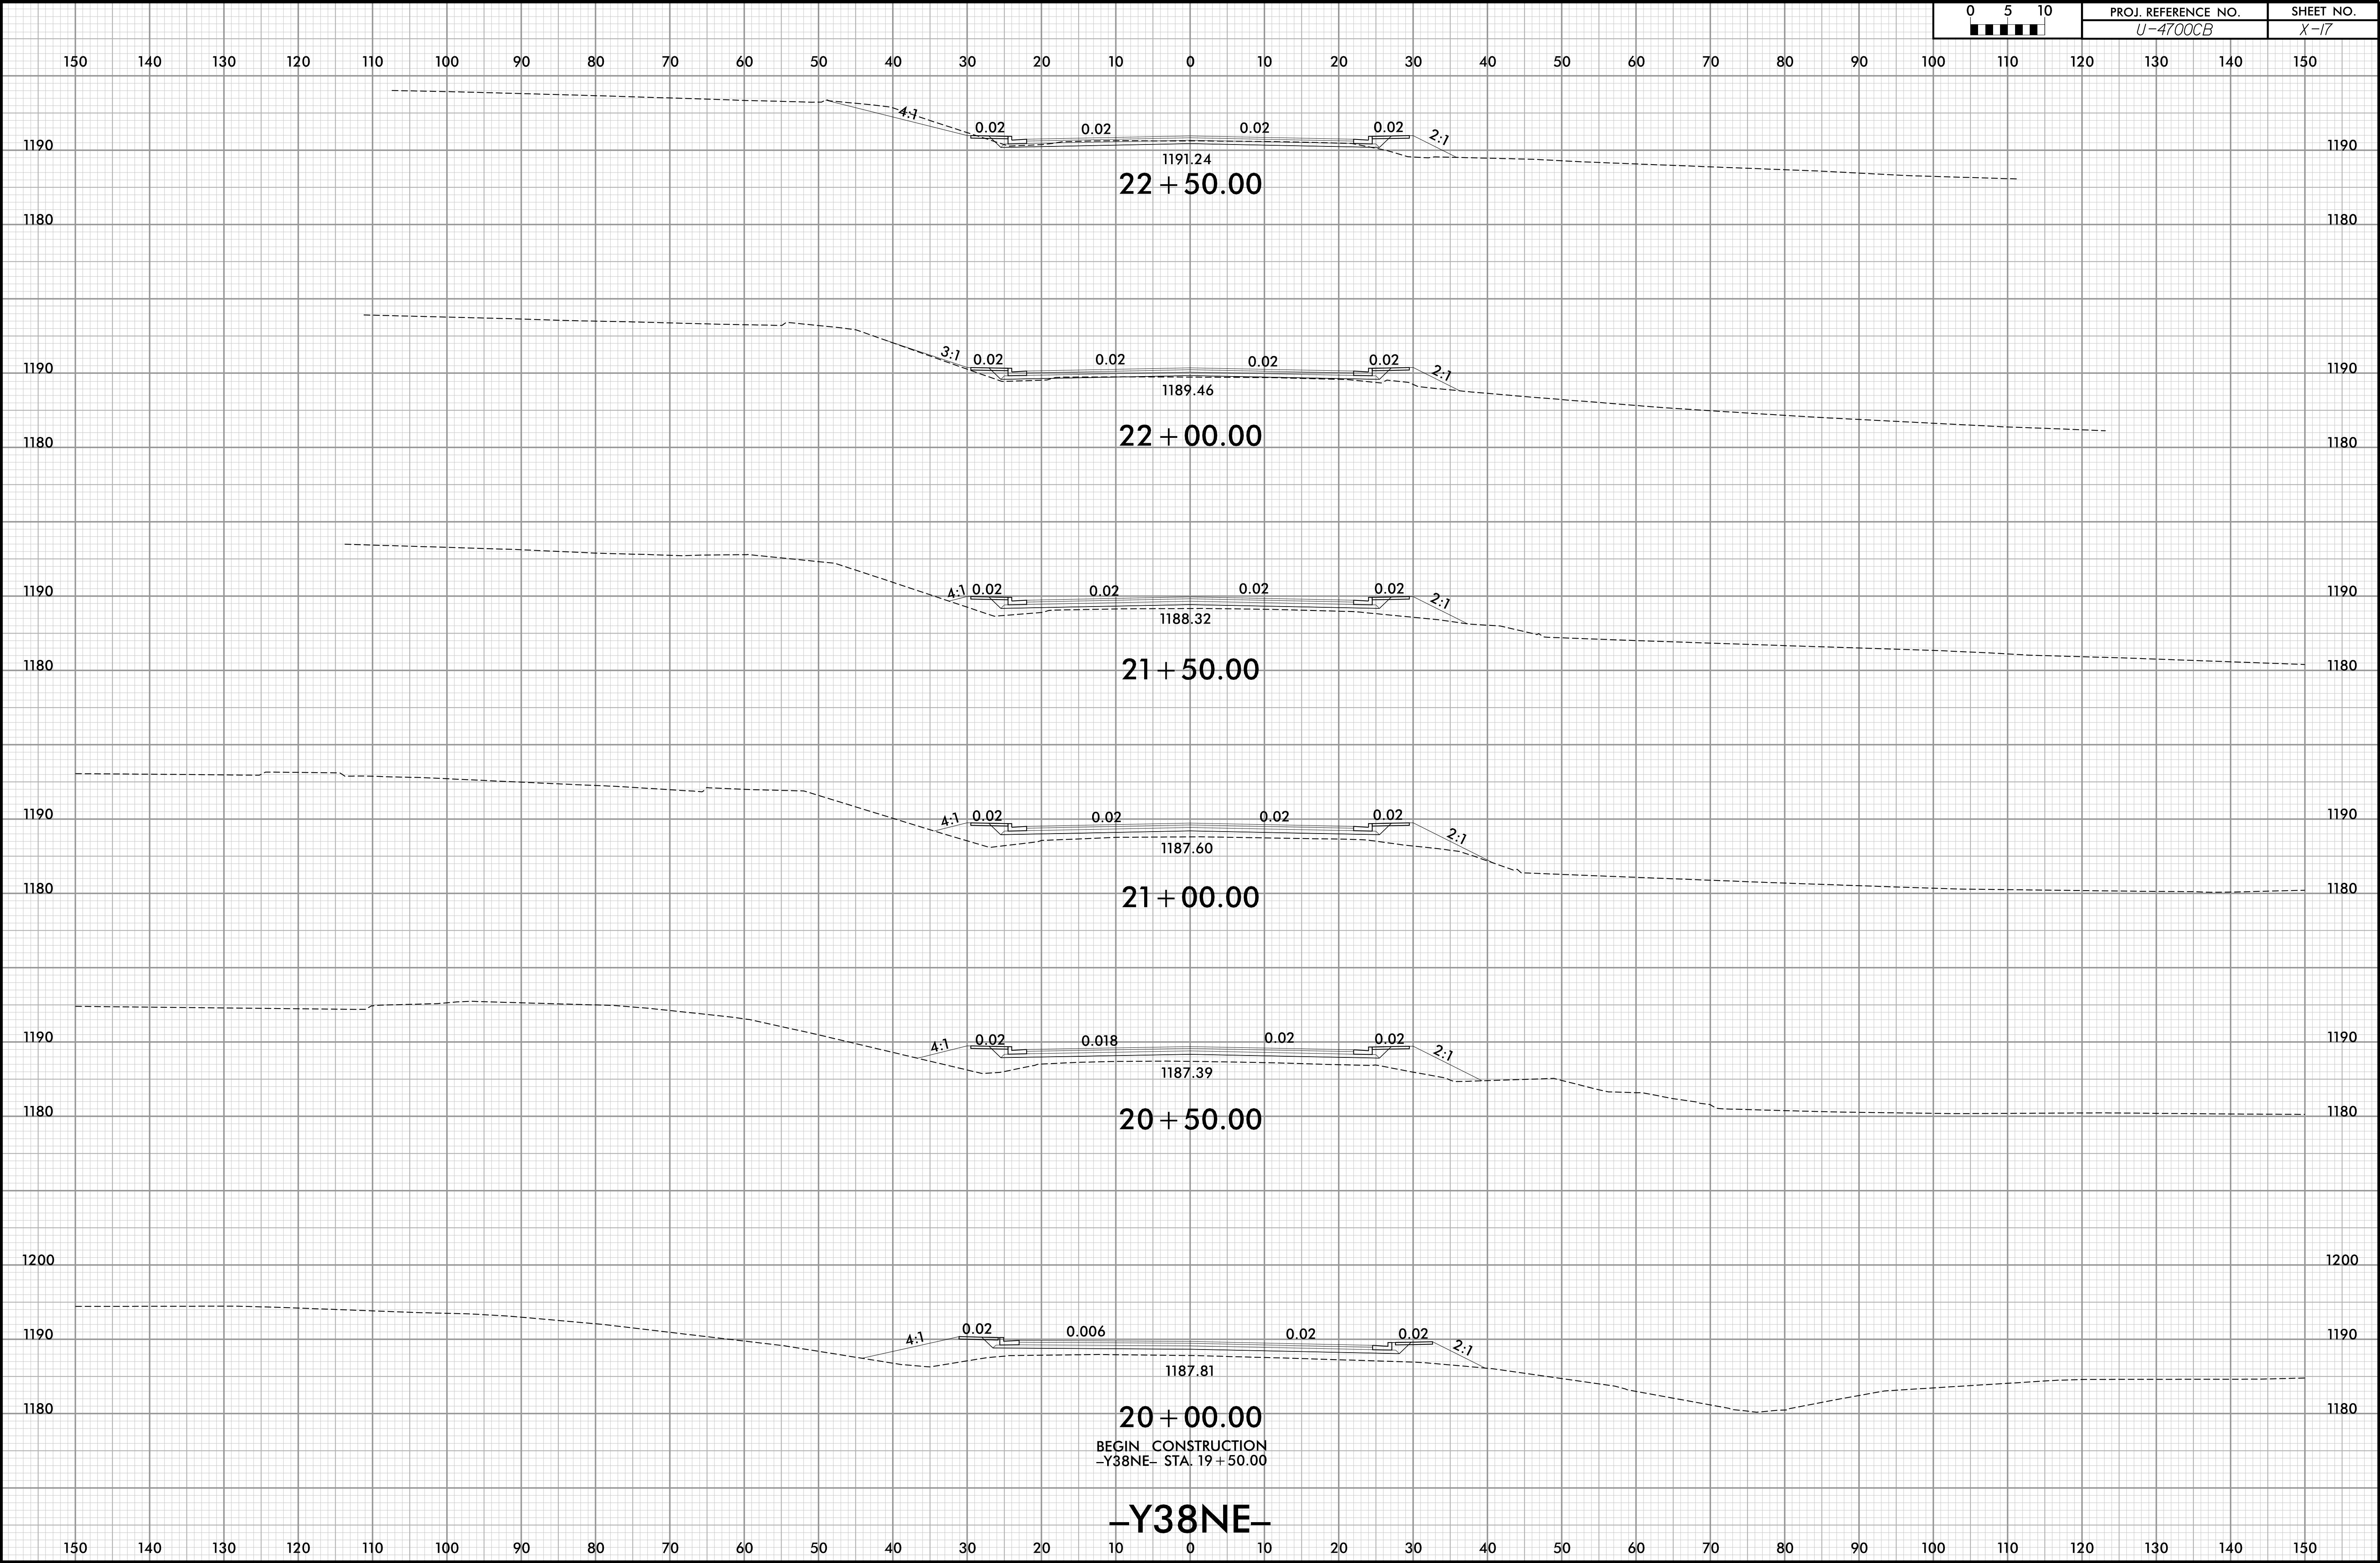

6/23/16

0	5	10	PROJ. REFERENCE NO.	SHEET NO.
■	■	■	U-4700CB	X-18

