


TIP PROJECT: U-5728

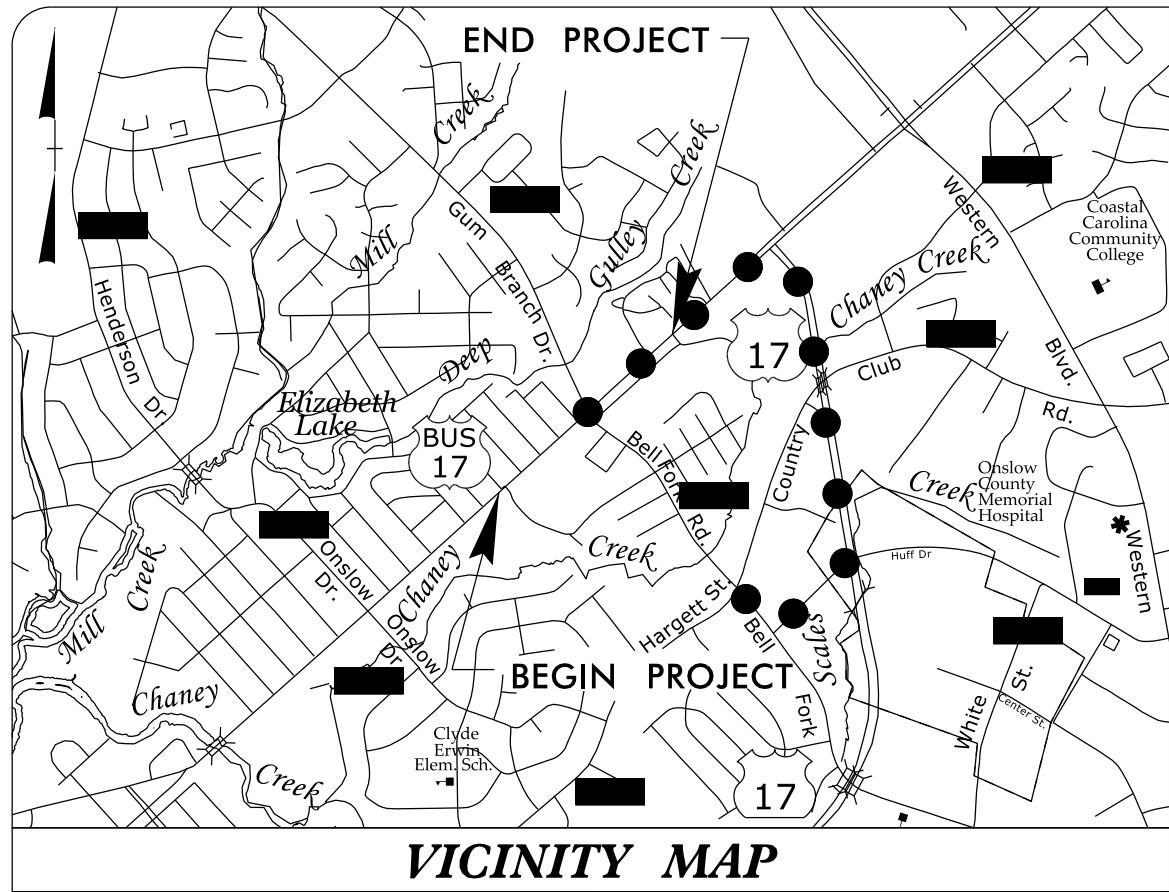

OFF SITE DETOUR ● ● ●

BEGIN TIP PROJECT U-5728
-L- STA. 9 + 00.00

BEGIN RESURFACING
-L- STA 10 + 00.00

BEGIN RESURFACING
BEGIN CONSTRUCTION
-Y1- STA 11 + 00.00

END PROJECT
-Y1- STA 7 + 87.87

END TIP PROJECT U-5728
-L- STA. 39 + 35.21

END RESURFACING
BEGIN WIDENING
BEGIN OVERLAY
-L- STA 12 + 85.00

END RESURFACING
BEGIN OVERLAY
-Y1- STA 12 + 68.10

BEGIN RESURFACING
BEGIN CONSTRUCTION
-Y2- STA 11 + 33.04

BEGIN RESURFACING
END OVERLAY
-Y1- STA 19 + 20.51

END RESURFACING
-L- STA 36 + 30.00

END RESURFACING
END CONSTRUCTION
-Y1- STA 21 + 50.00

THIS IS NOT A CONTROL OF ACCESS PROJECT
THIS PROJECT IS WITHIN THE JACKSONVILLE MUNICIPAL BOUNDARIES.
DESIGN EXCEPTION REQUIRED FOR -Y1- MIN. HORIZONTAL CURVE RADII; -Y1- PAVEMENT CROSS SLOPE

LENGTH ROADWAY TIP PROJECT U-5728 = 0.575 MILES
LENGTH STRUCTURE TIP PROJECT U-5728 = 0.000 MILES
TOTAL LENGTH OF TIP PROJECT U-5728 = 0.575 MILES

GRAPHIC SCALE



DATUM DESCRIPTION

THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT
IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY
NCGS FOR MONUMENT "U4007-3"
WITH NAD 83/NA 2001 STATE PLANE GRID COORDINATES OF
NORTHING: 376224.375(ft) EASTING: 2480992.509(ft)
ELEVATION: 38.81(ft)
THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT
(GROUND TO GRID) IS: 0.99911272
THE N.C. LAMBERT GRID BEARING AND
LOCALIZED HORIZONTAL GROUND DISTANCE FROM
"U4007-3" TO -L- STATION 9+00 IS
S48-30°27.8"W 4693.14(ft)
ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES
VERTICAL DATUM USED IS NAVD 88

Prepared in the Office of:


LOCATION AND SURVEYS
DIVISION 2

2024 STANDARD SPECIFICATIONS

RIGHT OF WAY DATE:
03/03/2018

LETTING DATE:
09/15/2026

PROFESSIONAL LAND
SURVEYOR

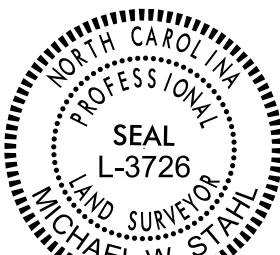

DocuSigned by:
Michael Stahl
3ABCF22A5E7D43D...

04/09/2026
Date:

