




1. FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DIVISION TRAFFIC ENGINEER AT (828) 250-3035 TO ARRANGE FOR NCDOT TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
2. CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE PLANS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE PLANS.
3. PRIOR TO REMOVAL OF ANY EXISTING FIBER OPTIC CABLE AND ONCE THE NEW SIGNAL SYSTEM FIBER OPTIC CABLE NETWORK HAS BEEN INSTALLED BETWEEN SPLICE ENCLOSURES "S1" AND "S5", CUTOVER TO THE NEW FIBER AT SPLICE ENCLOSURES "S1", "S2", "S3", "S4", AND "S5". CUTTING OVER TO THE NEW FIBER OPTIC CABLE SHALL NOT EXCEED 24 HOURS (SEE ICT). CUTTING OVER TO THE NEW FIBER OPTIC CABLE IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL AND THE CCTV IS OPERATING ON THE NETWORK.

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

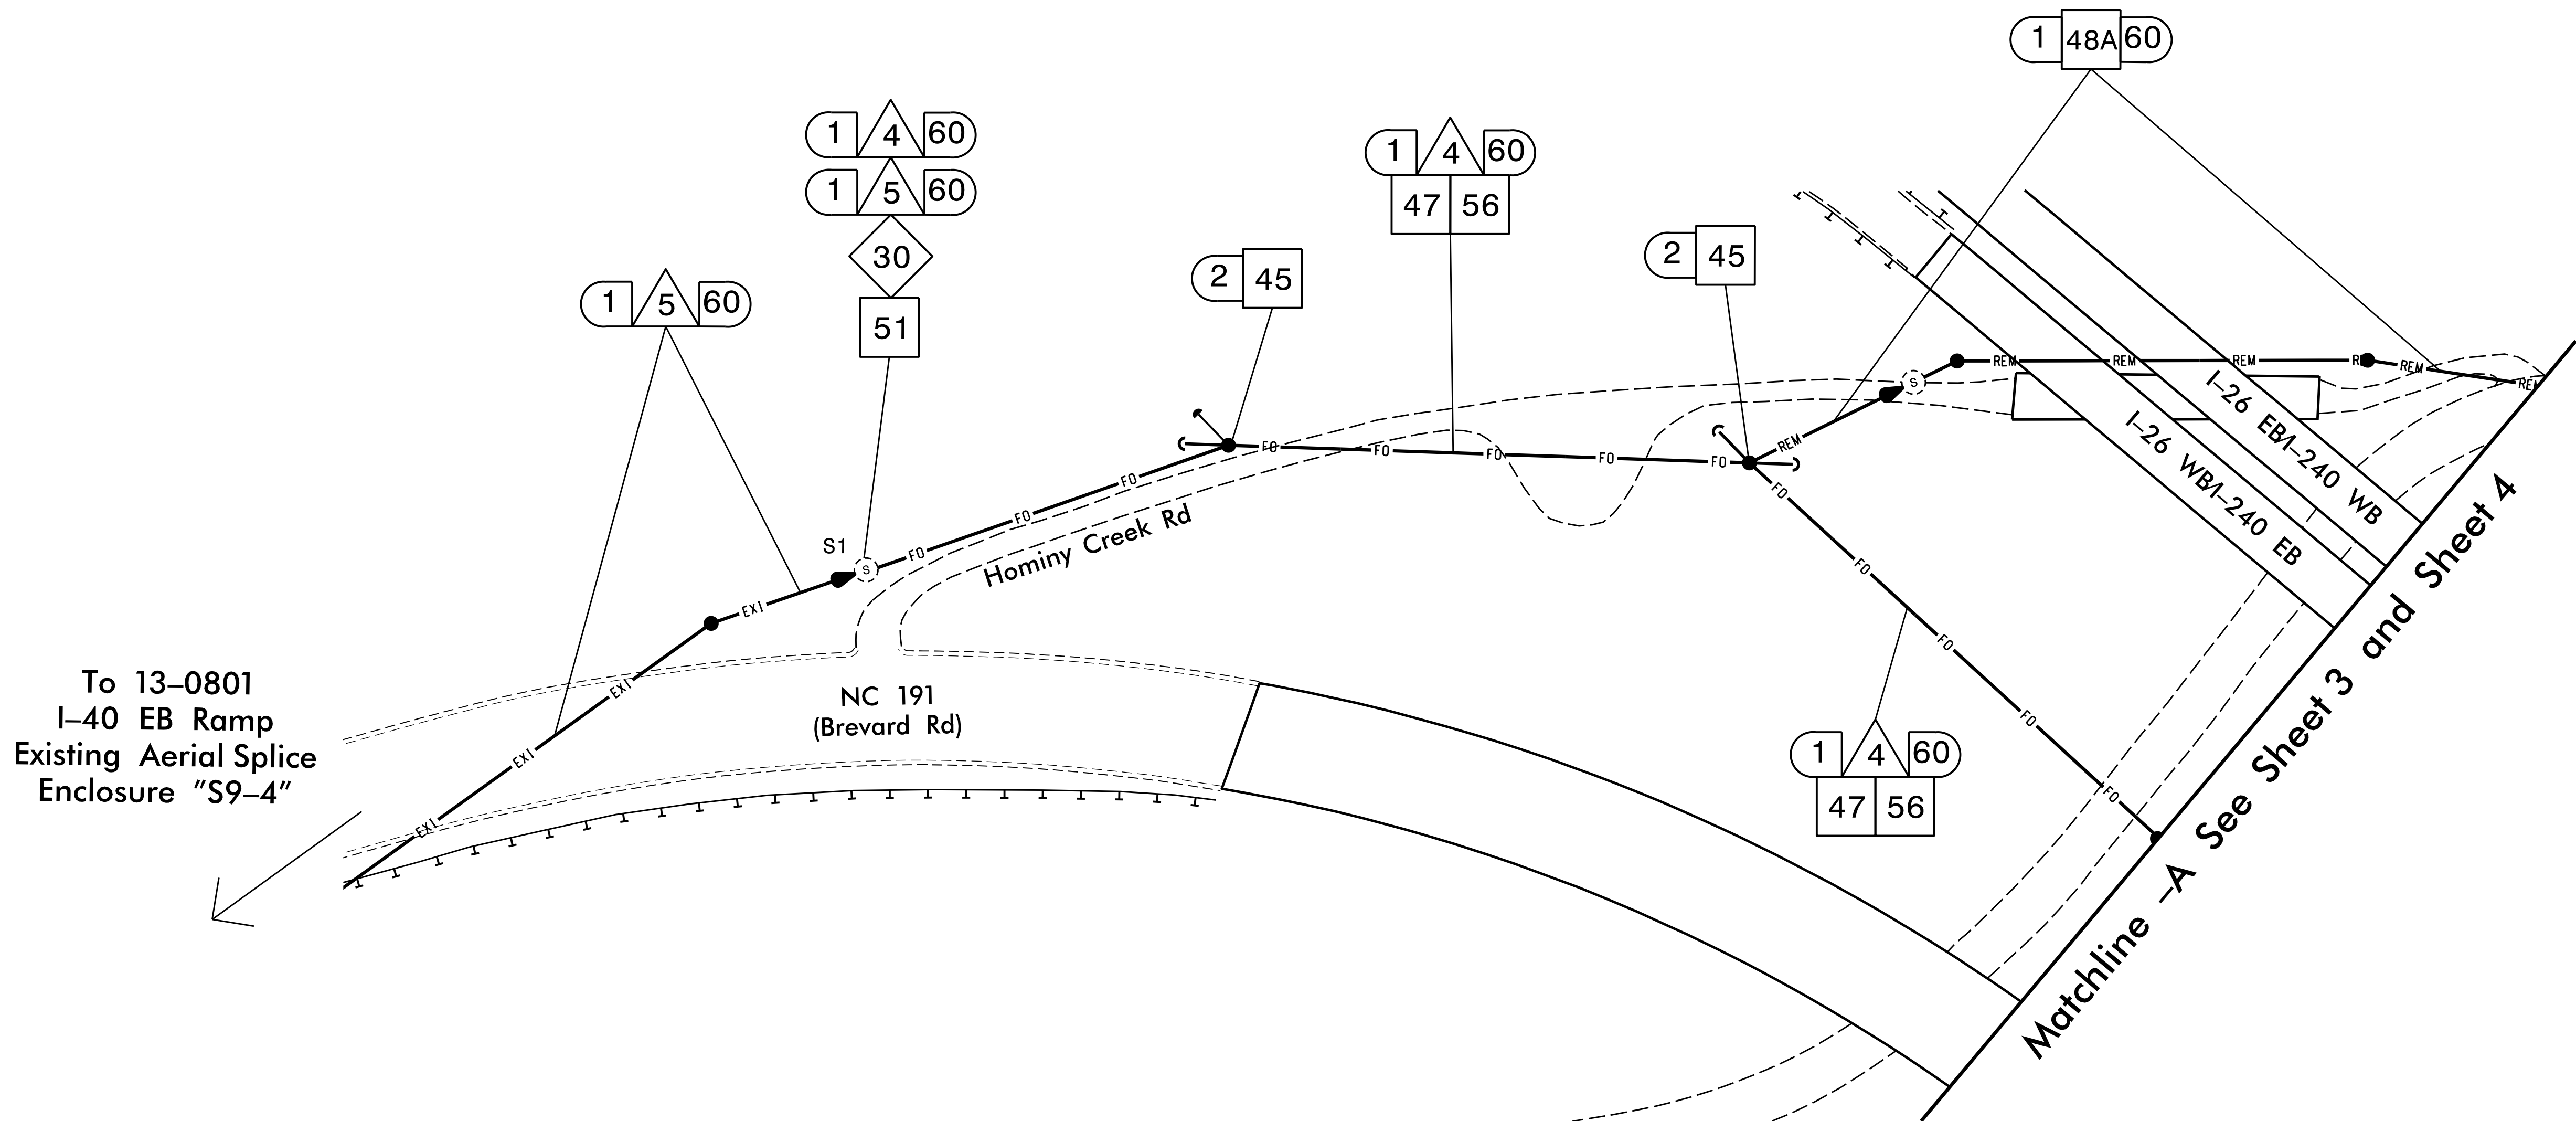

DIVISION 13		BUNCOMBE CO.		ASHEVILLE	
PLAN DATE: November 2025		REVIEWED BY: M. Cavanaugh			
PREPARED BY: M. Tindal		REVIEWED BY: R. Garrett			

[illegible]