

REFERENCE: I-2513AC

PROJECT: 34165

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-5	PROFILE
6-18	BORE LOGS
19	SOIL TEST RESULTS

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY BUNCOMBE
PROJECT DESCRIPTION I-26I-40I-240 INTERCHANGE
TO SR 3548 (HAYWOOD ROAD)

SITE DESCRIPTION RETAINING WALL NO.15
-WALL15- STA. 10 + 73.43 (-Y3RPA- STA. 22 + 48.19) TO
-WALL15- STA. 23 + 45.91 (-L- STA. 98 + 25.00)

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	I-2513AC	1	19

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT, AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO PERFORM INDEPENDENT SUBSURFACE INVESTIGATIONS AND MAKE INTERPRETATIONS AS NECESSARY TO CONFIRM CONDITIONS ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

A. BLACKMORE

A. WEST

C. OSBORNE

TOTAL DEPTH DRILLING

INVESTIGATED BY ECS SOUHEAST, LLC

DRAWN BY A. SUTTLE, P.G.

CHECKED BY M. MULLA, P.E.

SUBMITTED BY ECS SOUTHEAST, LLC

DATE SEPTEMBER 2024

Prepared in the Office of:



ECS SOUTHEAST, LLC
1812 CENTER PARK DRIVE, SUITE D
CHARLOTTE, NC 28217
(704) 525-5152 [PHONE]
(704) 357-0023 [FAX]
NC REGISTERED
ENGINEERING
FIRM # F-1519




Signed by: Amanda R. Suttle, P.G. 6/30/2026
BDAF14CEC SIGNATURE DATE


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

PROJECT REFERENCE NO.	SHEET NO.
I-2513AC	3
SITE PLAN	
0 100 200 FEET	
RETAINING WALL #15 -WALL15- POT STA. 10+73.43 TO 23+45.91	


BEGIN RETAINING WALL #15
-WALL15- POT STA.10+73.43
-Y3RPA- STA.22+48.19 (31.50' RT)

END RETAINING WALL NO.15
-WALL15- POT STA.23+45.91
-L- STA.98+25.00 (81.00' RT)

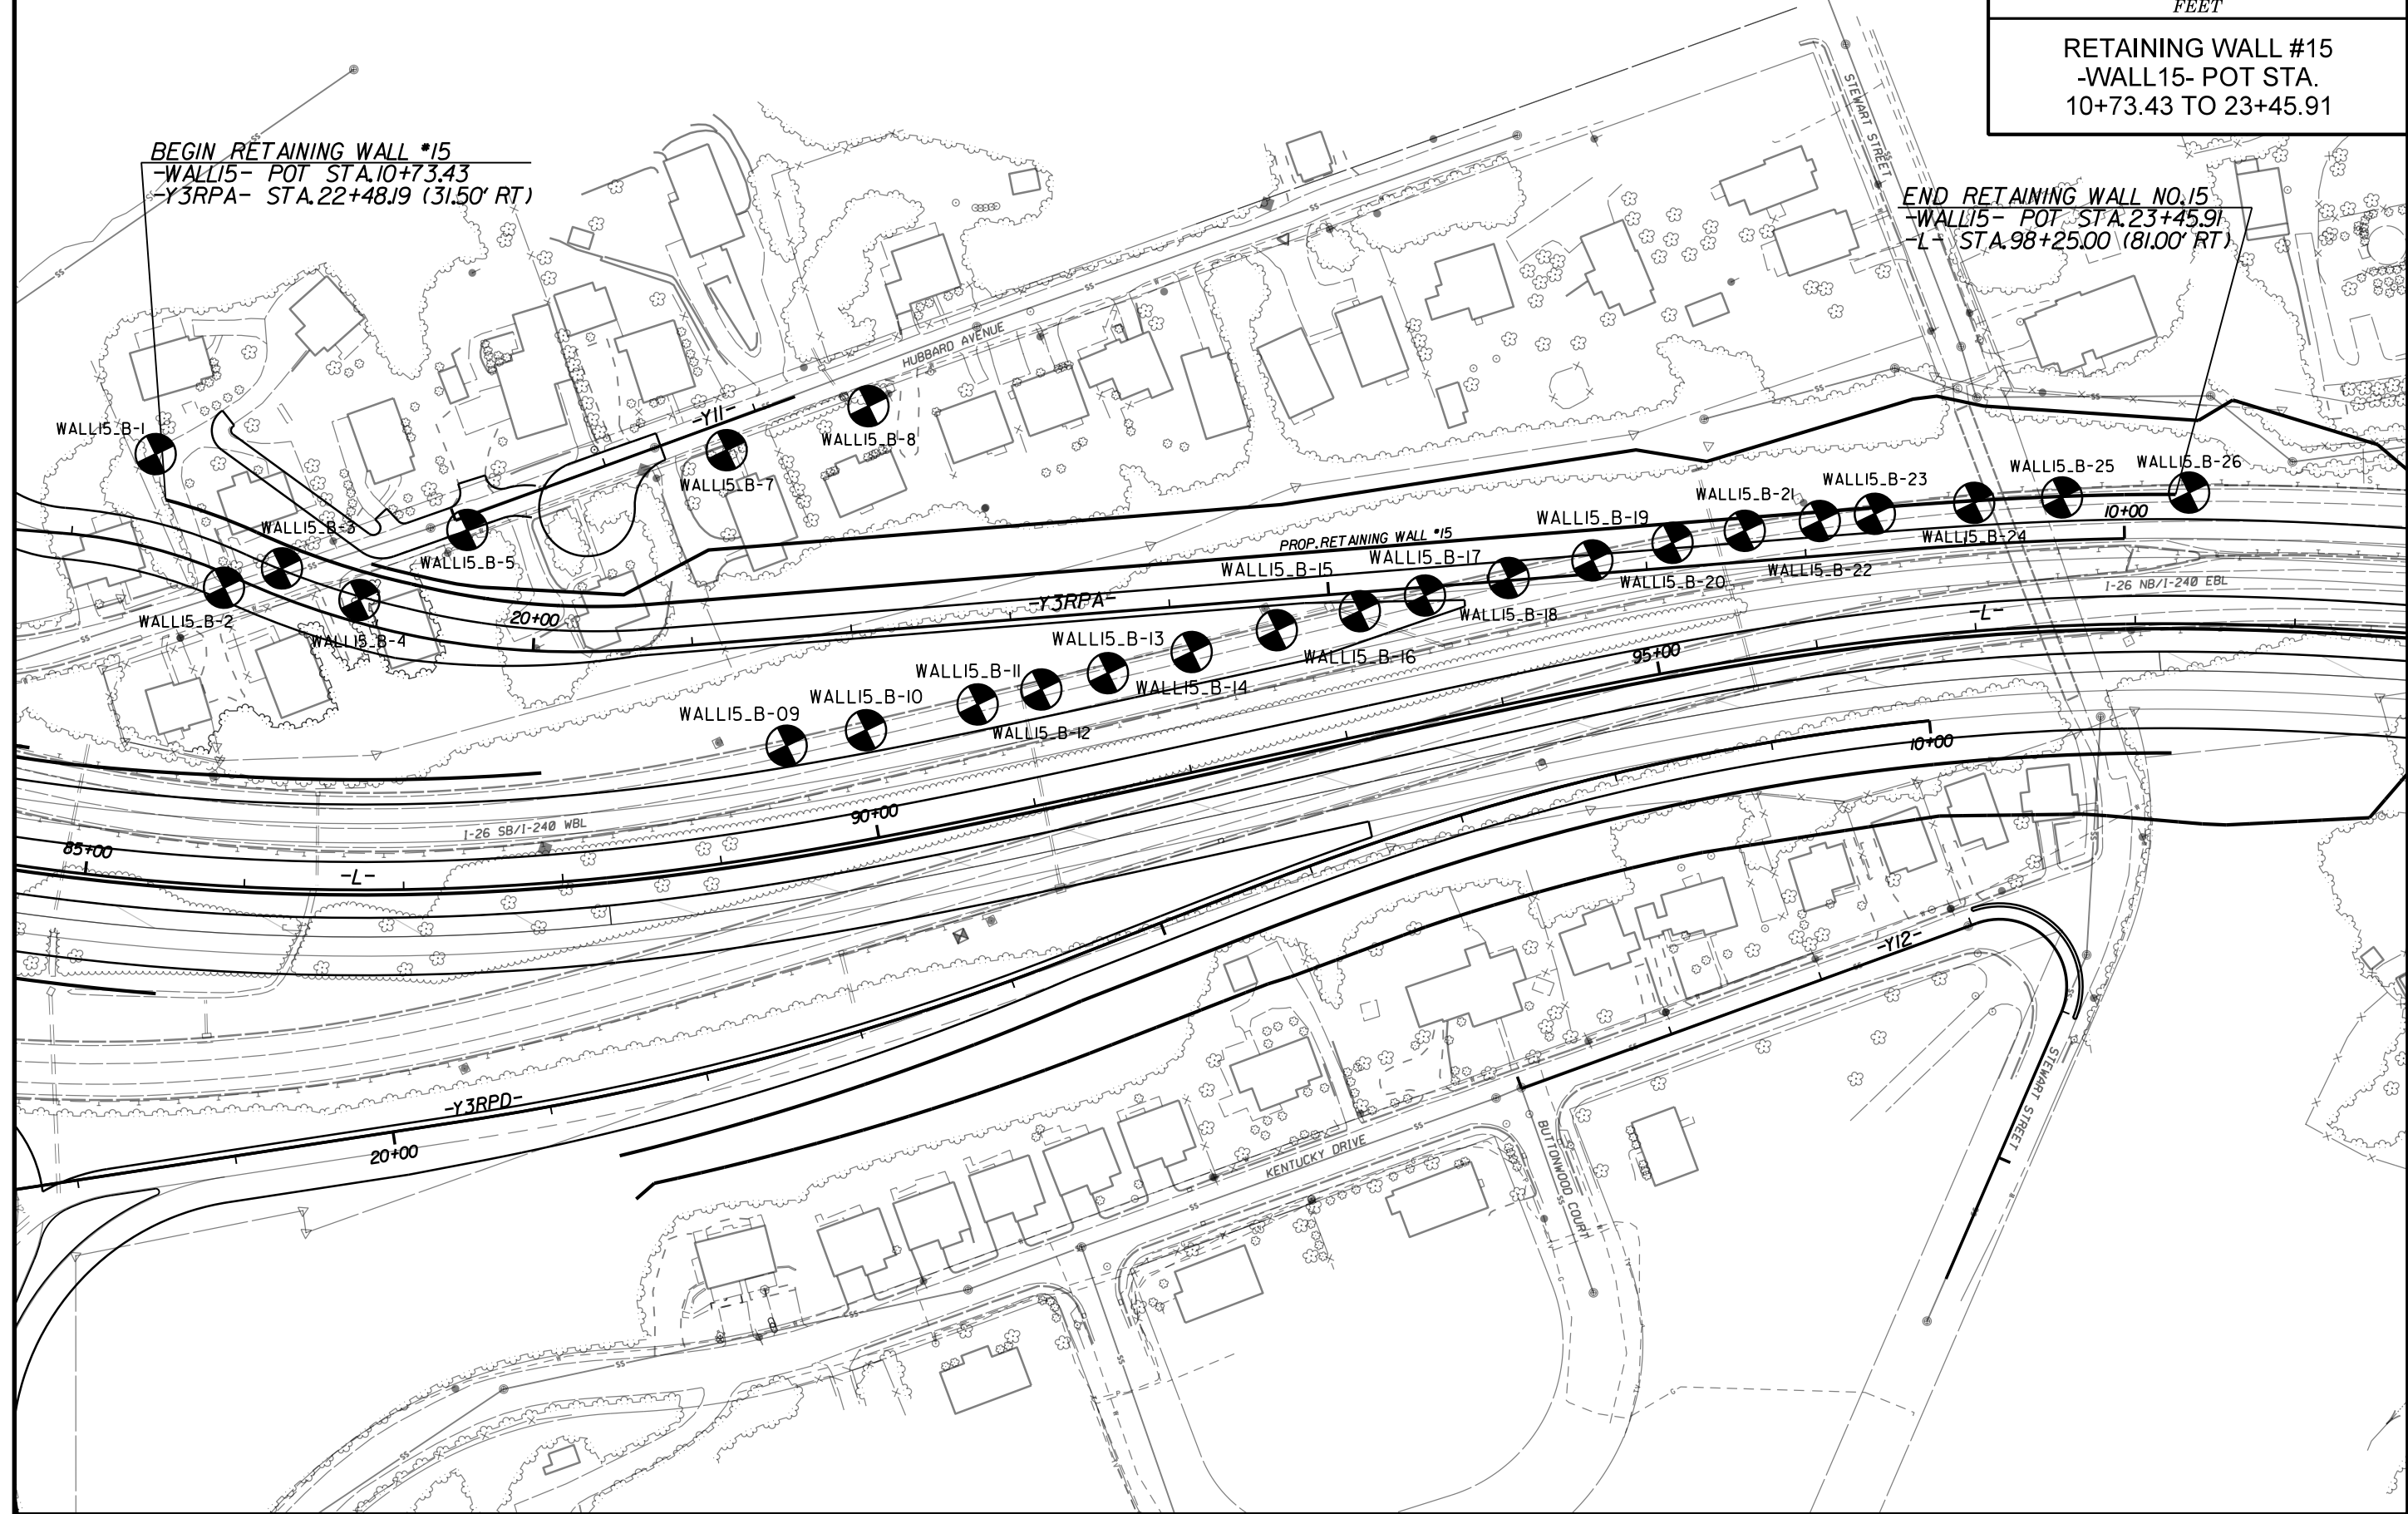





-WALL15-

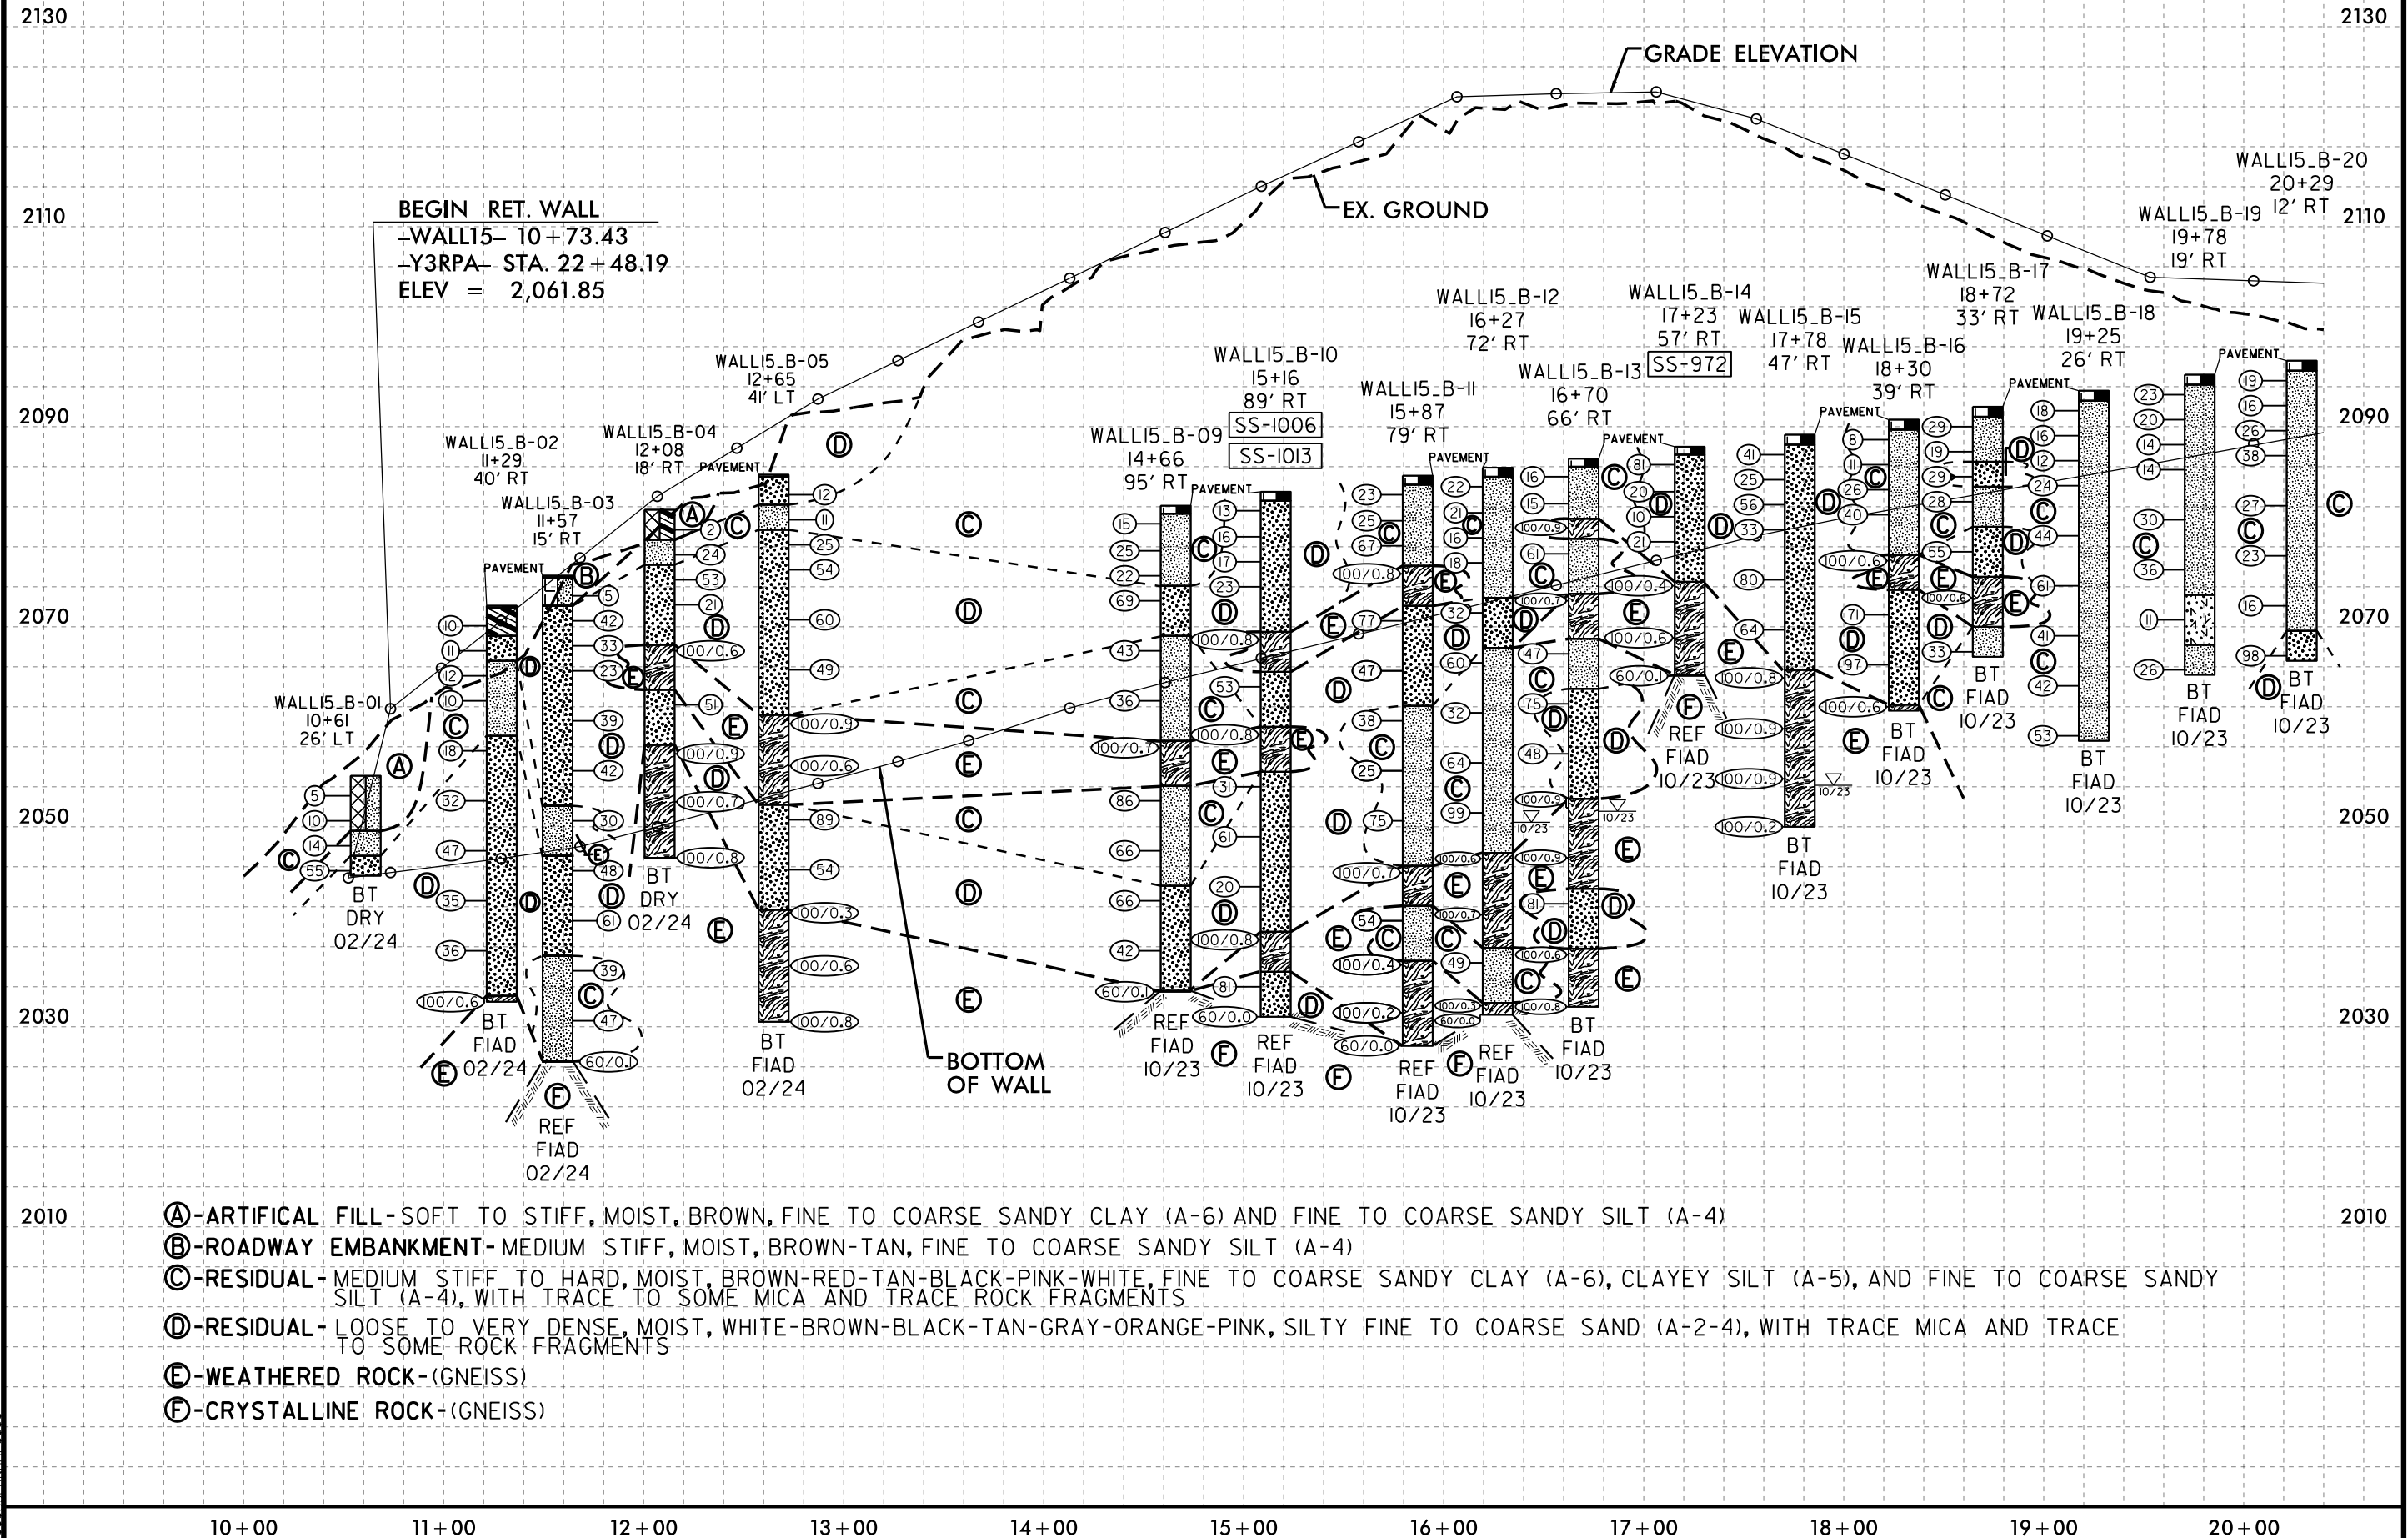

01-OCT-2024 09:29
C:\Users\rothOneDrive - ECS Corporate Services\31-4489 I-25I3AC 12 Structures\CADD_GEOTECH\Sites&Sub\I25I3AC_GEO_PWAL\5_PFL.dgn



-WALL15-

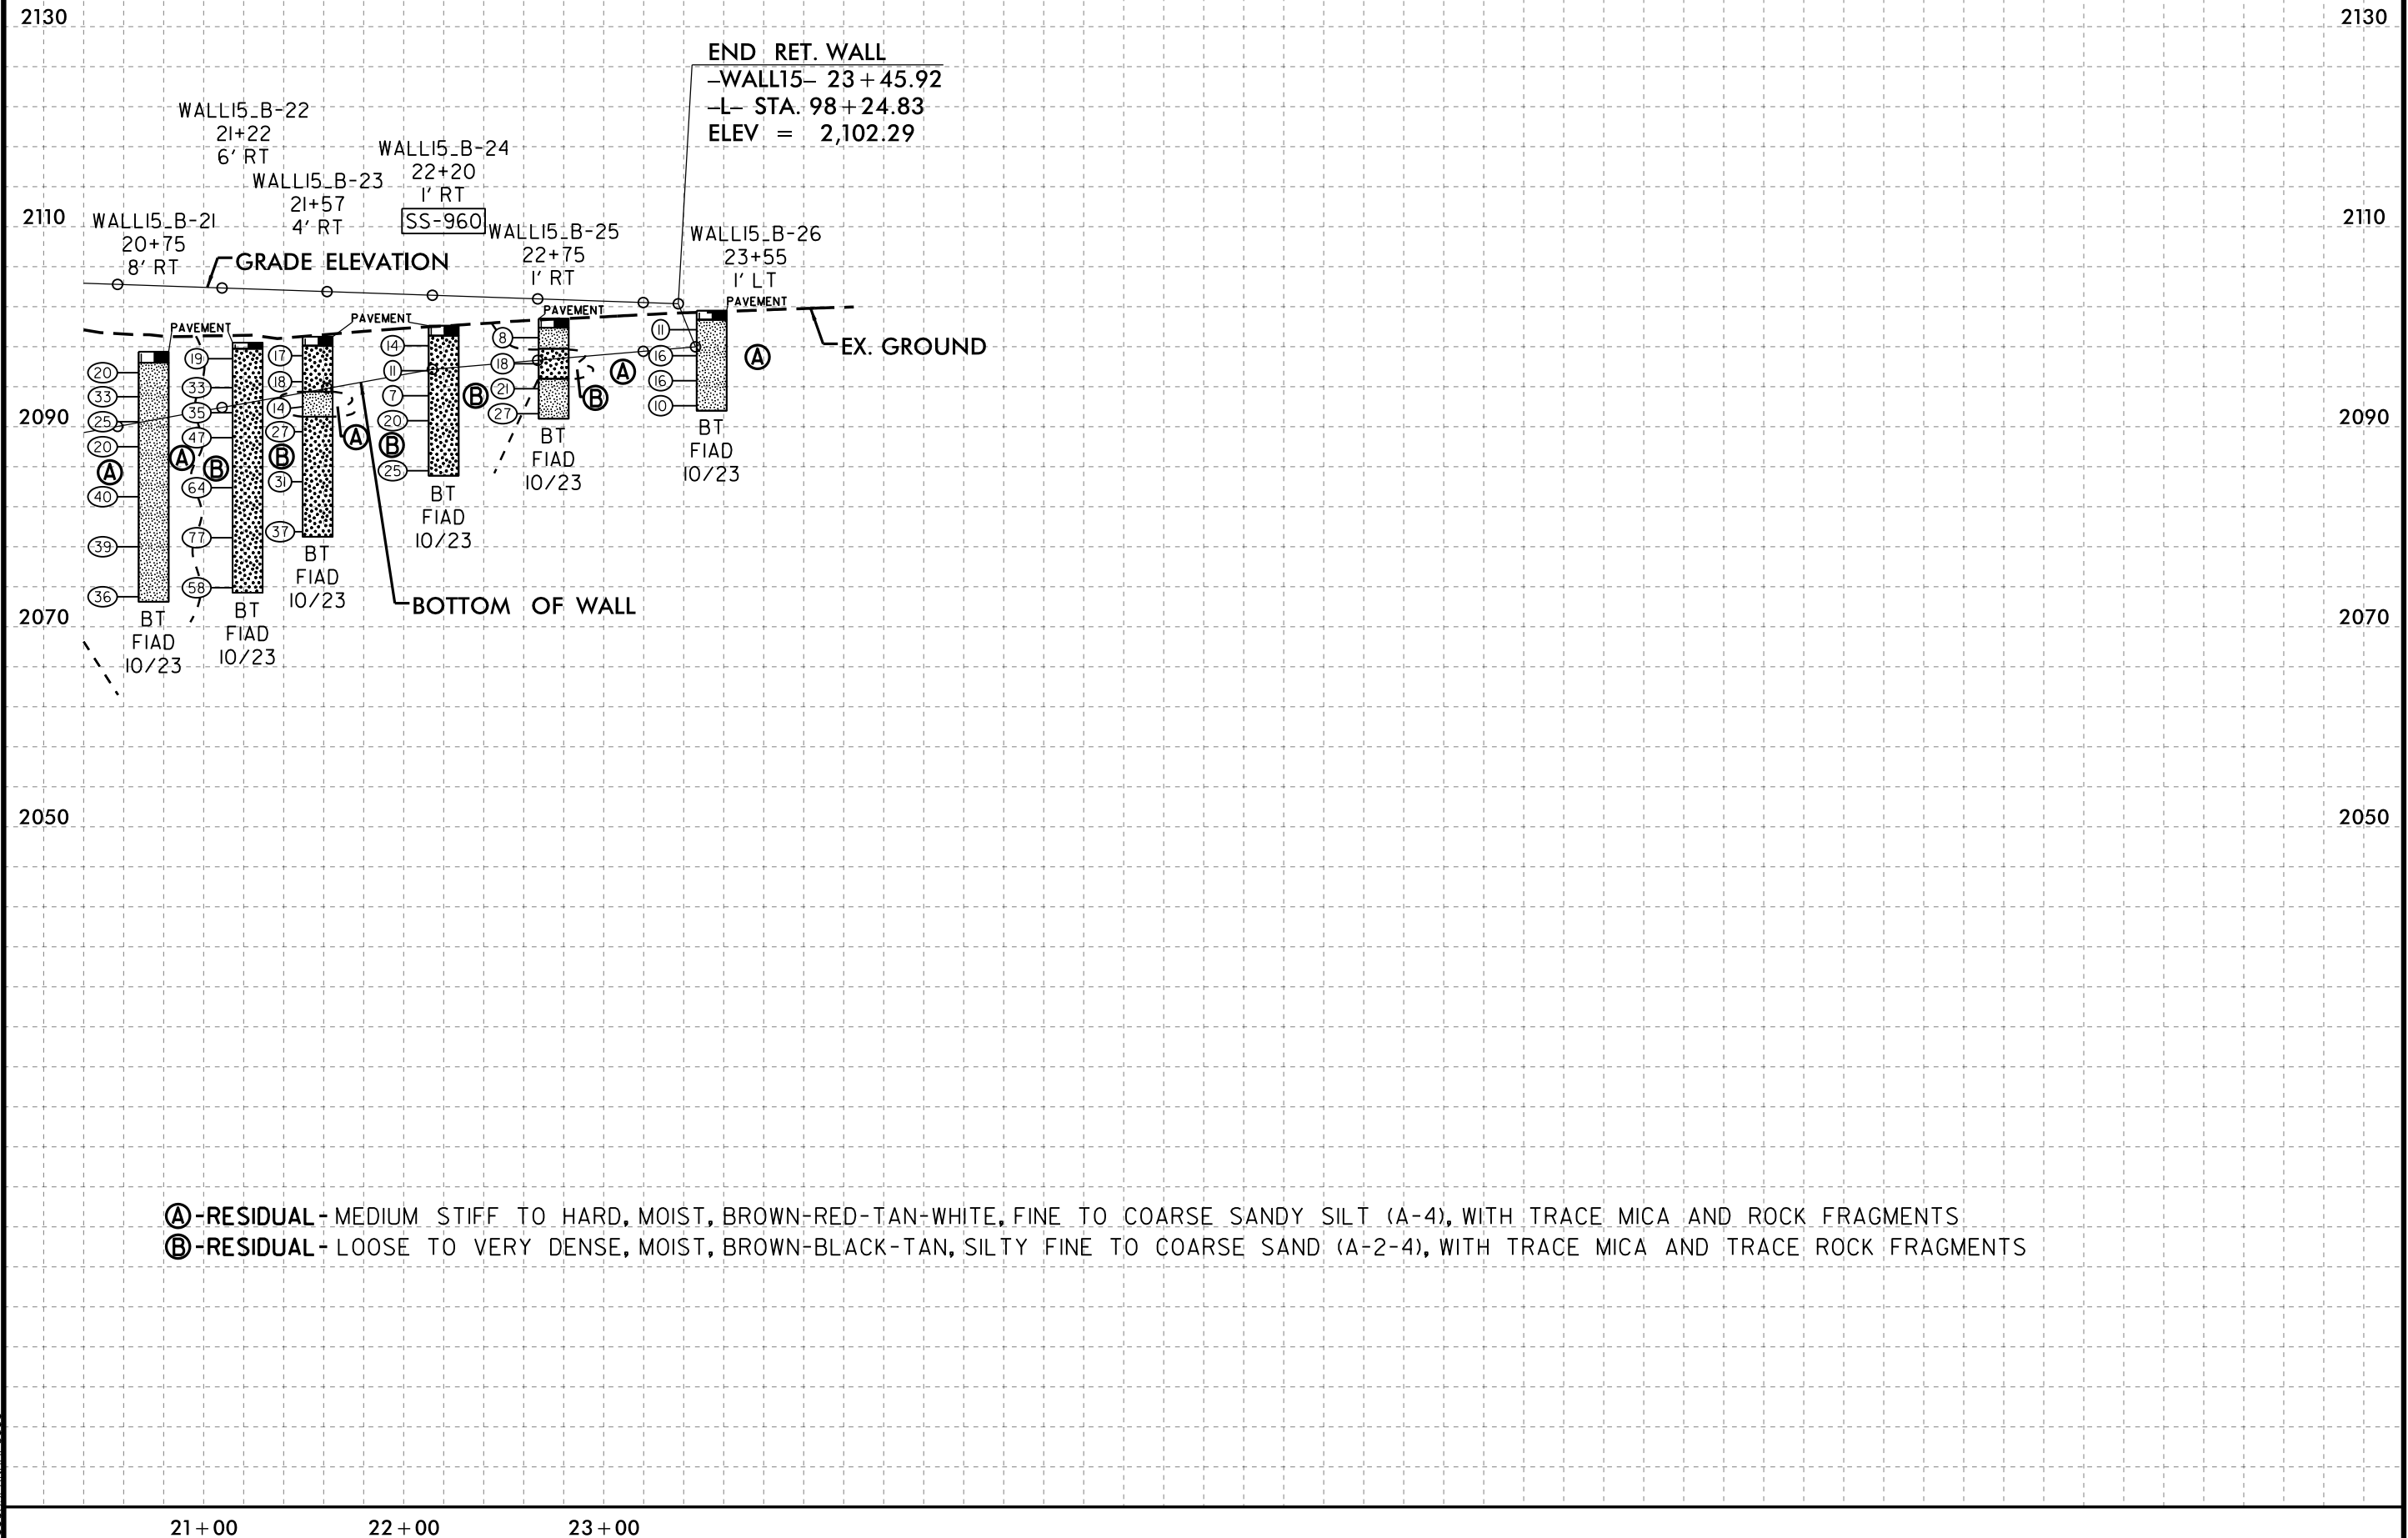


①-RESIDUAL - MEDIUM STIFF TO HARD, MOIST, BROWN-RED-TAN-WHITE, FINE TO COARSE SANDY SILT (A-4), WITH TRACE MICA AND ROCK FRAGMENTS

②-RESIDUAL - LOOSE TO VERY DENSE, MOIST, BROWN-BLACK-TAN, SILTY FINE TO COARSE SAND (A-2-4), WITH TRACE MICA AND TRACE ROCK FRAGMENTS

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34165.1.13				TIP I-2513AC				COUNTY BUNCOMBE				GEOLOGIST A. Blackmore					
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00												GROUND WTR (ft)					
BORING NO. WALL15_B-01				STATION 10+61				OFFSET 26 ft LT				ALIGNMENT -WALL15-				0 HR. Dry	
COLLAR ELEV. 2,055.1 ft				TOTAL DEPTH 10.0 ft				NORTHING 681,108				EASTING 933,590				24 HR. Dry	
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021								DRILL METHOD H.S. Augers				HAMMER TYPE Automatic					
DRILLER D. Hamilton				START DATE 02/23/24				COMP. DATE 02/23/24				SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)		
2060																	
2055																	
2050	2,054.1	1.0		2	2	3									2,055.1	GROUND SURFACE 0.0	
	2,051.6	3.5		2	4	6						M				ARTIFICIAL FILL Medium Stiff to Stiff, Brown, Fine to Coarse Sandy SILT (A-4)	
	2,049.1	6.0		8	9	5						M			2,049.6	5.5	
	2,046.6	8.5		39	35	20						M			2,047.1	RESIDUAL Stiff, Brown-Red, Fine to Coarse Sandy SILT (A-4) 8.0	
														2,045.1	Very Dense, White-Brown, Silty Fine to Coarse SAND (A-2-4), with trace rock fragments 10.0		
														Boring Terminated at Elevation 2,045.1 ft In Residual Silty SAND (A-2-4)			
														Gravel from 0.0 to 0.2 feet.			

[illegible]

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34165.1.13						TIP I-2513AC						COUNTY BUNCOMBE						GEOLOGIST A. Blackmore							
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00																		GROUND WTR (ft)							
BORING NO. WALL15_B-03						STATION 11+57						OFFSET 15 ft RT						ALIGNMENT -WALL15-						0 HR. Dry	
COLLAR ELEV. 2,075.1 ft						TOTAL DEPTH 48.6 ft						NORTHING 681,148						EASTING 933,689						24 HR. FIAD	
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021												DRILL METHOD H.S. Augers						HAMMER TYPE Automatic							
DRILLER D. Hamilton						START DATE 02/26/24						COMP. DATE 02/26/24						SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION											
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						ELEV. (ft)	DEPTH (ft)								
2080																									
2075																									
2070	2,074.1	1.0		2	2	3									GROUND SURFACE										
	2,071.6	3.5		13	23	19							M		ROADWAY EMBANKMENT Asphalt (0.2')										
2065	2,069.1	6.0		13	15	18							M		Medium Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4)										
	2,066.6	8.5		18	14	9							M		RESIDUAL Medium Dense to Dense, Brown-Tan-White, Silty Fine to Coarse SAND (A-2-4)										
2060	2,061.6	13.5		33	26	13							M												
	2,056.6	18.5		12	16	26							M												
2055	2,051.6	23.5		9	12	18							M												
	2,046.6	28.5		22	30	18							M		2,052.1 Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica										
2045	2,041.6	33.5		10	21	40							M		2,047.1 Dense to Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4)										
	2,036.6	38.5		8	20	19							M		2,047.1 Dense to Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4)										
2035	2,031.6	43.5		19	25	22							M		2,037.1 Hard, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace to some mica										
	2,026.6	48.5	60/0.1										M		2,037.1 Hard, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace to some mica										
2030															2,026.6										
															2,026.5										
															CRYSTALLINE ROCK Brown-White (GNEISS)										
															Boring Terminated with Standard Penetration Test Refusal at Elevation 2,026.5 ft In Crystalline Rock (GNEISS)										

WBS 34165.1.13		TIP I-2513AC		COUNTY BUNCOMBE		GEOLOGIST A. Blackmore								
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00								GROUND WTR (ft)						
BORING NO. WALL15_B-04		STATION 12+08		OFFSET 18 ft RT		ALIGNMENT -WALL15-		0 HR.	Dry					
COLLAR ELEV. 2,081.7 ft		TOTAL DEPTH 34.8 ft		NORTHING 681,183		EASTING 933,728		24 HR.	Dry					
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021				DRILL METHOD H.S. Augers			HAMMER TYPE Automatic							
DRILLER D. Hamilton			START DATE 02/26/24		COMP. DATE 02/26/24		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2085														
2080	2,080.7	1.0												2,081.7 GROUND SURFACE 0.0
2075	2,078.2	3.5	1	1	1								M	ARTIFICIAL FILL Soft, Brown, Fine to Coarse Sandy CLAY (A-6) 3.0
	2,075.7	6.0	5	13	11								M	RESIDUAL Very Stiff, Red-Brown, Fine to Coarse Sandy SILT (A-4) 5.5
	2,073.2	8.5	4	15	38								M	Medium Dense to Very Dense, Tan-Brown, Silty Fine to Coarse SAND (A-2-4), with trace rock fragments
2070	2,068.2	13.5	8	12	9								M	
			40	60/0.1										2,068.2 WEATHERED ROCK 13.5 Gray (GNEISS)
2065	2,063.2	18.5	27	21	30								M	RESIDUAL Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4), with trace rock fragments 18.0
2060	2,058.2	23.5	45	55/0.4										2,058.2 WEATHERED ROCK 23.5 Gray (GNEISS)
	2,053.2	28.5	75	25/0.2										
2050	2,048.2	33.5	23	49	51/0.3									2,046.9 Boring Terminated at Elevation 2,046.9 ft In Weathered Rock (GNEISS) 34.8
														Surficial Organic Soil from 0.0 to 0.1 feet.

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS		34165.1.13		TIP		I-2513AC		COUNTY		BUNCOMBE		GEOLOGIST		A. Blackmore											
SITE DESCRIPTION													RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00			GROUND WTR (ft)									
BORING NO.		WALL15_B-07		STATION		14+43		OFFSET		93 ft LT		ALIGNMENT		-WALL15-		0 HR.	Dry								
COLLAR ELEV.		2,101.6 ft		TOTAL DEPTH		29.2 ft		NORTHING		681,431		EASTING		933,744		24 HR.	FIAD								
DRILL RIG/HAMMER EFF./DATE								TDD417 CME75 82.7% 06/15/2021				DRILL METHOD				H.S. Augers		HAMMER TYPE		Automatic					
DRILLER				D. Hamilton				START DATE				02/27/24		COMP. DATE				02/27/24		SURFACE WATER DEPTH				N/A	
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION											
			0.5ft	0.5ft	0.5ft	0	25	50	75	100															
2105																									
2100	2,100.6	1.0																							
2095	2,098.1	3.5	12	34	43							M		GROUND SURFACE											
	2,095.6	6.0	6	24	26							M		ROADWAY EMBANKMENT											
	2,093.1	8.5	23	49	51/0.2							M		Asphalt (0.2')											
2090	2,088.1	13.5	18	28	21							M		RESIDUAL											
	2,083.1	18.5	52	48/0.1								M		Very Dense, Tan-White, Silty Fine to Coarse SAND (A-2-4)											
2085	2,078.1	23.5	52	48/0.3								M		WEATHERED ROCK											
	2,073.1	28.5	57	43/0.2								M		Tan-Gray (GNEISS)											
2080														RESIDUAL											
2075														Dense to Very Dense, Tan-Brown, Silty Fine to Coarse SAND (A-2-4)											
														WEATHERED ROCK											
														Tan-Brown (GNEISS)											
														Boring Terminated at Elevation 2,072.4 ft In Weathered Rock (GNEISS)											

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore						
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00											GROUND WTR (ft)				
BORING NO. WALL15_B-08			STATION 15+33			OFFSET 113 ft LT			ALIGNMENT -WALL15-			0 HR. Dry			
COLLAR ELEV. 2,102.2 ft			TOTAL DEPTH 34.1 ft			NORTHING 681,523			EASTING 933,758			24 HR. FIAD			
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers				HAMMER TYPE Automatic					
DRILLER D. Hamilton			START DATE 02/27/24			COMP. DATE 02/27/24			SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)
2105															
2100	2,101.2	1.0	13	9	9									2,102.2	0.0
2095	2,098.7	3.5	8	15	15							M		ROADWAY EMBANKMENT Asphalt (0.2')	
	2,096.2	6.0	7	12	12							M		RESIDUAL Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica	
	2,093.7	8.5	9	23	34							M		2,094.2	
2090												M		Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4), with trace mica	
2085	2,088.7	13.5	8	57	43/0.2									2,088.2	14.0
2080	2,083.7	18.5	15	14	13							M		2,084.2	18.0
2075	2,078.7	23.5	22	70	30/0.1									2,078.2	24.0
2070	2,073.7	28.5	75	25/0.1											
	2,068.7	33.5	45	55/0.1										2,068.1	34.1
														Boring Terminated at Elevation 2,068.1 ft In Weathered Rock (GNEISS)	

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore					
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00									GROUND WTR (ft)					
BORING NO. WALL15_B-09			STATION 14+66			OFFSET 95 ft RT			ALIGNMENT -WALL15-			0 HR. Dry		
COLLAR ELEV. 2,082.1 ft			TOTAL DEPTH 48.6 ft			NORTHING 681,384			EASTING 933,927			24 HR. FIAD		
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic					
DRILLER D. Hamilton			START DATE 10/11/23			COMP. DATE 10/11/23			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2085														
	2,081.3	0.8	10	7	8									2,082.1 GROUND SURFACE 0.0
2080	2,078.6	3.5	7	10	15								M	2,081.3 ROADWAY EMBANKMENT 0.8
	2,076.1	6.0	4	8	14								M	RESIDUAL
2075	2,073.6	8.5	23	30	39								M	Stiff to Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace rock fragments
	2,068.6	13.5	13	24	19								M	2,074.1 Very Dense, Tan-Brown, Silty Fine to Coarse SAND (A-2-4), with trace rock fragments 8.0
2065	2,063.6	18.5	8	10	26								M	2,069.1 Hard, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica 13.0
2060	2,058.6	23.5	92	8/0.2									M	2,058.6 WEATHERED ROCK 23.5
	2,053.6	28.5	15	26	60								M	2,054.1 RESIDUAL 28.0
2050	2,048.6	33.5	16	36	45								M	Hard, Black-Brown, Fine to Coarse Sandy SILT (A-4), with trace mica and rock fragments
2045	2,043.6	38.5	11	26	40								M	2,044.1 Dense to Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4), with trace mica and rock fragments 38.0
2040	2,038.6	43.5	36	19	23								M	
2035	2,033.6	48.5	60/0.1										M	2,033.6 CRYSTALLINE ROCK (GNEISS) 48.5
														2,033.5 Boring Terminated with Standard Penetration Test Refusal at Elevation 2,033.5 ft In Crystalline Rock (GNEISS) 48.6

NCDOT BORE DOUBLE 12513AC_GEO_GTM.GPJ NC_DOT.GDT 10/1/24

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore							
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00									GROUND WTR (ft)							
BORING NO. WALL15_B-11			STATION 15+87			OFFSET 79 ft RT			ALIGNMENT -WALL15-			0 HR. Dry				
COLLAR ELEV. 2,085.1 ft			TOTAL DEPTH 57.0 ft			NORTHING 681,503			EASTING 933,956			24 HR. FIAD				
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic							
DRILLER D. Hamilton			START DATE 10/10/23			COMP. DATE 10/11/23			SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2090																
2085																
	2,084.2	0.9		6	10	13		23					M	2,085.1 GROUND SURFACE 0.0		
													M	2,084.2 ROADWAY EMBANKMENT 0.9		
	2,081.6	3.5		7	11	14									Asphalt (0.5'), Stonebase (0.4')	
2080															RESIDUAL	
	2,079.1	6.0		11	22	45							M		Very Stiff to Hard, Brown-Tan, Fine to Coarse Sandy SILT (A-4)	
	2,076.6	8.5		16	46	54/0.3			67							
2075															2,076.1 WEATHERED ROCK 9.0	
															Tan-Gray (GNEISS)	
	2,071.6	13.5		9	19	58							M		2,072.1 RESIDUAL 13.0	
2070															Dense to Very Dense, Tan-Brown, Silty Fine to Coarse SAND (A-2-4)	
	2,066.6	18.5		8	18	29							M			
2065																
	2,061.6	23.5		11	16	22							M		2,062.1 Very Stiff to Hard, Brown, Fine to Coarse Sandy SILT (A-4), with trace mica and rock fragments 23.0	
2060																
	2,056.6	28.5		9	14	11							M			
2055																
	2,051.6	33.5		16	25	50							M			
2050																
	2,046.6	38.5		15	25	75/0.2									2,046.1 WEATHERED ROCK 39.0	
2045															Orange-Brown (GNEISS)	
	2,041.6	43.5		11	20	34							M		2,042.1 RESIDUAL 43.0	
2040															Hard, Black-Brown, Fine to Coarse Sandy SILT (A-4), with trace mica	
	2,036.6	48.5		100/0.4											2,036.6 WEATHERED ROCK 48.5	
2035															Brown (GNEISS)	
	2,031.6	53.5		100/0.2												
2030																
	2,028.1	57.0		60/0.0											2,028.1 Boring Terminated with Standard Penetration Test Refusal at Elevation 2,028.1 ft On Crystalline Rock (GNEISS) 57.0	

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore						
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00									GROUND WTR (ft)						
BORING NO. WALL15_B-12			STATION 16+27			OFFSET 72 ft RT			ALIGNMENT -WALL15-			0 HR.	35.4		
COLLAR ELEV. 2,085.9 ft			TOTAL DEPTH 54.7 ft			NORTHING 681,543			EASTING 933,965			24 HR.	FIAD		
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic						
DRILLER D. Hamilton			START DATE 10/10/23			COMP. DATE 10/10/23			SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)
2090															
2085	2,085.0	0.9	9	11	11									2,085.9 GROUND SURFACE 0.0	
														2,085.0 ROADWAY EMBANKMENT 0.9	
	2,082.4	3.5	4	11	10									RESIDUAL	
2080	2,079.9	6.0	4	7	9									Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica	
	2,077.4	8.5	5	9	9										
2075															
	2,072.4	13.5	5	17	15									2,072.9 Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4) 13.0	
2070															
	2,067.4	18.5	10	24	36									2,067.9 Hard, Brown-Tan, Fine to Coarse Sandy SILT (A-4) 18.0	
2065															
	2,062.4	23.5	16	15	17										
2060															
	2,057.4	28.5	16	28	36										
2055															
	2,052.4	33.5	15	31	68										
2050															
	2,047.4	38.5	49	51/0.1										2,047.4 WEATHERED ROCK 38.5	
2045														Gray-Tan (GNEISS)	
	2,042.4	43.5	32	45	55/0.2										
2040															
	2,037.4	48.5	16	18	31									2,037.9 RESIDUAL 48.0	
2035														Hard, Brown, Fine to Coarse Sandy SILT (A-4), with trace mica	
	2,032.4	53.5												2,032.4 WEATHERED ROCK 53.5	
	2,031.2	54.7	100/0.3											Brown (GNEISS) 54.7	
			60/0.0											Boring Terminated with Standard Penetration Test Refusal at Elevation 2,031.2 ft On Crystalline Rock (GNEISS)	

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore					
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00									GROUND WTR (ft)					
BORING NO. WALL15_B-13			STATION 16+70			OFFSET 66 ft RT			ALIGNMENT -WALL15-			0 HR. 35.2		
COLLAR ELEV. 2,086.8 ft			TOTAL DEPTH 54.8 ft			NORTHING 681,585			EASTING 933,974			24 HR. FIAD		
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic					
DRILLER D. Hamilton			START DATE 10/10/23			COMP. DATE 10/10/23			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2090														
2085	2,086.0	0.8	10	8	8									2,086.8 GROUND SURFACE 0.0
														2,086.0 ROADWAY EMBANKMENT 0.8
	2,083.3	3.5	3	7	8									RESIDUAL
2080	2,080.8	6.0	24	76/0.4										Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4) 6.0
	2,078.3	8.5	24	22	39									2,078.8 WEATHERED ROCK 8.0
2075														RESIDUAL
	2,073.3	13.5	35	65/0.2										Hard, Brown, Fine to Coarse Sandy SILT (A-4), with trace mica 13.5
2070														2,073.3 WEATHERED ROCK 13.5
	2,068.3	18.5	16	22	25									WEATHERED ROCK 18.0
2065														RESIDUAL
	2,063.3	23.5	11	31	44									Hard, Brown, Fine to Coarse Sandy SILT (A-4), with trace mica 23.0
2060														2,063.8 Dense to Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4), with trace mica 23.0
	2,058.3	28.5	5	17	31									
2055														
	2,053.3	33.5	29	44	56/0.4									2,052.8 WEATHERED ROCK 34.0
2050														WEATHERED ROCK 34.0
	2,048.3	38.5	21	28	72/0.4									Brown (GNEISS)
2045														
	2,043.3	43.5	36	38	43									2,043.8 RESIDUAL 43.0
2040														Very Dense, Brown-Tan, Silty Fine to Coarse SAND (A-2-4) 43.0
	2,038.3	48.5	22	69	31/0.1									2,037.8 WEATHERED ROCK 49.0
2035														WEATHERED ROCK 49.0
	2,033.3	53.5	16	40	60/0.3									Tan-Brown (GNEISS)
														2,032.0 Boring Terminated at Elevation 2,032.0 ft In Weathered Rock (GNEISS) 54.8

NCDOT BORE DOUBLE I2513AC_GEO_GTM.GPJ NC_DOT.GDT 10/1/24

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS 34165.1.13		TIP I-2513AC		COUNTY BUNCOMBE		GEOLOGIST A. West								
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00							GROUND WTR (ft)							
BORING NO. WALL15_B-15		STATION 17+78		OFFSET 47 ft RT		ALIGNMENT -WALL15-		0 HR. 35.0						
COLLAR ELEV. 2,089.2 ft		TOTAL DEPTH 39.2 ft		NORTHING 681,692		EASTING 933,996		24 HR. FIAD						
DRILL RIG/HAMMER EFF./DATE ECS1390 AMS PowerProbe 94107% 12/20/2022				DRILL METHOD H.S. Augers			HAMMER TYPE Automatic							
DRILLER C. Osborne			START DATE 10/10/23		COMP. DATE 10/10/23		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2090														
	2,088.2	1.0	19	21	20									2,089.2 GROUND SURFACE 0.0
														2,088.2 ROADWAY EMBANKMENT 1.0
2085	2,085.7	3.5	13	13	12									
	2,083.2	6.0	13	28	28									
2080	2,080.7	8.5	8	16	17									
2075	2,075.7	13.5	32	40	40									
2070	2,070.7	18.5	20	32	32									
2065	2,065.7	23.5	38	62/0.3										2,065.7 WEATHERED ROCK 23.5
2060	2,060.7	28.5	47	53/0.4										
2055	2,055.7	33.5	52	48/0.4										
2050	2,050.7	38.5	55	45/0.2										2,050.0 Boring Terminated at Elevation 2,050.0 ft In Weathered Rock (GNEISS) 39.2

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. West						
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00											GROUND WTR (ft)				
BORING NO. WALL15_B-16			STATION 18+30			OFFSET 39 ft RT			ALIGNMENT -WALL15-			0 HR. Dry			
COLLAR ELEV. 2,090.7 ft			TOTAL DEPTH 29.1 ft			NORTHING 681,744			EASTING 934,008			24 HR. FIAD			
DRILL RIG/HAMMER EFF./DATE ECS1390 AMS PowerProbe 94107% 12/20/2022						DRILL METHOD H.S. Augers				HAMMER TYPE Automatic					
DRILLER C. Osborne			START DATE 10/10/23			COMP. DATE 10/10/23			SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)
2095															
2090	2,089.7	1.0	3	4	4									2,090.7 GROUND SURFACE 0.0	
														2,089.7 ROADWAY EMBANKMENT 1.0	
	2,087.2	3.5	4	4	7										
2085	2,084.7	6.0	8	12	14										
	2,082.2	8.5	10	22	18										
2080															
	2,077.2	13.5	75	25/0.1										2,077.2 13.5	
2075															
	2,072.2	18.5	31	35	36									2,073.7 17.0	
2070															
	2,067.2	23.5	21	46	51										
2065															
	2,062.2	28.5	31	69/0.1										2,062.2 28.5	
														2,061.6 29.1	

WBS 34165.1.13		TIP I-2513AC		COUNTY BUNCOMBE		GEOLOGIST A. West								
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00							GROUND WTR (ft)							
BORING NO. WALL15_B-17		STATION 18+72		OFFSET 33 ft RT		ALIGNMENT -WALL15-		0 HR. Dry						
COLLAR ELEV. 2,092.0 ft		TOTAL DEPTH 25.0 ft		NORTHING 681,785		EASTING 934,017		24 HR. FIAD						
DRILL RIG/HAMMER EFF./DATE ECS1390 AMS PowerProbe 94107% 12/20/2022				DRILL METHOD H.S. Augers			HAMMER TYPE Automatic							
DRILLER C. Osborne			START DATE 10/10/23		COMP. DATE 10/10/23		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2095														
	2,091.0	1.0												2,092.0 GROUND SURFACE 0.0
2090														2,091.0 ROADWAY EMBANKMENT 1.0
	2,088.5	3.5	17	14	15									Asphalt (0.7'), Stonebase (0.3')
	2,086.5	6.0	7	9	10								M	RESIDUAL
2085														Very Stiff, Brown-White-Black, Fine to Coarse Sandy SILT (A-4), with trace mica
	2,086.0	6.0											M	2,086.5 Medium Dense, Pink-White-Black, Silty Fine to Coarse SAND (A-2-4), with trace mica 5.5
	2,083.5	8.5	11	15	14								M	2,084.0 Very Stiff, Pink-White-Black, Fine to Coarse Sandy SILT (A-4) 8.0
			7	13	15								M	2,084.0 Very Stiff, Pink-White-Black, Fine to Coarse Sandy SILT (A-4) 8.0
2080														2,080.0 Very Dense, Tan-White-Black, Silty Fine to Coarse SAND (A-2-4), with trace mica and rock fragments 12.0
	2,078.5	13.5	18	20	35								M	2,080.0 Very Dense, Tan-White-Black, Silty Fine to Coarse SAND (A-2-4), with trace mica and rock fragments 12.0
2075														2,075.0 WEATHERED ROCK 17.0
	2,073.5	18.5	80	20/0.1										Tan-White (GNEISS)
2070														2,070.0 22.0
	2,068.5	23.5	8	13	20								M	2,070.0 RESIDUAL 22.0
														Hard, Tan-White, Fine to Coarse Sandy SILT (A-4), with trace mica 25.0
														Boring Terminated at Elevation 2,067.0 ft In Residual Sandy SILT (A-4)

NCDOT BORE DOUBLE I2513AC_GEO_GTM.GPJ NC_DOT.GDT 10/1/24

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS 34165.1.13		TIP I-2513AC		COUNTY BUNCOMBE		GEOLOGIST A. West										
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00							GROUND WTR (ft)									
BORING NO. WALL15_B-19		STATION 19+78		OFFSET 19 ft RT		ALIGNMENT -WALL15-		0 HR. Dry								
COLLAR ELEV. 2,095.2 ft		TOTAL DEPTH 30.0 ft		NORTHING 681,889		EASTING 934,043		24 HR. FIAD								
DRILL RIG/HAMMER EFF./DATE ECS1390 AMS PowerProbe 94107% 12/20/2022				DRILL METHOD H.S. Augers			HAMMER TYPE Automatic									
DRILLER C. Osborne			START DATE 10/09/23		COMP. DATE 10/09/23		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100	MOI					
2100																
2095																
2090	2,094.2	1.0	4	11	12								2,095.2 GROUND SURFACE 0.0			
																2,094.2 ROADWAY EMBANKMENT 1.0
	2,091.7	3.5	8	9	11											M
2085	2,089.2	6.0	4	6	8						M	RESIDUAL Stiff to Hard, Pink-Brown-White-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica and rock fragments				
	2,086.7	8.5	17	11	13						M					
2080											M					
	2,081.7	13.5	10	12	18						M					
	2,076.7	18.5	12	18	18						M					
2070											M					
	2,071.7	23.5	4	4	7						M	2,073.2 Stiff, Pink-Tan-White, Clayey SILT (A-5), with trace mica 22.0				
	2,066.7	28.5	11	12	14						M	2,068.2 Very Stiff, Brown-Black, Fine to Coarse Sandy SILT (A-4), with trace mica and rock fragments 27.0				
												2,065.2 Boring Terminated at Elevation 2,065.2 ft In Residual Sandy SILT (A-4) 30.0				

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS 34165.1.13		TIP I-2513AC		COUNTY BUNCOMBE		GEOLOGIST A. West								
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00								GROUND WTR (ft)						
BORING NO. WALL15_B-21		STATION 20+75		OFFSET 8 ft RT		ALIGNMENT -WALL15-		0 HR.	Dry					
COLLAR ELEV. 2,097.5 ft		TOTAL DEPTH 25.0 ft		NORTHING 681,983		EASTING 934,068		24 HR.	FIAD					
DRILL RIG/HAMMER EFF./DATE ECS1390 AMS PowerProbe 94107% 12/20/2022				DRILL METHOD H.S. Augers			HAMMER TYPE Automatic							
DRILLER C. Osborne			START DATE 10/09/23		COMP. DATE 10/09/23		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2100														
	2,096.4	1.1	6	8	12									2,097.5 GROUND SURFACE 0.0
2095	2,094.0	3.5	27	16	17							M		2,096.4 ROADWAY EMBANKMENT 1.1 Asphalt (0.8'), Stonebase (0.3')
	2,091.5	6.0	4	13	12							M		RESIDUAL Very Stiff to Hard, Brown-Red-White, Fine to Coarse Sandy SILT (A-4), with trace mica and rock fragments
2090	2,089.0	8.5	7	9	11							M		
												M		
2085	2,084.0	13.5	20	20	20							M		
												M		
2080	2,079.0	18.5	5	16	23							M		
2075	2,074.0	23.5	12	15	21							M		2,072.5 25.0
														Boring Terminated at Elevation 2,072.5 ft In Residual Sandy SILT (A-4)

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24


[illegible]

NCDOT BORE DOUBLE I2513AC GEO GTM.GPJ NC DOT.GDT 10/1/24

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore					
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00											GROUND WTR (ft)			
BORING NO. WALL15_B-25			STATION 22+75			OFFSET 1 ft RT			ALIGNMENT -WALL15-			0 HR. Dry		
COLLAR ELEV. 2,100.8 ft			TOTAL DEPTH 10.0 ft			NORTHING 682,171			EASTING 934,136			24 HR. FIAD		
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic					
DRILLER D. Hamilton			START DATE 10/09/23			COMP. DATE 10/09/23			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
2105														
2100	2,099.9	0.9	5	4	4									2,100.8 GROUND SURFACE 0.0
														2,099.9 ROADWAY EMBANKMENT 0.9
	2,097.3	3.5	3	8	10									2,097.8 Asphalt (0.5'), Stonebase (0.4') 3.0
2095	2,094.8	6.0	7	8	13									2,094.8 RESIDUAL 6.0
	2,092.3	8.5	5	15	12									2,094.8 Medium Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica 6.0
														2,094.8 Medium Dense, Brown, Silty Fine to Coarse SAND (A-2-4), with trace mica 6.0
														2,094.8 Very Stiff, Brown-Tan, Fine to Coarse Sandy SILT (A-4) 10.0
														2,090.8 Boring Terminated at Elevation 2,090.8 ft In Residual Sandy SILT (A-4) 10.0

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34165.1.13			TIP I-2513AC			COUNTY BUNCOMBE			GEOLOGIST A. Blackmore						
SITE DESCRIPTION RETAINING WALL NO. 15, -Y3RPA- STA. 22+48.19 TO -L- STA. 98+25.00									GROUND WTR (ft)						
BORING NO. WALL15_B-26			STATION 23+55			OFFSET 1 ft LT			ALIGNMENT -WALL15-			0 HR. Dry			
COLLAR ELEV. 2,101.6 ft			TOTAL DEPTH 10.0 ft			NORTHING 682,244			EASTING 934,168			24 HR. FIAD			
DRILL RIG/HAMMER EFF./DATE TDD417 CME75 82.7% 06/15/2021						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic						
DRILLER D. Hamilton			START DATE 10/09/23			COMP. DATE 10/09/23			SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)
2105															
2100	2,100.7	0.9	9	5	6									2,101.6 GROUND SURFACE 0.0	2,100.7 ROADWAY EMBANKMENT 0.9
2095	2,098.1	3.5	3	7	9							M		Asphalt (0.5'), Stonebase (0.4') RESIDUAL Stiff to Very Stiff, Tan-Brown, Fine to Coarse Sandy SILT (A-4), with trace mica Boring Terminated at Elevation 2,091.6 ft In Residual Sandy SILT (A-4)	
	2,095.6	6.0	5	7	9							M			
	2,093.1	8.5	3	5	5							M			

SOIL TEST RESULTS																
BORING NO.	SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
								C. SAND	F. SAND	SILT	CLAY	10	40	200		
WALL15 B-10	SS-1006	89' RT	15+16 -WALL15-	6.0-7.5	A-2-4(0)	34	2	42.0	26.1	23.2	8.6	89.5	62.1	34.0	14.1	-
WALL15 B-10	SS-1013	89' RT	15+16 -WALL15-	38.5-40.0	A-2-4(0)	36	4	38.7	33.2	19.5	8.7	90.1	68.1	31.5	19.6	-
WALL15 B-14	SS-972	57' RT	17+23 -WALL15-	6.0-7.5	A-2-4(0)	36	2	41.1	31.7	16.5	10.6	96.3	70.8	32.1	17.6	-
WALL15 B-24	SS-960	1' RT	22+20 -WALL15-	1.0-2.5	A-2-4(0)	37	5	37.6	34.4	21.5	6.6	93.5	71.3	33.0	13.1	-

LAB TECHNICIAN: DANIEL REEVE

NCDOT CERTIFICATION NO. 135-03-0816