PROJECT REFERENCE NO.	SHEET NO.
R-4903	Sig. 2.1

EDI MODEL 2010ECL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

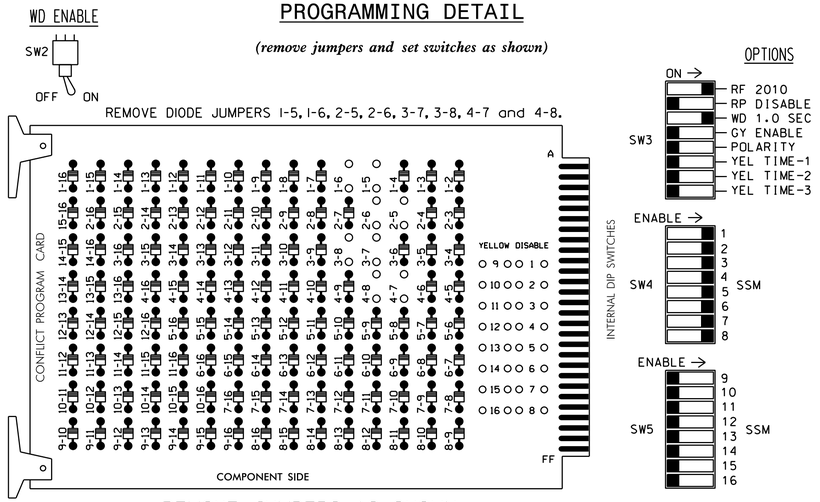

REMOVE JUMPERS AS SHOWN

■ = DENOTES POSITION OF SWITCH

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Make sure jumpers SEL2-SEL5 are present on the monitor board.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Ensure that Red Enable is active at all times during normal operation. To prevent Red Failures on unused monitor channels, tie unused red monitor inputs 9,10, 11,12,13,14,15 & 16 to load switch AC+ per the cabinet manufacturer's instructions.
3. Enable Simultaneous Gap-Out for all phases.
4. Program phases 2 and 6 for Variable Initial and Gap Reduction.
5. Program phases 2 and 6 for Start Up In Green.
6. Program phases 2 and 6 for Yellow Flash.
7. The cabinet and controller are part of the Elizabethtown CLS.

EQUIPMENT INFORMATION

CONTROLLER.....2070L
CABINET 332
SOFTWARE .....ECONOLITE OASIS
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS..18 (12-STD, 6-AUX)
LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8
PHASES USED.....1,2,3,4,5,6,7,8
OVERLAPS.....NONE

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1		S2	S2P	S3	S4	S4P	S5		S6	S6P	S7	S8	S8P	S9	S10	S11	S12	S13	S14
PHASE	1		2	2 PED	3	4	4 PED	5		6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	82	21,22	NU	31	41,42	NU	51	42	61,62	NU	71	81,82	NU	NU	NU	NU	NU	NU	NU
RED			128			101				134			107							
YELLOW			129			102				135			108							
GREEN			130			103				136			109							
RED ARROW	125				116			131				122								
YELLOW ARROW	126	126			117			132	132			123								
GREEN ARROW	127	127			118			133	133			124								

NU = Not Used

!!IMPORTANT!!

BEFORE PROGRAMMING CONTROLLER, BE SURE TO LOAD DEFAULT PARAMETERS.

INPUT FILE POSITION LAYOUT

(front view)

		1	2	3	4	5	6	7	8	9	10	11	12	13	14
FILE "I"	U	Ø 1	Ø 1	SLOT	SLOT	Ø 3	Ø 4	Ø 8	SLOT	SLOT	SLOT	SLOT	SLOT	SLOT	FS
		1A	1B			3A	4A	8A							DC ISOLATOR
	L	NOT USED	Ø2/SYS	EMPTY	EMPTY	NOT USED	Ø 4	Ø 8	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	ST
			2A/SD15				4B	8B							DC ISOLATOR
FILE "J"	U	Ø 5	Ø 5	SLOT	SLOT	Ø 7	SLOT	SLOT	SLOT	SLOT	SLOT	SLOT	SLOT	SLOT	SLOT
		5A	5B			7A									
	L	NOT USED	Ø6/SYS	EMPTY	EMPTY	NOT USED	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY	EMPTY
			6A/SD14												

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A	TB2-1,2	I1U	56	18	1	1	Y	Y			
1B	TB2-5,6	I2U	39	1	2	1	Y	Y			15
2A/SD15	TB2-7,8	I2L	43	5	12	2/SYS	Y	Y			
3A	TB4-5,6	I5U	58	20	3	3	Y	Y			3
4A	TB4-9,10	I6U	41	3	4	4		Y		3.2	
4B	TB4-11,12	I6L	45	7	14	4	Y	Y			
5A	TB3-1,2	J1U	55	17	5	5	Y	Y			
5B	TB3-5,6	J2U	40	2	6	5	Y	Y			15
6A/SD14	TB3-7,8	J2L	44	6	16	6/SYS	Y	Y			
7A	TB5-5,6	J5U	57	19	7	7	Y	Y			3
8A	TB6-1,2	I7U	65	27	34	8		Y		3.2	
8B	TB6-3,4	I7L	78	40	44	8	Y	Y			

INPUT FILE POSITION LEGEND: J2L
FILE J
SLOT 2
LOWER

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0765T1
DESIGNED: May 2014
SEALED: 7/1/2014
REVISED: N/A

Electrical Detail - Temporary I

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared in the Offices of:
Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
Signal Management Section
750 N.Greenfield Pkwy,Garner,NC 27529

NC 87 Bypass
at
US 701 Business

Division 6 | Bladen County | Elizabethtown

PLAN DATE:	June 2014	REVIEWED BY:	T. Joyce
PREPARED BY:	B. Simmons	REVIEWED BY:	

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 022013 ENGINEER GEORGE C. BROWN

DocuSigned by:
George C. Brown 7/2/2014
DATE

SIG. INVENTORY NO. 06-0765T1

02-JUL-2014 09:19
S:\TIMS\41S\Signals\Workgroups\Sig Man\Simmons\Working Folder\Electrical Details\Division 06\06-0765T1_sm_ele_xxx.dgn
bsimmons